



华泰液压

景县华泰液压橡塑制品有限公司

Jingxian Huatai Hydraulic Rubber Products Co., Ltd.

细节决定成败 品质成就未来

企业简介
Company Profile



景县华泰液压橡塑制品有限公司位于闻名遐迩的高压胶管、液压管件之乡——河北省景县经济开发区，是集科研、创造、销售于一体的科技型企业。公司技术力量雄厚、工艺设备先进、检测手段齐全、产品质量可靠，专业生产液压软管接头、不锈钢接头、过渡接头、煤矿K型接头、软管总成等，产品广泛应用于工程机械、煤矿机械、农用机械、冶金和石油装备等机械设备的液压连接、动力和控制系统。

公司创建于1987年，现有员工200余人，合计占地30000平方米。

公司技术力量雄厚，拥有先进的生产和检测设备。现有精密自动数控车床、弯管机、扣压机、锻压机床等400余台，具备年产液压接头1000万件的生产能力。拥有投影仪、碳硫分析仪、盐雾试验等检测设备，为生产高品质的产品提供了可靠的检测保障。

公司通过了CE、ISO9001等质量认证体系，和优质客户共同高速发展。

公司始终秉承“人诚品真”的理念，精诚铸就品牌，悉心创造辉煌。产品主要出口欧、美、澳、亚、非等30多个国家和地区。放眼未来，我们将全力提升保质、保量、保交期的能力，为推动高质量发展不懈努力！



Jingxian Huatai Hydraulic Rubber Products Co.,Ltd, which located in the economic development area of Jingxian Hebei province—the hometown of hydraulic hose fitting, is a scientific research, manufacturing and sales of hi-tech enterprise. The company owns strong technical force, advanced technological equipment, complete detection means and reliable product quality. The main products include hydraulic hose fitting, stainless steel fitting, adapter, flange, mining K-type fitting and hose assembly etc.. The products are widely used on hydraulic connection, power and control system of construction machinery, mining machinery, agriculture machinery, metallurgical equipment, wind power and etc..

HT Hydraulics is founded in 1987. Around 200 employee, 30,000 square meter.

With solid technical capability, there are over 400 units of the advanced equipment in HT Hydraulics for production and inspection, such as precise automatic CNC machine, bending machine, crimp machine, hot forging machine. The annual production capacity has achieved 10 million pieces of hydraulic fitting. The inspection equipment such as projector for size, carbon sulfur analyzer and salt-spray test equipment provide credible monitoring for high quality performance.

HT Hydraulics has got CE and ISO9001 certification and is in the rapid development together with excellent customers.

HT Hydraulics sticks to the core ideology “People Sincere, Quality Real”, endeavours to build the brand and devote all attention to make success. Export business mainly conduct with more than 30 countries and area in Europe, American, Australia, Asia and Africa. In the future, HT Hydraulics will fully enhance the capability on quality and velocity. Struggling to facilitate development!

设备篇



冲床
Punching Machine



影像仪
Projector



扣压机
Crimp Machine




精密深孔加工枪钻
Precision Deep
Gun Drilling Machine



碳硫分析仪
Carbon Sulfur Analyzer



弯管机
Bending Machine



硬度计
Sclerometer




投影仪
Projector



盐雾试验机
Salt-spray Test Machine


Y00018



SAE 100R7/R8软管套筒
Ferrule For SAE 100 R7/R8 Hose

代号 PART NO.	软管 HOSE BORE		尺寸 DIMENSIONS	
	公称内径 DN	标号 DASH	L	D
Y00018-02	4	02	25	13.5
Y00018-03	5	03	27	15
Y00018-04	6	04	30	18
Y00018-04A	6	04	29	14
Y00018-05	8	05	30	18.8
Y00018-06	10	06	34	21
Y00018-08	13	08	34	25.5
Y00018-08A	13	08	34	27.2
Y00018-10	16	10	37	31.5
Y00018-10A	16	10	37	28.6
Y00018-12	19	12	43	33


Y00100



GB 3863 1型,DIN 20022 1ST,SAE 100 R1A软管套筒
For GB3863 1Type,DIN 20022 1ST,SAE 100 R1A Hose Ferrule

代号 PART NO.	软管 HOSE BORE		尺寸 DIMENSIONS	
	公称内径 DN	标号 DASH	L	D
Y00100-04	6	04	30	20
Y00100-05	8	05	31	21
Y00100-06	10	06	32	23
Y00100-08	13	08	34	28.5
Y00100-10	16	10	37	32
Y00100-12	19	12	42	35
Y00100-16	25	16	50	43
Y00100-20	32	20	59	50.5
Y00100-24	38	24	72	57
Y00100-32	51	32	74	70


Y00200



GB 3863 2型,DIN 20022 2ST,SAE 100 R2A软管套筒
For Gb3863 2 Type,DIN 20022 2ST,SAE 100 R2A Hose Ferrule

代号 PART NO.	软管 HOSE BORE		尺寸 DIMENSIONS	
	公称内径 DN	标号 DASH	L	D
Y00200-04	6	04	30	21
Y00200-05	8	05	31	22.5
Y00200-06	10	06	32	24
Y00200-08	13	08	34	28.7
Y00200-10	16	10	37	31.5
Y00200-12	19	12	43	36
Y00200-16	25	16	50	44
Y00200-20	32	20	59	54.5
Y00200-24	38	24	74	62
Y00200-32	51	32	78	75


Y00110A



改进型 SAE 100RIAT/DIN 20022 1SN软管套筒
Ferrule For SAE 100RIAT/DIN 20022 SN Hose

代号 PART NO.	软管 HOSE BORE		尺寸 DIMENSIONS	
	公称内径 DN	标号 DASH	L	D
Y00110-04A	6	04	30	21
Y00110-05A	8	05	31	21.8
Y00110-06A	10	06	32	24.3
Y00110-08A	13	08	34	28.4
Y00110-10A	16	10	37	32
Y00110-12A	19	12	43	35.5
Y00110-16A	25	16	50	44
Y00110-20A	32	20	59	53
Y00110-24A	38	24	74	59.3
Y00110-32A	51	32	78	73.5


Y00110



SAE 100RIAT/DIN 20022 1SN软管套筒
Ferrule For SAE 100RIAT/DIN 20022 SN Hose

代号 PART NO.	软管 HOSE BORE		尺寸 DIMENSIONS	
	公称内径 DN	标号 DASH	L	D
Y00110-04	6	04	30	20.6
Y00110-05	8	05	31	20.8
Y00110-06	10	06	32	23.3
Y00110-08	13	08	34	27
Y00110-10	16	10	37	32
Y00110-12	19	12	43	34
Y00110-16	25	16	50	42.6
Y00110-20	32	20	59	52
Y00110-24	38	24	74	58
Y00110-32	51	32	78	72

Y00210



GB 3863 2型,DIN 20022 2ST,SAE 100 R2AT软管套筒
For Gb3863 2 Type,DIN 20022 2ST,SAE 100 R2AT Hose Ferrule

代号 PART NO.	软管 HOSE BORE		尺寸 DIMENSIONS	
	公称内径 DN	标号 DASH	L	D
Y00210-04	6	04	30	22.3
Y00210-05	8	05	31	23
Y00210-06	10	06	32	25
Y00210-08	13	08	34	28.7
Y00210-10	16	10	37	31.5
Y00210-12	19	12	43	35.5
Y00210-16	25	16	50	45
Y00210-20	32	20	59	55
Y00210-24	38	24	74	62.5
Y00210-32	51	32	78	75.5


注：不推荐用于工程机械类。 Don't recommend for engineering machine.

Y03310 SAE R2AT DIN 20022 2SN 软管套筒
Ferrule For SAE R2AT DIN 20022 2SN Hose



代号 PART NO.	软管 HOSE BORE		尺寸 DIMENSIONS	
	公称内径 DN	标号 DASH	L	D
Y03310-04	6	04	30	23.2
Y03310-05	8	05	30	24
Y03310-06	10	06	32	26.3
Y03310-08	13	08	34	29.9
Y03310-10	16	10	36	33.2
Y03310-12	19	12	42	37.8
Y03310-16	25	16	50	46.9
Y03310-20	32	20	59	59
Y03310-24	38	24	72	67
Y03310-32	51	32	75	80

Y01300 国产三层钢丝编织软管套筒
Ferrule For China Standard 3-steel Wire Braid Hose




代号 PART NO.	软管 HOSE BORE		尺寸 DIMENSIONS	
	公称内径 DN	标号 DASH	L	D
Y01300-05	8	05	32	25.5
Y01300-08	13	08	34	33
Y01300-10	16	10	39	36
Y01300-12	19	12	43	39
Y01300-16	25	16	50	45
Y01300-20	32	20	59	53
Y01300-24	38	24	74	59
Y01300-32	51	32	78	72

Y01100 国产一层钢丝编织软管套筒
Ferrule For China Standard 1-steel Wire Braid Hose



代号 PART NO.	软管 HOSE BORE		尺寸 DIMENSIONS	
	公称内径 DN	标号 DASH	L	D
Y01100-04	6	04	30	19
Y01100-05	8	05	32	21
Y01100-06	10	06	32	23
Y01100-08	13	08	34	28
Y01100-10	16	10	37	31
Y01100-12	19	12	43	34
Y01100-16	25	16	50	41
Y01100-20	32	20	59	49
Y01100-24	38	24	74	55

Y01400 SAE 100 R12/20-24 GB 10544 5型 软管套筒
Ferrule For SAE 100 R12/20-24 GB 10544 5Type Hose




代号 PART NO.	软管 HOSE BORE		尺寸 DIMENSIONS	
	公称内径 DN	标号 DASH	L	D
Y01400-06	10	06	39	27.5
Y01400-08	13	08	41	31.5
Y01400-10	16	10	43	34
Y01400-12	19	12	51	39
Y01400-16	25	16	61.5	46.5
Y01400-20	32	20	67.5	55.5
Y01400-24	38	24	75	63.5
Y01400-32	51	32	79	78

Y01200 国产二层钢丝编织软管套筒
Ferrule For China Standard 2-steel Wire Braid Hose



代号 PART NO.	软管 HOSE BORE		尺寸 DIMENSIONS	
	公称内径 DN	标号 DASH	L	D
Y 01200-04	6	04	30	21
Y 01200-05	8	05	31	23
Y 01200-06	10	06	32	25
Y 01200-08	13	08	34	31
Y 01200-10	16	10	39	34
Y 01200-12	19	12	43	37
Y 01200-16	25	16	50	43
Y 01200-20	32	20	59	51
Y 01200-24	38	24	74	57

Y00400 SAE 100 R12/06-16 GB 10544 3型/20-32, DIN 20023-4P, 4SH/10-16 软管套筒
Ferrule For SAE 100 R12/06-16 ,GB 10544 3 Type/20-32, DIN 20023-4P,4SH/10-16 Hose




代号 PART NO.	软管 HOSE BORE		尺寸 DIMENSIONS	
	公称内径 DN	标号 DASH	L	D
Y00400-04	6	04	37.5	22
Y00400-06	10	06	39	25.5
Y00400-08	13	08	41	29
Y00400-10	16	10	43	34
Y00400-12	19	12	51	37
Y00400-16	25	16	61.5	46.5
Y00400-20	32	20	67.5	57
Y00400-24	38	24	75	65
Y00400-32	51	32	79	79



套筒 FERRULE

Y00401


DIN 20023-4SH 软管套筒
Ferrule For DIN 20023-4SH Hose



代号 PART NO.	软管 HOSE BORE		尺寸 DIMENSIONS	
	公称内径 DN	标号 DASH	L	D
Y00401-20	32	20	67.5	53
Y00401-24	38	24	75	61
Y00401-32	51	32	79	77


Y00621

SAE 100 R13/R15 4SH/12-16 软管剥内外胶套筒
Interlock Ferrule For SAE 100 R13/R15 4SH/12-16 Hose




代号 PART NO.	软管 HOSE BORE		尺寸 DIMENSIONS	
	公称内径 DN	标号 DASH	L	D
Y00621-12	19	12	53	39.5
Y00621-16	25	15	66	48.5
Y00621-20	32	20	88	59
Y00621-24	38	24	102	69.3
Y00621-32	51	32	106	84.45

软管接头 Hydraulic Hose Fitting




Y10411-RW

 公制外螺纹24°内锥面轻系列
Metric Male 24° Cone Seat L.T.ISO 12151-2 -DIN3861


代号 PART NO.	螺纹 T THREAD T	软管 HOSE BORE		管子外径 TUBE O.D		尺寸 DIMENSIONS		
		公称内径DN	标号 DASH	L	D	L	H	S1
Y10411-12-04RW	M12X1.5	6	04	6	13.5	6		14
Y10411-14-04RW	M14X1.5	6	04	8	13.5	8		17
Y10411-14-05RW	M14X1.5	8	05	8	14.5	8		17
Y10411-16-04RW	M16X1.5	6	04	10	16.5	10		17
Y10411-16-05RW	M16X1.5	8	05	10	16.5	10		17
Y10411-16-06RW	M16X1.5	10	06	10	16.5	10		17
Y10411-18-05RW	M18X1.5	8	05	12	16.5	12		19
Y10411-18-06RW	M18X1.5	10	06	12	16.5	12		19
Y10411-22-06RW	M22X1.5	10	06	15	17.5	15		24
Y10411-22-08RW	M22X1.5	13	08	15	18	15		24
Y10411-26-08RW	M26X1.5	13	08	18	19	18		27
Y10411-26-10RW	M26X1.5	16	10	18	19.5	18		27
Y10411-30-10RW	M30X2	16	10	22	22.5	22		32
Y10411-30-12RW	M30X2	19	12	22	22.5	22		32
Y10411-36-16RW	M36X2	25	16	28	25.5	28		41
Y10411-45-20RW	M45X2	32	20	35	27.5	35		46
Y10411-52-24RW	M52X2	38	24	42	27.5	42		55

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为Y10412-XX-XXRW Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is Y10412-XX-XXRW.


Y20441-TRW

 45°弯公制外螺纹24°锥带O型轻系列
45°Metric Female 24°Cone O-ring L.T.ISO 12151-2 -DIN3865


代号 PART NO.	螺纹 T THREAD T	软管 HOSE BORE		管子直径 TUBE O.E.	尺寸 DIMENSIONS		
		公称内径DN	标号 DASH		L	H	S1
Y20441-14-04TRW	M14X1.5	6	04	8	39.8	16	17
Y20441-16-04TRW	M16X1.5	6	04	10	40.8	17	19
Y20441-16-05TRW	M16X1.5	8	05	10	40.7	17	19
Y20441-18-05TRW	M18X1.5	8	05	12	42.2	18.5	22
Y20441-18-06TRW	M18X1.5	10	06	12	44.5	18.5	22
Y20441-22-08TRW	M22X1.5	13	08	15	50.8	19.5	27
Y20441-26-08TRW	M26X1.5	13	08	18	54.8	23.5	32
Y20441-26-10TRW	M26X1.5	16	10	18	62.7	23.5	32
Y20441-30-10TRW	M30X2	16	10	22	64.7	25.5	36
Y20441-30-12TRW	M30X2	19	12	22	68.2	25.5	36
Y20441-36-12TRW	M36X2	19	12	28	74.7	32	41
Y20441-36-16TRW	M36X2	25	16	28	81.4	32	41
Y20411-45-16TRW	M45X2	25	16	35	87.4	38	50
Y20411-45-20TRW	M45X2	32	20	35	98.8	38	50
Y20441-52-20TRW	M52X2	32	20	42	105.3	44.5	60
Y20441-52-24TRW	M52X2	38	24	42	115.6	44.5	60

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为Y20441-XX-XXTRW Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is Y20441-XX-XXTRW.


Y20411-TRW

 公制内螺纹24°锥带O型轻系列
Metric Female 24°Cone O-ring L.T.ISO 12151-2 -DIN3865


代号 PART NO.	螺纹 T THREAD T	软管 HOSE BORE		管子直径 TUBE O.E.	尺寸 DIMENSIONS		
		公称内径DN	标号 DASH		L	S1	H
Y20411-12-04TRW	M12X1.5	6	04	6	26	17	
Y20411-14-04TRW	M14X1.5	6	04	8	23.5	17	
Y20411-16-04TRW	M16X1.5	6	04	10	20.5	19	
Y20411-16-05TRW	M16X1.5	8	05	10	25.5	19	
Y20411-18-05TRW	M18X1.5	8	05	12	23.5	22	
Y20411-18-06TRW	M18X1.5	10	06	12	26.5	22	
Y20411-22-08TRW	M22X1.5	13	08	15	28.5	27	
Y20411-26-08TRW	M26X1.5	13	08	18	30	32	
Y20411-26-10TRW	M26X1.5	16	10	18	32	32	
Y20411-30-10TRW	M30X2	16	10	22	32.5	36	
Y20411-30-12TRW	M30X2	19	12	22	33.5	36	
Y20411-36-12TRW	M36X2	19	12	28	35	41	
Y20411-36-16TRW	M36X2	25	16	28	36	41	
Y20411-45-16TRW	M45X2	25	16	35	34	50	
Y20411-45-20TRW	M45X2	32	20	35	35	50	
Y20411-52-20TRW	M52X2	32	20	42	38	60	
Y20411-52-24TRW	M52X2	38	20	42	38	60	

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为Y20412-XX-XXTRW Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is Y20412-XX-XXTRW.

Y20491-TRW


 90°弯公制外螺纹24°锥带O型轻系列
90°Metric Female 24°Cone O-ring L.T.ISO 12151-2 -DIN3865


代号 PART NO.	螺纹 T THREAD T	软管 HOSE BORE		管子直径 TUBE O.E.	尺寸 DIMENSIONS		
		公称内径DN	标号 DASH		L	H	S1
Y20491-14-04TRW	M14X1.5	6	04	8	32	30.5	17
Y20491-16-04TRW	M16X1.5	6	04	10	32	33	19
Y20491-16-05TRW	M16X1.5	8	05	10	32.5	33	19
Y20491-18-05TRW	M18X1.5	8	05	12	32.5	36	22
Y20491-18-06TRW	M18X1.5	10	06	12	36.5	36	22
Y20491-22-08TRW	M22X1.5	13	08	15	44.5	40.5	27
Y20491-26-08TRW	M26X1.5	13	08	18	44.5	51.5	32
Y20491-26-10TRW	M26X1.5	16	10	18	55	51.5	32
Y20491-30-10TRW	M30X2	16	10	22	55	56	36
Y20491-30-12TRW	M30X2	19	12	22	62	56	36
Y20491-36-12TRW	M36X2	19	12	28	62	68.5	41
Y20491-36-16TRW	M36X2	25	16	28	74	68.5	41
Y20491-45-16TRW	M45X2	25	16	35	74	78.5	50
Y20491-45-20TRW	M45X2	32	20	35	91.5	78.5	50
Y20491-52-20TRW	M52X2	32	20	42	91.5	95	60
Y20491-52-24TRW	M52X2	38	24	42	108	95	60

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为Y20492-XX-XXTRW Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is Y20492-XX-XXTRW.




Y10511-RW

公制外螺纹24°锥面重系列
Metric Male 24° Cone Seat H.T.ISO 12151-2 -DIN3861

代号 PART NO.	螺纹T THREAD T	软管 HOSE BORE		管子直径 TUBE O.D.	尺寸 DIMENSIONS		
		公称内径DN	标号 DASH		L	D	S1
Y10511-14-04RW	M14X1.5	6	04	6	24	6	14
Y10511-16-04RW	M16X1.5	6	04	8	26.5	8	17
Y10511-18-04RW	M18X1.5	6	04	10	26.5	10	19
Y10511-18-06RW	M18X1.5	10	06	10	27	10	19
Y10511-20-05RW	M20X1.5	8	05	12	28	12	22
Y10511-20-06RW	M20X1.5	10	06	12	28	12	22
Y10511-22-06RW	M22X1.5	10	06	14	28.5	14	24
Y10511-24-08RW	M24X1.5	13	08	16	32	16	27
Y10511-30-10RW	M30X2	16	10	20	36	20	32
Y10511-30-12RW	M30X2	19	12	20	36	20	32
Y10511-36-12RW	M36X2	19	12	25	40	25	41
Y10511-36-16RW	M36X2	25	16	25	41	25	41
Y10511-42-16RW	M42X2	25	16	30	43	30	46
Y10511-52-20RW	M52X2	32	20	38	48	38	55

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为Y10512-XX-XXRW Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is Y10512-XX-XXRW.


Y20541-TRW

45°公制内螺纹24°锥 带型重系列
45°Metric Female 24°Cone O-Ring H.T.ISO 12151-2 -DIN3865

代号 PART NO.	螺纹T THREAD T	软管 HOSE BORE		管子直径 TUBE O.E.	尺寸 DIMENSIONS		
		公称内径DN	标号 DASH		L	H	S1
Y20541-16-04TRW	M16X1.5	6	04	8	40.8	17	19
Y20541-18-04TRW	M18X1.5	6	04	10	40.8	17	22
Y20541-18-05TRW	M18X1.5	8	05	10	41.7	18	22
Y20541-18-06TRW	M18X1.5	10	06	10	44.5	18.5	22
Y20541-20-05TRW	M20X1.5	8	05	12	41.7	18	24
Y20541-20-06TRW	M20X1.5	10	06	12	44.5	18.5	24
Y20541-22-06TRW	M22X1.5	10	06	14	48.9	22.9	27
Y20541-24-08TRW	M24X1.5	13	08	16	52.3	21	30
Y20541-30-10TRW	M30X2	16	10	20	64.2	25	36
Y20541-30-12TRW	M30X2	19	12	20	73.2	30.5	36
Y20541-36-12TRW	M36X2	19	12	25	73.2	30.5	46
Y20541-36-16TRW	M36X2	25	16	25	84.9	35.5	46
Y20541-42-16TRW	M42X2	25	16	30	84.9	35.5	50
Y20541-52-20TRW	M52X2	32	20	38	102.75	42	60

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为Y20542-XX-XXTRW Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is Y20542-XX-XXTRW.


Y20511-TRW

公制内螺纹24°锥带O型重系列
Metric Female 24°Cone O-Ring H.T.ISO 12151-2 -DIN3865

代号 PART NO.	螺纹T THREAD T	软管 HOSE BORE		管子直径 TUBE O.E.	尺寸 DIMENSIONS		
		公称内径DN	标号 DASH		L	H	S1
Y20511-16-04TRW	M16X1.5	6	04	8	24		19
Y20511-18-04TRW	M18X1.5	6	04	10	25		22
Y20511-18-05TRW	M18X1.5	8	05	10	25		22
Y20511-18-06TRW	M18X1.5	10	06	10	25		22
Y20511-20-05TRW	M20X1.5	8	05	12	25.5		24
Y20511-20-06TRW	M20X1.5	10	06	12	25.5		24
Y20511-22-06TRW	M22X1.5	10	06	14	25.5		27
Y20511-24-08TRW	M24X1.5	13	08	16	30		30
Y20511-30-10TRW	M30X2	16	10	20	34		36
Y20511-30-12TRW	M30X2	19	12	20	35		36
Y20511-36-12TRW	M36X2	19	12	25	32		46
Y20511-36-16TRW	M36X2	25	16	25	35.5		46
Y20511-42-16TRW	M42X2	25	16	30	36		50
Y20511-52-20TRW	M52X2	32	20	38	36		60

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为Y20512-XX-XXTRW Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is Y20512-XX-XXTRW.

Y20591-TRW


90°弯公制内螺纹24°锥 带型重系列
90°Metric Female 24°Cone O-Ring H.T.ISO 12151-2 -DIN3865

代号 PART NO.	螺纹T THREAD T	软管 HOSE BORE		管子直径 TUBE O.E.	尺寸 DIMENSIONS		
		公称内径DN	标号 DASH		L	H	S1
Y20591-16-04TRW	M16X1.5	6	04	8	32	32	19
Y20591-18-04TRW	M18X1.5	6	04	10	32	32	22
Y20591-18-05TRW	M18X1.5	8	05	10	32.5	34	22
Y20591-18-06TRW	M18X1.5	10	06	10	36.5	35.5	22
Y20591-20-05TRW	M20X1.5	8	05	12	32.5	34	24
Y20591-20-06TRW	M20X1.5	10	06	12	36.5	35.5	24
Y20591-22-06TRW	M22X1.5	10	06	14	36.5	43	27
Y20591-24-08TRW	M24X1.5	13	08	16	44.5	43	30
Y20591-30-10TRW	M30X2	16	10	20	55	49.5	36
Y20591-30-12TRW	M30X2	19	12	20	62	59	36
Y20591-36-12TRW	M36X2	19	12	25	62	59	46
Y20591-36-16TRW	M36X2	25	16	25	74	70	46
Y20591-42-16TRW	M42X2	25	16	30	74	70	50
Y20591-52-20TRW	M52X2	32	20	38	91.5	87	60

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为Y20592-XX-XXTRW Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is Y20592-XX-XXTRW.

Y12611A-RW

英管外螺纹60°锥面或六角端面组合垫密封的双用接头
BSP Male Double Use For 60° Cone Seat Or Bonded Seal ISO 12151-6




代号 PART NO.	螺纹 T THREAD T	软管 HOSE BORE		尺寸 DIMENSIONS		
		公称内径DN	标号 DASH	L	H	S1
Y12611A-04-04RW	G1/4"X19	6	04	25.5		19
Y12611A-06-05RW	G3/8"X19	8	05	27.5		22
Y12611A-06-06RW	G3/8"X19	10	06	26		22
Y12611A-06-08RW	G3/8"X19	13	08	28		22
Y12611A-08-06RW	G1/2"X14	10	06	32		27
Y12611A-08-08RW	G1/2"X14	13	08	33		27
Y12611A-08-10RW	G1/2"X14	16	10	34		27
Y12611A-10-08RW	G5/8"X14	13	08	36		30
Y12611A-10-10RW	G5/8"X14	16	10	37		30
Y12611A-12-08RW	G3/4"X14	13	08	35		32
Y12611A-12-10RW	G3/4"X14	16	10	36		32
Y12611A-12-12RW	G3/4"X14	19	12	37		32
Y12611A-16-12RW	G1"X11	19	12	39		41
Y12611A-16-16RW	G1"X11	25	16	42		41
Y12611A-20-16RW	G1.1/4"X11	25	16	45		50
Y12611A-20-20RW	G1.1/4"X11	32	20	45		50
Y12611A-24-20RW	G1.1/2"X11	32	20	49		55
Y12611A-24-24RW	G1.1/2"X11	38	24	49		55
Y12611A-32-32RW	G2"X11	51	32	54.5		70

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为Y12612-XX-XXRW Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is Y12612-XX-XXRW.

Y22641-RW

45°英管内螺纹60°外锥面
45°BSP Female 60° Cone ISO 12151-6




代号 PART NO.	螺纹 T THREAD T	软管 HOSE BORE		尺寸 DIMENSIONS		
		公称内径DN	标号 DASH	L	H	S1
Y22641-04-04RW	G1/4"X19	6	04	38.8	15	19
Y22641-04-05RW	G1/4"X19	8	05	41.7	18	19
Y22641-06-04RW	G3/8"X19	6	04	39.8	16	22
Y22641-06-05RW	G3/8"X19	8	05	41.7	18	22
Y22641-06-06WR	G3/8"X19	10	06	44	18	22
Y22641-06-08RW	G3/8"X19	13	08	54.3	23	22
Y22641-08-08RW	G1/2"X14	13	08	51.3	20	27
Y22641-10-08RW	G5/8"X14	13	08	54.3	23	30
Y22641-10-10RW	G5/8"X14	16	10	64.2	25	30
Y22641-12-10RW	G3/4"X14	16	10	67.2	28	32
Y22641-12-12RW	G3/4"X14	19	12	71.7	29	32
Y22641-16-16RW	G1"X11	25	16	84.4	35	41
Y22641-20-20RW	G1.1/4"X11	32	20	100.8	40	50
Y22641-24-24RW	G1.1/2"X11	38	24	121.1	50	55
Y22641-32-32RW	G2"X11	51	32	155	70	70

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为Y22642-XX-XXRW Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is Y22642-XX-XXRW.

Y22611-RW

英管内螺纹60°外锥面
BSP Female 60° Cone ISO 12151-6




代号 PART NO.	螺纹 T THREAD T	软管 HOSE BORE		尺寸 DIMENSIONS		
		公称内径DN	标号 DASH	L	H	S1
Y22611-02-04RW	G1/8"X28	6	04	15		14
Y22611-04-04RW	G1/4"X19	6	04	19		19
Y22611-04-05RW	G1/4"X19	8	05	19		19
Y22611-04-06RW	G1/4"X19	10	06	19		19
Y22611-06-04RW	G3/8"X19	6	04	19.5		22
Y22611-06-05RW	G3/8"X19	8	05	19		22
Y22611-06-06RW	G3/8"X19	10	06	19.5		22
Y22611-06-08RW	G3/8"X19	13	08	20		22
Y22611-08-08RW	G1/2"X14	13	08	21.5		27
Y22611-10-08RW	G5/8"X14	13	08	22.5		30
Y22611-10-10RW	G5/8"X14	16	10	23		30
Y22611-12-10RW	G3/4"X14	16	10	24		32
Y22611-12-12RW	G3/4"X14	19	12	24		32
Y22611-16-14RW	G1"X11	22	14	26		41
Y22611-16-16RW	G1"X11	25	16	27		41
Y22611-20-20RW	G1.1/4"X11	32	20	30.5		50
Y22611-24-24RW	G1.1/2"X11	38	24	31.5		55
Y22611-32-32RW	G2"X11	51	32	34		70

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为Y22612-XX-XXRW Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is Y22612-XX-XXRW.

Y22691-RW

90°英管内螺纹60°外锥面
90°BSP Female 60° Cone ISO 12151-6




代号 PART NO.	螺纹 T THREAD T	软管 HOSE BORE		尺寸 DIMENSIONS		
		公称内径DN	标号 DASH	L	H	S1
Y22691-02-04RW	G1/8"X28	6	04	32	27	14
Y22691-04-04RW	G1/4"X19	6	04	32	28	19
Y22691-04-05RW	G1/4"X19	8	05	32.5	31.5	19
Y22691-04-06RW	G1/4"X19	10	06	36.5	34	19
Y22691-06-04RW	G3/8"X19	6	04	32	31	22
Y22691-06-05RW	G3/8"X19	8	05	32.5	34	22
Y22691-06-06RW	G3/8"X19	10	06	36.5	34	22
Y22691-08-08RW	G1/2"X14	13	08	44.5	41	27
Y22691-10-08RW	G5/8"X14	13	08	44.5	45	30
Y22691-10-10RW	G5/8"X14	16	10	55	51	30
Y22691-12-10RW	G3/4"X14	16	10	55	56	32
Y22691-12-12RW	G3/4"X14	19	12	62	58	32
Y22691-16-16RW	G1"X11	25	16	74	70	41
Y22691-20-20RW	G1.1/4"X11	32	20	91.5	85	50
Y22691-24-24RW	G1.1/2"X11	38	24	108	100	55
Y22691-32-32RW	G2"X11	51	32	133.8	140	70

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为Y22692-XX-XXRW Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is Y22692-XX-XXRW.




Y16711-RW

美制JIC外螺纹74°外锥面
JIC Male 74° Cone ISO 12151-5 -SAE J514

代号 PART NO.	螺纹T THREAD T	软管 HOSE BORE		尺寸 DIMENSIONS		
		公称内径DN	标号 DASH	L	H	S1
Y16711-04-04RW	7/16"X20	6	04	26.5		12
Y16711-05-04RW	1/2"X20	6	04	26.5		14
Y16711-05-05RW	1/2"X20	8	05	26.5		14
Y16711-05-06RW	1/2"X20	10	06	26.5		17
Y16711-06-04RW	9/16"X18	6	04	26.5		17
Y16711-06-05RW	9/16"X18	8	05	26.5		17
Y16711-06-06RW	9/16"X18	10	06	26.5		17
Y16711-08-06RW	3/4"X16	10	06	31		22
Y16711-08-08RW	3/4"X16	13	08	31.5		22
Y16711-10-06RW	7/8"X14	10	06	32		24
Y16711-10-08RW	7/8"X14	13	08	34.5		24
Y16711-10-10RW	7/8"X14	16	10	35.5		24
Y16711-12-08RW	1.1/16"X12	13	08	39		27
Y16711-12-10RW	1.1/16"X12	16	10	40		27
Y16711-12-12RW	1.1/16"X12	19	12	40		27
Y16711-12-16RW	1.1/16"X12	25	16	41		30
Y16711-14-10RW	1.3/16"X12	16	10	40		32
Y16711-14-12RW	1.3/16"X12	19	12	40.5		32
Y16711-16-12RW	1.5/16"X12	19	12	42.5		36
Y16711-16-16RW	1.5/16"X12	25	16	43.5		36
Y16711-20-16RW	1.5/8"X12	25	16	46		46
Y16711-20-20RW	1.5/8"X12	32	20	47.5		46
Y16711-24-20RW	1.7/8"X12	32	20	53.5		50
Y16711-24-24RW	1.7/8"X12	38	24	53		50
Y16711-32-32RW	2.1/2"X12	51	32	64		65

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为Y16712-XX-XXRW Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is Y16712-XX-XXRW.


Y26711-RW

美制JIC外螺纹74°内锥面
JIC Female 74° Cone Seat ISO 12151-5 -SAE J514

代号 PART NO.	螺纹T THREAD T	软管 HOSE BORE		尺寸 DIMENSIONS		
		公称内径DN	标号 DASH	L	H	S1
Y26711-04-04RW	7/16"X20	6	04	15		14
Y26711-05-05RW	1/2"X20	8	05	15.5		17
Y26711-06-05RW	9/16"X18	8	05	15.5		19
Y26711-06-06RW	9/16"X18	10	06	15.5		19
Y26711-06-08RW	9/16"X18	13	08	16		19
Y26711-08-06RW	3/4"X16	10	06	17.5		22
Y26711-08-08RW	3/4"X16	13	08	18		22
Y26711-10-08RW	7/8"X14	13	08	18.5		27
Y26711-10-10RW	7/8"X14	16	10	20		27
Y26711-10-12RW	7/8"X14	19	12	20		27
Y26711-12-10RW	1.1/16"X12	16	10	21.5		32
Y26711-12-12RW	1.1/16"X12	19	12	21.5		32
Y26711-14-12RW	1.3/16"X12	19	12	21.5		36
Y26711-16-16RW	1.5/16"X12	25	16	23		41
Y26711-20-20RW	1.5/8"X12	32	20	26		50
Y26711-24-24RW	1.7/8"X12	38	24	26.5		60
Y26711-32-32RW	2.1/2"X12	51	32	27		75

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为Y26712-XX-XXRW Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is Y26712-XX-XXRW.


Y26741-RW

45°美制JIC内螺纹74°内锥面
45°JIC Female 74° Cone Seat ISO 12151-5 -SAE J514

代号 PART NO.	螺纹T THREAD T	软管 HOSE BORE		尺寸 DIMENSIONS		
		公称内径DN	标号 DASH	L	H	S1
Y26741-04-04RW	7/16"X20	6	04	33.8	10	14
Y26741-05-05RW	1/2"X20	8	05	33.7	10	17
Y26741-06-05RW	9/16"X18	8	05	34.7	11	19
Y26741-06-06RW	9/16"X18	10	06	37	11	19
Y26741-06-08RW	9/16"X18	12	08	46.3	15	19
Y26741-08-06RW	3/4"X16	10	06	41	15	22
Y26741-08-08RW	3/4"X16	13	08	46.3	15	22
Y26741-10-08RW	7/8"X14	13	08	47.3	16	27
Y26741-10-10RW	7/8"X14	16	10	55.2	16	27
Y26741-10-12RW	7/8"X14	20	12	63.7	21	27
Y26741-12-10RW	1.1/16"X12	16	10	60.2	21	32
Y26741-12-12RW	1.1/16"X12	19	12	63.7	21	32
Y26741-14-12RW	1.3/16"X12	19	12	73.5	31	36
Y26741-16-16RW	1.5/16"X12	25	16	73.4	24	41
Y26741-20-20RW	1.5/8"X12	32	20	92.8	32	50
Y26741-24-24RW	1.7/8"X12	38	24	113.1	42	60
Y26741-32-32RW	2.1/2"X12	51	32	136.5	51.5	75

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为Y26742-XX-XXRW Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is Y26742-XX-XXRW.



Y26791-RW

 90°美制JIC内螺纹74°内锥面
90° JIC Female 74° Cone Seat ISO 12151-5 -SAE J514


代号 PART NO.	螺纹T THREAD T	软管 HOSE BORE		尺寸 DIMENSIONS		
		公称内径DN	标号 DASH	L	H	S1
Y26791-04-04RW	7/16"X20	6	04	32	32	14
Y26791-05-05RW	1/2"X20	8	05	32.5	32	17
Y26791-06-05RW	9/16"X18	8	05	32.5	38	19
Y26791-06-06RW	9/16"X18	10	06	36.5	38	19
Y26791-06-08RW	9/16"X18	13	08	44.5	41	19
Y26791-08-06RW	3/4"X16	10	06	36.5	41	22
Y26791-08-08RW	3/4"X16	13	08	44.5	41	22
Y26791-10-08RW	7/8"X14	13	08	44.5	47	27
Y26791-10-10RW	7/8"X14	16	10	55	47	27
Y26791-10-12RW	7/8"X14	19	12	62	58	27
Y26791-12-10RW	1.1/16"X12	16	10	55	58	32
Y26791-12-12RW	1.1/16"X12	19	12	62	58	32
Y26791-14-12RW	1.3/16"X12	19	12	64	63.5	36
Y26791-16-16RW	1.5/16"X12	25	16	74	71	41
Y26791-20-20RW	1.5/8"X12	32	20	91.5	78	50
Y26791-24-24RW	1.7/8"X12	38	24	108	86	60
Y26791-32-32RW	2.1/2"X12	51	32	133.8	140	75

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为Y26792-XX-XXRW。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is Y26792-XX-XXRW.


 Y24211-RW
Y24211-TRW

 美制ORFS内螺纹平面
ORFS e female Seal ISO 12151-1- SAE J516


代号 PART NO.	螺纹T THREAD T	软管 HOSE BORE		尺寸 DIMENSIONS	
		公称内径DN	标号 DASH	L	S1
Y24211-04-04RW	9/16" X18	6	04	22.5	17
Y24211-04-05RW	9/16" X18	8	05	22.5	17
Y24211-04-06RW	9/16" X18	10	06	22.5	17
Y24211-06-04TRW	11/16" X16	6	04	23.5	22
Y24211-06-05TRW	11/16" X16	8	05	23.5	22
Y24211-06-06RW	11/16" X16	10	06	25.5	22
Y24211-08-06RW	11/16" X16	13	08	26	22
Y24211-08-08TRW	13/16" X16	8	05	25	27
Y24211-08-06TRW	13/16" X16	10	06	25	24
Y24211-08-08RW	13/16" X16	13	08	28	24
Y24211-08-10RW	13/16" X16	16	10	29	24
Y24211-10-08TRW	1" X14	13	08	29.5	30
Y24211-10-10RW	1" X14	16	10	33	30
Y24211-10-12RW	1" X14	19	12	33.5	30
Y24211-12-08TRW	1.3/16" X12	13	08	30.5	36
Y24211-12-10TRW	1.3/16" X12	16	10	31.5	36
Y24211-12-12RW	1.3/16" X12	19	12	35	36
Y24211-12-16RW	1.3/16" X12	25	16	36	36
Y24211-16-12TRW	1.7/16" X12	19	12	35	41
Y24211-16-14TRW	1.7/16" X12	22	14	35	41
Y24211-16-16TRW	1.7/16" X12	25	16	35	41
Y24211-16-20RW	1.7/16" X12	32	20	39.5	41
Y24211-20-16TRW	1.11/16" X12	25	16	35	50
Y24211-24-20TRW	2" X12	32	20	36	60
Y24211-24-24TRW	2" X12	38	24	36	60


注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为Y24212-XX-XXTRW。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is Y24212-XX-XXTRW.

Y14211-RW

 美制ORFS外螺纹平面O型圈密封
ORFS Male O-Ring Seal ISO 12151-1 -SAE J1453



代号 PART NO.	螺纹T THREAD T	软管 HOSE BORE		尺寸 DIMENSIONS		
		公称内径DN	标号 DASH	L		S1
Y14211-04-04RW	9/16" X18	6	04	22.5		17
Y14211-06-04RW	11/16" X16	6	04	24		19
Y14211-06-06RW	11/16" X16	10	06	24		19
Y14211-08-06RW	13/16" X16	10	06	27.5		22
Y14211-08-08RW	13/16" X16	13	08	28.5		22
Y14211-08-10RW	13/16" X16	16	10	28.5		22
Y14211-10-08RW	1" X14	13	08	32.5		27
Y14211-10-10RW	1" X14	16	10	33.5		27
Y14211-12-08RW	1.3/16" X12	13	08	35.5		32
Y14211-12-10RW	1.3/16" X12	16	10	36		32
Y14211-12-12RW	1.3/16" X12	19	12	36.5		32
Y14211-16-12RW	1.7/16" X12	19	12	37		41
Y14211-16-16RW	1.7/16" X12	25	16	38.5		41
Y14211-20-20RW	1.11/16" X12	32	20	41.5		46
Y14211-24-24RW	2" X12	38	24	43		55

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为Y14211-XX-XXRW。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is Y14211-XX-XXRW.

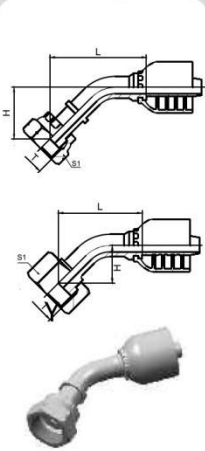Y24241-RW
Y24241-TRW45°弯美制ORFS内螺纹平面
45°Elbow ORFS Female Seal ISO 12151-1- SAE J516


代号 PART NO.	螺纹T THREAD T	软管 HOSE BORE		尺寸 DIMENSIONS		
		公称内径DN	标号 DASH	L	H	S1
Y24211-04-04RW	9/16"X18	6	04	33.8	10	17
Y24241-04-05RW	9/16"X18	8	05	33.7	10	17
Y24241-04-06RW	9/16"X18	10	06	37	11	17
Y24241-06-04TRW	11/16"X16	6	04	34.8	11	22
Y24241-06-05TRW	11/16"X16	8	05	34.7	11	22
Y24241-06-06RW	11/16"X16	10	06	37	11	22
Y24241-08-06TRW	13/16"X16	10	06	41	15	24
Y24241-08-08RW	13/16"X16	13	08	46.3	15	24
Y24241-08-10RW	13/16"X16	16	10	55.2	16	24
Y24241-10-08TRW	1"X14	13	08	47.3	16	30
Y24241-10-10RW	1"X14	10	10	55.2	16	30
Y24241-12-08TRW	1.3/16"X12	13	08	52.3	21	36
Y24241-12-10TRW	1.3/16"X12	16	10	60.2	21	36
Y24241-12-12RW	1.3/16"X12	19	12	63.7	21	36
Y24241-12-16RW	1.3/16"X12	25	16	73.4	24	36
Y24241-16-12TRW	1.7/16"X12	19	12	66.7	24	41
Y24241-16-14TRW	1.7/16"X12	22	14	66.7	24	41
Y24241-16-16TRW	1.7/16"X12	25	16	73.4	24	41
Y24241-20-16TRW	1.11/16"X12	25	16	81.4	32	50
Y24241-24-20TRW	2"X12	32	20	102.8	42	60
Y24241-24-24TRW	2"X12	38	24	113.1	42	60

Y87311-RW

SAE 法兰 3000 PSI
SAE Flange 3000PSI ISO 12151-3 - SAE J518

代号 PART NO.	法兰型号 FLANGE SIZE	软管 HOSE BORE		尺寸 DIMENSIONS		
		公称内径DN	标号 DASH	L	D	L1
Y87311-08-08RW	1/2"	13	08	46	30.2	6.73
Y87311-12-08RW	3/4"	13	08	47	38.1	6.73
Y87311-12-10RW	3/4"	16	10	48	38.1	6.73
Y87311-12-12RW	3/4"	19	12	48	38.1	6.73
Y87311-12-16RW	3/4"	25	16	49	38.1	6.73
Y87311-16-12RW	1"	19	12	51	44.4	8
Y87311-16-16RW	1"	25	16	52	44.4	8
Y87311-16-20RW	1"	32	20	53	44.4	8
Y87311-20-16RW	1.1/4"	25	16	57	50.8	8
Y87311-20-20RW	1.1/4"	32	20	58	50.8	8
Y87311-24-20RW	1.1/2"	32	20	68	60.3	8
Y87311-24-24RW	1.1/2"	38	24	68	60.3	8
Y87311-32-24RW	2"	38	24	66	71.4	9.53
Y87311-32-32RW	2"	51	32	66	71.4	9.53


注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为Y87312-XX-XXRW。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is Y87312-XX-XXRW.

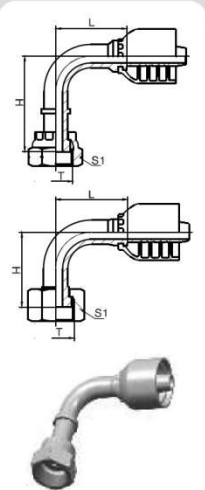Y24291-RW
Y24291-TRW90°弯美制ORFS内螺纹平面
90°Elbow ORFS Female Seal ISO 12151-1- SAE J516

代号 PART NO.	螺纹T THREAD T	软管 HOSE BORE		尺寸 DIMENSIONS		
		公称内径DN	标号 DASH	L	H	S1
Y24291-04-04RW	9/16" X18	6	04	30	41	19
Y24291-04-05RW	9/16" X18	8	05	33	44	19
Y24291-06-05TRW	11/16" X16	8	05	33	37.5	22
Y24291-06-06RW	11/16" X16	10	06	35.3	49.3	22
Y24291-06-08RW	11/16" X16	13	08	41	55	22
Y24291-08-06TRW	13/16" X16	10	06	35.3	39.8	27
Y24291-08-08RW	13/16" X16	13	08	41	57.5	27
Y24291-08-10RW	13/16" X16	16	10	56.5	61.5	27
Y24291-10-08TRW	1" X14	13	08	41	46	30
Y24291-10-10RW	1" X14	16	10	56	66	30
Y24291-10-12TRW	1" X14	13	12	65.5	75.5	30
Y24291-12-10TRW	1.3/16" X12	16	10	59	51.5	36
Y24291-12-12RW	1.3/16" X12	19	12	65.5	77	36
Y24291-12-16RW	1.3/16" X12	25	16	76.7	83.5	36
Y24291-16-12TRW	1.7/16" X12	19	12	65.5	63	41
Y24291-16-14TRW	1.7/16" X12	22	14	71.2	63	41
Y24291-16-16TRW	1.7/16" X12	25	16	76.9	67.5	41
Y24291-20-16TRW	1.11/16" X12	25	16	76.7	67.5	50
Y24291-24-20TRW	2" X12	32	20	91.5	78.5	50
Y24291-24-24TRW	2" X12	38	24	109.4	92	60

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为Y24292-XX-XXRW。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is Y24292-XX-XXRW.


Y87341-RW

45°弯 SAE 法兰 3000 PSI
45° SAE Flange 3000PSI ISO 12151-3 - SAE J518

代号 PART NO.	法兰型号 FLANGE SIZE	软管 HOSE BORE		尺寸 DIMENSIONS			
		公称内径DN	标号 DASH	L	H	D	L1
Y87341-08-08RW	1/2"	13	08	50.3	19	30.2	6.73
Y87341-12-08RW	3/4"	13	08	57.3	26	38.1	6.73
Y87341-12-10RW	3/4"	16	10	65.2	26	38.1	6.73
Y87341-12-12RW	3/4"	19	12	68.7	26	38.1	6.73
Y87341-12-16RW	3/4"	25	16	79.4	30	38.1	6.73
Y87341-16-12RW	1"	19	12	74.7	32	44.4	8
Y87341-16-16RW	1"	25	16	81.4	32	44.4	8
Y87341-16-20RW	1"	32	20	95.8	35	44.4	8
Y87341-20-16RW	1.1/4"	25	16	87.4	38	50.8	8
Y87341-20-20RW	1.1/4"	32	20	98.8	38	50.8	8
Y87341-24-20RW	1.1/2"	32	20	104.75	44	60.3	8
Y87341-24-24RW	1.1/2"	38	24	115.1	44	60.3	8
Y87341-32-24RW	2"	38	24	127.1	56	71.4	9.53
Y87341-32-32RW	2"	51	32	141	56	71.4	9.53

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为Y87342-XX-XXRW。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is Y87342-XX-XXRW.


Y87391-RW

 90°弯 SAE ? 3000 PSI
90° SAE Flange 3000PSI ISO 12151-3 -SAE J518


代号 PART NO.	法兰型号 FLANGE SIZE	软管 HOSE BORE		尺寸 D DIMENSIONS			
		公称内径DN	标号 DASH	L	H	D	L1
Y87391-08-08RW	1/2"	13	08	44.5	40	30.2	6.73
Y87391-12-08RW	3/4"	13	08	44.5	58	38.1	6.73
Y87391-12-10RW	3/4"	16	10	55	58	38.1	6.73
Y87391-12-12RW	3/4"	19	12	62	58	38.1	6.73
Y87391-12-16RW	3/4"	25	16	74	68	38.1	6.73
Y87391-16-12RW	1"	19	12	62	70	44.4	8
Y87391-16-16RW	1"	25	16	74	70	44.4	8
Y87391-16-20RW	1"	32	20	91.5	82	44.4	8
Y87391-20-16RW	1.1/4"	25	16	74	90	50.8	8
Y87391-20-20RW	1.1/4"	32	20	91.5	90	50.8	8
Y87391-24-20RW	1.1/2"	32	20	91.5	104	60.3	8
Y87391-24-24RW	1.1/2"	38	24	108	104	60.3	8
Y87391-32-24RW	2"	38	24	108	138	71.4	9.53
Y87391-32-32RW	2"	51	32	133.8	138	71.4	9.53

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为Y87392-XX-XXRW。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is Y87392-XX-XXRW.


Y87641-RW

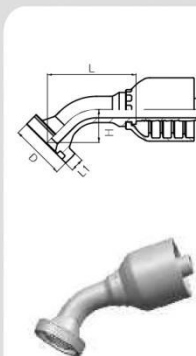 45°弯 SAE ? 6000 PSI
45° SAE Flange 6000PSI ISO 12151-3 -SAE J518


代号 PART NO.	法兰型号 FLANGE SIZE	软管 HOSE BORE		尺寸 DIMENSIONS			
		公称内径DN	标号 DASH	L	H	D	L1
Y87641-08-08RW	1/2"	13	08	50	31.9	31.7	7.75
Y87641-12-10RW	3/4"	16	10	65	22.6	41.3	8.76
Y87641-12-12RW	3/4"	19	12	68	72.6	41.3	8.76
Y87641-16-12RW	1"	19	12	74	73.2	47.6	9.53
Y87641-16-16RW	1"	25	16	81	43.2	47.6	9.53
Y87641-16-20RW	1"	32	20	95	83.5	47.6	9.53
Y87641-20-16RW	1.1/4"	25	16	87	43.8	47.6	9.53
Y87641-20-20RW	1.1/4"	32	20	98	83.8	54	10.29
Y87641-20-24RW	1.1/4"	32	20	115	41.4	54	10.29
Y87641-24-24RW	1.1/2"	38	24	127	51.6	63.5	12.57
Y87641-32-24RW	2"	38	24	141	56	79.4	12.57
Y87641-32-32RW	2"	51	32	179	56	79.4	12.57

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为Y87642-XX-XXRW。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is Y87642-XX-XXRW.


Y87611-RW

 SAE ? 6000 PSI
SAE Flange 6000PSI ISO 12151-3 -SAE J518


代号 PART NO.	法兰型号 FLANGE SIZE	软管 HOSE BORE		尺寸 DIMENSIONS		
		公称内径DN	标号 DASH	L	D	L1
Y87611-08-08RW	1/2"	13	08	47	31.7	7.75
Y87611-12-10RW	3/4"	16	10	51	41.3	8.76
Y87611-12-12RW	3/4"	19	12	51	41.3	8.76
Y87611-16-12RW	1"	19	12	56	47.6	9.53
Y87611-16-16RW	1"	25	16	57	47.6	9.53
Y87611-16-20RW	1"	32	20	58	47.6	9.53
Y87611-20-16RW	1.1/4"	25	16	65	54	10.29
Y87611-20-20RW	1.1/4"	32	20	66	54	10.29
Y87611-24-20RW	1.1/2"	32	20	75	63.5	12.57
Y87611-24-24RW	1.1/2"	38	24	75	63.5	12.57
Y87611-32-24RW	2"	38	24	85	79.4	12.57
Y87611-32-32RW	2"	51	32	85	79.4	12.57

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为Y87612-XX-XXRW。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is Y87612-XX-XXRW.

Y87691-RW

 90°弯 SAE ? 6000 PSI
90° SAE Flange 6000PSI ISO 12151-3 -SAE J518



代号 PART NO.	法兰型号 FLANGE SIZE	软管 HOSE BORE		尺寸 DIMENSIONS			
		公称内径DN	标号 DASH	L	H	D	L1
Y87691-08-08RW	1/2"	13	08	44.5	40	31.7	7.75
Y87691-12-10RW	3/4"	16	10	55	58	41.3	8.76
Y87691-12-12RW	3/4"	19	12	62	58	41.3	8.76
Y87691-16-12RW	1"	19	12	62	70	47.6	9.53
Y87691-16-16RW	1"	25	16	74	70	47.6	9.53
Y87691-16-20RW	1"	32	20	91.5	82	47.6	9.53
Y87691-20-16RW	1.1/4"	25	16	74	90	54	10.29
Y87691-20-20RW	1.1/4"	32	20	91.5	90	54	10.29
Y87691-24-20RW	1.1/2"	32	20	91.5	104	63.5	12.57
Y87691-24-24RW	1.1/2"	38	24	108	104	63.5	12.57
Y87691-32-24RW	2"	38	24	108	138	79.4	12.57
Y87691-32-32RW	2"	51	32	133.8	138	79.4	12.57

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为Y87692-XX-XXRW。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is Y87692-XX-XXRW.

Y10411

公制外螺纹24°内锥面轻系列

Metric Male 24° Cone Sest L.T.ISO 12151-2 -DIN3861




代号 PART NO.	螺纹T THREAD T	软管 HOSE BORE		管子外径 TUBE O.D	尺寸 DIMENSIONS		
		公称内径DN	标号 DASH		L	D	S1
Y10411-12-04	M12X1.5	6	04	6	20.5	6	14
Y10411-14-04	M14X1.5	6	04	8	20.5	8	17
Y10411-14-05	M14X1.5	8	05	8	21.5	8	17
Y10411-16-04	M16X1.5	6	04	10	22.5	10	17
Y10411-16-05	M16X1.5	8	05	10	22.5	10	17
Y10411-16-06	M16X1.5	10	06	10	23.5	10	17
Y10411-18-05	M18X1.5	8	05	12	23.5	12	19
Y10411-18-06	M18X1.5	10	06	12	23.5	12	19
Y10411-22-06	M22X1.5	10	06	15	24.5	15	24
Y10411-22-08	M22X1.5	13	08	15	25	15	24
Y10411-26-08	M26X1.5	13	08	18	26.5	18	27
Y10411-26-10	M26X1.5	16	10	18	27	18	27
Y10411-30-10	M30X2	16	10	22	30	22	32
Y10411-30-12	M30X2	19	12	22	30	22	32
Y10411-36-16	M36X2	25	16	28	33	28	41
Y10411-45-20	M45X2	32	20	35	38	35	46
Y10411-52-24	M52X2	38	24	42	38.5	42	55

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为Y10412-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is Y10412-XX-XX.


Y20411-W

公制外螺纹24°锥带O型轻系列

Metric Female 24° Cone O-Ring L.T. ISO 12151-2-DIN3865



Y20411-T



代号 PART NO.	螺纹T THREAD T	软管 HOSE BORE		管子外径 TUBE O.D	尺寸 DIMENSIONS		
		公称内径DN	标号 DASH		L	H	S1
Y20411-12-04W	M12X1.5	6	04	6	39.8	16	14
Y20411-14-04T	M14X1.5	6	04	8	39.8	16	17
Y20411-14-05W	M14X1.5	8	05	8	40.7	17	17
Y20411-14-06W	M14X1.5	10	06	8	44.5	18.5	17
Y20411-16-04T	M16X1.5	6	04	10	40.8	17	19
Y20411-16-05T	M16X1.5	8	05	10	40.7	17	19
Y20411-16-06W	M16X1.5	10	06	10	44.5	18.5	19
Y20411-18-05T	M18X1.5	8	05	12	42.2	18.5	22
Y20411-18-06T	M18X1.5	10	06	12	44.5	18.5	22
Y20411-18-08W	M18X1.5	13	08	12	50.8	19.5	22
Y20411-22-08T	M22X1.5	13	08	15	50.8	19.5	27
Y20411-22-10W	M22X1.5	16	10	15	62.7	23.5	27
Y20411-26-10T	M26X1.5	16	10	18	62.7	23.5	32
Y20411-26-12W	M26X1.5	19	12	18	68.2	25.5	32
Y20411-30-10T	M30X2	16	10	22	64.7	25.5	36
Y20411-30-12T	M30X2	19	12	22	68.2	25.5	36
Y20411-30-16W	M30X2	25	16	22	81.4	32	36
Y20411-36-12T	M36X2	19	12	28	74.7	32	41
Y20411-36-14T	M36X2	22	14	28	79.5	34	41
Y20411-36-16T	M36X2	25	16	28	81.4	32	41
Y20411-36-20W	M36X2	32	20	28	98.8	38	41
Y20411-45-16T	M45X2	25	16	35	87.4	38	50
Y20411-45-20T	M45X2	32	20	35	98.8	38	50
Y20411-45-24W	M45X2	38	24	35	115.6	44.5	50
Y20411-52-20T	M52X2	32	20	42	105.3	44.5	60
Y20411-52-24T	M52X2	38	24	42	115.6	44.5	60
Y20411-52-32W	M52X2	51	32	42	137.6	57.6	60


注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为Y20412-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is Y20412-XX-XX.




Y20441-W

45°弯公制内螺纹24°锥带O型轻系列

45 Metric Female 24° Cone O-Ring L.T.ISO 12151-2-DIN3865



Y20441-T




代号 PART NO.	螺纹 T THREAD T	软管 HOSE BORE		管子外径 TUBE O.D	尺寸 DIMENSIONS		
		公称内径 DN	标号 DASH		L	H	S1
Y20441-12-04W	M12X1.5	6	04	6	47	25	14
Y20441-14-04T	M14X1.5	6	04	8	39	17	17
Y20441-14-05W	M14X1.5	8	05	8	42.5	19	17
Y20441-14-06W	M14X1.5	10	06	8	45	19	17
Y20441-16-04T	M16X1.5	6	04	10	39	19	19
Y20441-16-05T	M16X1.5	8	05	10	45	21.5	19
Y20441-16-06W	M16X1.5	10	06	10	54.6	28.6	19
Y20441-18-05T	M18X1.5	8	05	12	46	22	22
Y20441-18-06T	M18X1.5	10	06	12	48	22.2	22
Y20441-18-08W	M18X1.5	13	08	12	54	21.5	22
Y20441-22-08T	M22X1.5	13	08	15	57	25	27
Y20441-22-10W	M22X1.5	16	10	15	73	33.7	27
Y20441-26-10T	M26X1.5	16	10	18	68.5	29	32
Y20441-26-12W	M26X1.5	19	12	18	81	38.5	32
Y20441-30-10T	M30X2	16	10	22	68	28.5	36
Y20441-30-12T	M30X2	19	12	22	74	31.5	36
Y20441-30-16W	M30X2	25	16	22	89.5	36.5	36
Y20441-36-12T	M36X2	19	12	28	76.5	33.7	41
Y20441-36-14T	M36X2	22	14	28	79.5	34	41
Y20441-36-16T	M36X2	25	16	28	88	35	41
Y20441-36-20W	M36X2	32	20	28	102	41.5	41
Y20441-45-16T	M45X2	25	16	35	88	35	50
Y20441-45-20T	M45X2	32	20	35	99.8	39.1	50
Y20441-45-24W	M45X2	38	24	35	113.5	44.5	50
Y20441-52-20T	M52X2	32	20	42	100	39.1	60
Y20441-52-24T	M52X2	38	24	42	115	45.3	60
Y20441-52-32W	M52X2	51	32	42	132.5	51.5	60

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为Y20442-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is Y20442-XX-XX.


Y20491-W

90°弯公制外螺纹24°锥带O型轻系列

90°Metric Female 24° Cone O-Ring L.T.ISO 12151-2-DIN3865



Y20491-T




代号 PART NO.	螺纹 T THREAD T	软管 HOSE BORE		管子外径 TUBE O.D	尺寸 DIMENSIONS		
		公称内径 DN	标号 DASH		L	H	S1
Y20491-12-04W	M12X1.5	6	04	6	32	30.5	14
Y20491-14-04T	M14X1.5	6	04	8	32	30.5	17
Y20491-14-05W	M14X1.5	8	05	8	32.5	33	17
Y20491-14-06W	M14X1.5	10	06	8	36.5	36	17
Y20491-16-04T	M16X1.5	6	04	10	32	33	19
Y20491-16-05T	M16X1.5	8	05	10	32.5	33	19
Y20491-16-06W	M16X1.5	10	06	10	36.5	36	19
Y20491-18-05T	M18X1.5	8	05	12	32.5	36	22
Y20491-18-06T	M18X1.5	10	06	12	36.5	36	22
Y20491-18-08W	M18X1.5	13	08	12	44.5	40.5	22
Y20491-22-08T	M22X1.5	13	08	15	44.5	40.5	27
Y20491-22-10W	M22X1.5	16	10	15	55	51.5	27
Y20491-26-10T	M26X1.5	16	10	18	55	51.5	32
Y20491-26-12W	M26X1.5	19	12	18	62	56	32
Y20491-30-10T	M30X2	16	10	22	55	56	36
Y20491-30-12T	M30X2	19	12	22	62	56	36
Y20491-30-16W	M30X2	25	16	22	74	68.5	36
Y20491-36-12T	M36X2	19	12	28	62	68.5	41
Y20491-36-16T	M36X2	25	16	28	74	68.5	41
Y20491-36-20W	M36X2	32	20	28	91.5	78.5	41
Y20491-45-16T	M45X2	25	16	35	74	78.5	50
Y20491-45-20T	M45X2	32	20	35	91.5	78.5	50
Y20491-45-24W	M45X2	38	24	35	108	95	50
Y20491-52-20T	M52X2	32	20	42	91.5	78.5	60
Y20491-52-24T	M52X2	38	24	42	108	95	60
Y20491-52-32W	M52X2	51	32	42	133.8	130.5	60

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为Y20492-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is Y20492-XX-XX.



Y10511

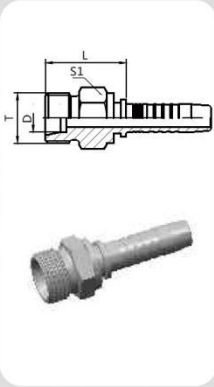


公制外螺纹24°内锥面重系列
Metric Mael 24° Cone H.T. ISO 84341-2-DIN3861


代号 PART NO.	螺纹T THREAD T	软管 HOSE BORE		管子外径 尺寸 DIMENSIONS			
		公称内径DN	标号 DASH	TUBE O.D	L	D	S1
Y10511-14-04	M14X1.5	6	04	6	24	6	14
Y10511-16-04	M16X1.5	6	04	8	26.5	8	17
Y10511-18-04	M18X1.5	6	04	10	26.5	10	19
Y10511-18-06	M18X1.5	10	06	10	27	10	19
Y10511-20-05	M20X1.5	8	05	12	28	12	22
Y10511-20-06	M20X1.5	10	06	12	28	12	22
Y10511-22-06	M22X1.5	10	06	14	28.5	14	24
Y10511-24-08	M24X1.5	13	08	16	32	16	27
Y10511-30-10	M30X2	16	10	20	36	20	32
Y10511-30-12	M30X2	19	12	20	36	20	32
Y10511-36-12	M36X2	19	12	25	40	25	41
Y10511-36-16	M36X2	25	16	25	41	25	41
Y10511-42-16	M42X2	25	16	30	43	30	46
Y10511-52-20	M52X2	32	20	38	48	38	55

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为Y10512-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is Y10512-XX-XX.

Y20541-W



Y20541-T



45°公制内螺纹24°锥带O型圈重系列
45 Metric Female 24° Cone O-Ring H.T. ISO 12151-2-DIN3865


代号 PART NO.	螺纹T THREAD T	软管 HOSE BORE		管子外径 尺寸 DIMENSIONS			
		公称内径DN	标号 DASH	TUBE O.D	L	H	S1
Y20541-14-04T	M14X1.5	6	04	6	40.8	17	17
Y20541-16-04T	M16X1.5	6	04	8	40.8	17	19
Y20541-16-05T	M16X1.5	8	05	8	41.7	18	19
Y20541-18-04T	M18X1.5	6	04	10	40.8	17	22
Y20541-18-05T	M18X1.5	8	05	10	41.7	18	22
Y20541-18-06T	M18X1.5	10	06	10	44.5	18.5	22
Y20541-20-06T	M20X1.5	10	06	12	44.5	18.5	24
Y20541-20-08W	M20X1.5	13	08	12	52.3	21	24
Y20541-22-06T	M22X1.5	10	06	14	48.9	22.9	27
Y20541-24-06T	M24X1.5	10	06	16	44.5	18.5	30
Y20541-24-08T	M24X1.5	13	08	16	52.3	21	30
Y20541-30-10T	M30X2	16	10	20	64.2	25	36
Y20541-30-12T	M30X2	19	12	20	73.2	30.5	36
Y20541-36-12T	M36X2	19	12	25	73.2	30.5	46
Y20541-36-16T	M36X2	25	16	25	84.9	35.5	46
Y20541-42-12T	M42X2	19	12	30	78.2	35.5	50
Y20541-42-16T	M42X2	25	16	30	84.9	35.5	50
Y20541-42-20W	M42X2	32	20	30	102.75	42	50
Y20541-52-20T	M52X2	32	20	38	102.75	42	60
Y20541-52-24T	M52X2	38	24	38	115.7	44.6	60

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为Y20542-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is Y20542-XX-XX.

Y20511-W



Y20511-T




公制内螺纹24°锥带O型圈重系列
Metric Female 24° Cone O-Ring H.T. ISO 12151-2-DIN3865

代号 PART NO.	螺纹T THREAD T	软管 HOSE BORE		管子外径 尺寸 DIMENSIONS			
		公称内径DN	标号 DASH	TUBE O.D	L		S1
Y20511-14-04T	M14X1.5	6	04	6	23.5		17
Y20511-16-04T	M16X1.5	6	04	8	24		19
Y20511-16-05T	M16X1.5	8	05	8	24		19
Y20511-18-04T	M18X1.5	6	04	10	25		22
Y20511-18-05T	M18X1.5	8	05	10	25		22
Y20511-18-06T	M18X1.5	10	06	10	25		22
Y20511-20-06T	M20X1.5	10	06	12	28.5		24
Y20511-20-08W	M20X1.5	13	08	12	29		24
Y20511-22-06T	M22X1.5	10	06	14	25.5		27
Y20511-24-06T	M24X1.5	10	06	16	29.5		30
Y20511-24-08T	M24X1.5	13	08	16	30		30
Y20511-30-10T	M30X2	16	10	20	34		36
Y20511-30-12T	M30X2	19	12	20	35		36
Y20511-36-12T	M36X2	19	12	25	32		46
Y20511-36-16T	M36X2	25	16	25	35.5		46
Y20511-42-12T	M42X2	19	12	30	35		50
Y20511-42-16T	M42X2	25	16	30	36		50
Y20511-42-20W	M42X2	32	20	30	34.5		50
Y20511-52-20T	M52X2	32	20	38	36		60
Y20511-52-24T	M52X2	38	24	38	36		60


注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为Y20512-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is Y20512-XX-XX.



Y20591-W



Y20591-T



90°公制内螺纹24°锥带O型圈重系列
90°Metric Female 24° Cone O-Ring H.T. ISO 12151-2-DIN3865


代号 PART NO.	螺纹 T THREAD T	软管 HOSE BORE		管子外径 TUBE O.D.	尺寸 DIMENSIONS		
		公称内径 DN	标号 DASH		L	H	S1
Y20591-14-04T	M14X1.5	6	04	6	32	32	17
Y20591-16-04T	M16X1.5	6	04	8	32	32	19
Y20591-16-05T	M16X1.5	8	05	8	32.5	34	19
Y20591-18-04T	M18X1.5	6	04	10	32	32	22
Y20591-18-05T	M18X1.5	8	05	10	32.5	34	22
Y20591-18-06T	M18X1.5	10	06	10	36.5	35.5	22
Y20591-20-06T	M20X1.5	10	06	12	36.5	35.5	24
Y20591-20-08W	M20X1.5	13	08	12	44.5	43	24
Y20591-22-06T	M22X1.5	10	06	14	36.5	43	27
Y20591-24-06T	M24X1.5	10	06	16	44.5	43	30
Y20591-24-08T	M24X1.5	13	08	16	44.5	43	30
Y20591-30-10T	M30X2	16	10	20	55	49.5	36
Y20591-30-12T	M30X2	19	12	20	62	59	36
Y20591-36-12T	M36X2	19	12	25	62	59	46
Y20591-36-16T	M36X2	25	16	25	74	70	46
Y20591-42-12T	M42X2	19	12	30	74	70	50
Y20591-42-16T	M42X2	25	16	30	74	70	50
Y20591-42-20W	M42X2	32	20	30	91.5	87	50
Y20591-52-20T	M52X2	32	20	38	91.5	87	60
Y20591-52-24T	M52X2	38	24	38	108	100	60

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为Y20592-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is Y20592-XX-XX.

Y20111



Y20111-T




公制内螺纹球面
Metric Female Multiseal


代号 PART NO.	螺纹 T THREAD T	软管 HOSE BORE		尺寸 DIMENSIONS		
		公称内径 DN	标号 DASH	L	H	S1
Y20111-12-04	M12X1.5	6	04	19.5		17
Y20111-12-05	M12X1.5	8	05	19.5		17
Y20111-14-04T	M14X1.5	6	04	19.5		17
Y20111-14-05	M14X1.5	8	05	19.5		19
Y20111-16-04T	M16X1.5	6	04	20		19
Y20111-16-05T	M16X1.5	8	05	20		19
Y20111-18-06T	M18X1.5	10	06	20.5		22
Y20111-18-08	M18X1.5	13	08	22		24
Y20111-22-08T	M22X1.5	13	08	22.8		27
Y20111-24-10	M24X1.5	16	10	25.5		30
Y20111-27-10T	M27X1.5	16	10	23.5		32
Y20111-30-12T	M30X1.5	19	12	24.5		36
Y20111-39-16T	M39X2	25	16	29.5		46
Y20111-45-20T	M45X2	32	20	31.5		55
Y20111-52-24T	M52X2	38	24	33		60

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为Y20112-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is Y20112-XX-XX.

Y20141



Y20141-T




45°弯 公制内螺纹球面
45 Metric Female Multiseal

代号 PART NO.	螺纹 T THREAD T	软管 HOSE BORE		尺寸 DIMENSIONS		
		公称内径 DN	标号 DASH	L	H	S1
Y20141-12-04	M12X1.5	6	04	39.5	16.5	17
Y20141-14-04T	M14X1.5	6	04	43	18.3	17
Y20141-14-05	M14X1.5	8	05	45.5	22.2	19
Y20141-16-04T	M16X1.5	6	04	42.5	21.4	19
Y20141-16-05T	M16X1.5	8	05	44.5	19.5	19
Y20141-16-06	M16X1.5	10	06	50	24	22
Y20141-18-06T	M18X1.5	10	06	50	24	22
Y20141-18-08	M18X1.5	13	08	58.5	28.8	24
Y20141-22-08T	M22X1.5	13	08	60	27.2	27
Y20141-24-10	M24X1.5	16	10	67	27	30
Y20141-27-10T	M27X1.5	16	10	69	29.6	32
Y20141-30-12T	M30X1.5	19	12	76.5	33.7	36
Y20141-39-16T	M39X2	25	16	86	33.6	46
Y20141-45-20T	M45X2	32	20	99	38.4	55
Y20141-52-24T	M52X2	38	24	114	44.6	60


注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为Y20142-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is Y20142-XX-XX.



Y20191




Y20191-T

90°弯 公制内螺纹球面
90°Metric Female Multiseal


代号 PART NO.	螺纹T THREAD T	软管 HOSE BORE		尺寸 DIMENSIONS		
		公称内径DN	标号 DASH	L	H	S1
Y20191-12-04	M12X1.5	6	04	30	32	17
Y20191-14-04T	M14X1.5	6	04	32	35.5	17
Y20191-14-05	M14X1.5	8	05	33	40.5	19
Y20191-16-04T	M16X1.5	6	04	32	34.5	19
Y20191-16-05T	M16X1.5	8	05	33	41	19
Y20191-16-06	M16X1.5	10	06	36.5	43	22
Y20191-18-06T	M18X1.5	10	06	36.5	44.5	22
Y20191-18-08	M18X1.5	13	08	43.5	50	24
Y20191-22-08T	M22X1.5	13	08	43.5	52	27
Y20191-24-10	M24X1.5	16	10	55	56.5	30
Y20191-27-10T	M27X1.5	16	10	55	54	32
Y20191-30-12T	M30X1.5	19	12	64	67	36
Y20191-39-16T	M39X2	25	16	74	72	46
Y20191-45-20T	M45X2	32	20	91.5	85	55
Y20191-52-24T	M52X2	38	24	109	100	60

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为Y20192-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is Y20192-XX-XX.

Y20241




Y20241-T

45°弯公制内螺纹平面
45°Metric Female Flat Seat
参考REF.GB/T 9065.3


代号 PART NO.	螺纹T THREAD T	软管 HOSE BORE		尺寸 DIMENSIONS		
		公称内径DN	标号 DASH	L	H	S1
Y20241-14-04T	M14X1.5	6	04	37	13.5	17
Y20241-14-05	M14X1.5	8	05	41	17.5	19
Y20241-16-05T	M16X1.5	8	05	42	18.5	19
Y20241-16-06	M16X1.5	10	06	45	19	22
Y20241-18-06T	M18X1.5	10	06	46	20	22
Y20241-22-08T	M22X1.5	13	08	53	21.5	27
Y20241-27-10T	M27X1.5	16	10	65	25.5	32
Y20241-30-12T	M30X1.5	19	12	70	27.5	36
Y20241-39-16T	M39X2	25	16	84	29.7	46
Y20241-45-20T	M45X2	32	20	94.5	34	55
Y20241-52-24T	M52X2	38	24	110	41	60
Y20241-60-28T	M60X2	45	28	118.5	43.6	70
Y20241-64-32T	M64X2	51	32	128	45.5	75

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为Y20242-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is Y20242-XX-XX.

Y20211




Y20211-T

公制内螺纹平面
Metric Female Flat Seat
参考REF.GB/T 9065.3


代号 PART NO.	螺纹T THREAD T	软管 HOSE BORE		尺寸 DIMENSIONS		
		公称内径DN	标号 DASH	L	H	S1
Y20211-14-04T	M14X1.5	6	04	15.5		17
Y20211-14-05	M14X1.5	8	05	15.5		19
Y20211-16-05T	M16X1.5	8	05	16.5		19
Y20211-16-06	M16X1.5	10	06	16.5		22
Y20211-18-06T	M18X1.5	10	06	17.5		22
Y20211-22-08T	M22X1.5	13	08	18.5		27
Y20211-27-10T	M27X1.5	16	10	22		32
Y20211-30-12T	M30X1.5	19	12	21		36
Y20211-36-12T	M36X2	19	12	21		41
Y20211-39-16T	M39X2	25	16	23.5		46
Y20211-45-20T	M45X2	32	20	24.5		55
Y20211-52-24T	M52X2	38	24	25		60
Y20211-60-28T	M60X2	45	28	26		70
Y20211-64-32T	M64X2	51	32	27		75

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为Y20212-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is Y20212-XX-XX.

Y20291



Y20291-T

90°弯公制内螺纹平面
90°Metric Female Flat Seat
参考REF.GB/T 9065.3

代号 PART NO.	螺纹T THREAD T	软管 HOSE BORE		尺寸 DIMENSIONS		
		公称内径DN	标号 DASH	L	H	S1
Y20291-14-04T	M14X1.5	6	04	32	28.5	17
Y20291-14-05	M14X1.5	8	05	33	33.5	19
Y20291-16-05T	M16X1.5	8	05	32.5	35	19
Y20291-16-06	M16X1.5	10	06	36.5	37	22
Y20291-18-06T	M18X1.5	10	06	36.5	39	22
Y20291-22-08T	M22X1.5	13	08	43.5	43.5	27
Y20291-27-10T	M27X1.5	16	10	55	52	32
Y20291-30-12T	M30X1.5	19	12	63	58	36
Y20291-39-16T	M39X2	25	16	74	68.5	46
Y20291-45-20T	M45X2	32	20	91.5	78.5	55
Y20291-52-24T	M52X2	38	24	109	92	60
Y20291-64-32T	M64X2	51	32	129	113.3	75

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为Y20292-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is Y20292-XX-XX.




Y20711

国标公制内螺纹74°内锥面
GB Metric Female 74° Cone Seat
参考REF.GB/T 9065.1



Y20711-T




代号 PART NO.	螺纹T THREAD T	软管 HOSE BORE		尺寸 DIMENSIONS		
		公称内径DN	标号 DASH	L	H	S1
Y20711-12-04	M12X1.5	6	04	14.5		17
Y20711-14-04T	M14X1.5	6	04	15.5		17
Y20711-14-05	M14X1.5	8	05	15.5		19
Y20711-14-06	M14X1.5	10	06	15.5		19
Y20711-16-04T	M16X1.5	6	04	16.5		19
Y20711-16-05T	M16X1.5	8	05	16.5		19
Y20711-16-06	M16X1.5	10	06	16.5		22
Y20711-18-05T	M18X1.5	8	05	18.5		22
Y20711-18-06T	M18X1.5	10	06	17.5		22
Y20711-20-06T	M20X1.5	10	06	16		24
Y20711-22-08T	M22X1.5	13	08	18.5		27
Y20711-27-08T	M27X1.5	13	08	20.5		32
Y20711-27-10T	M27X1.5	16	10	21.5		32
Y20711-30-10T	M30X1.5	16	10	21.5		36
Y20711-30-12T	M30X1.5	19	12	21.5		36
Y20711-33-12T	M33X2	19	12	22		41
Y20711-36-12T	M36X2	19	12	21		41
Y20711-36-14T	M36X2	22	14	21		41
Y20711-36-16T	M36X2	25	16	22		41
Y20711-39-16T	M39X2	25	16	23.5		46
Y20711-42-16T	M42X2	25	16	23.5		50
Y20711-45-20T	M45X2	32	20	25		55
Y20711-52-24T	M52X2	38	24	25		60


注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为Y20712-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is Y20712-XX-XX.

Y20741

45°国标公制内螺纹74°内锥面
45°GB Metric Female 74° Cone Seat
参考REF.GB/T 9065.1



Y20741-T




代号 PART NO.	螺纹T THREAD T	软管 HOSE BORE		尺寸 DIMENSIONS		
		公称内径DN	标号 DASH	L	H	S1
Y20741-12-04	M12X1.5	6	04	38	15	17
Y20741-14-04T	M14X1.5	6	04	39	16	17
Y20741-14-05	M14X1.5	8	05	43.5	19.5	19
Y20741-14-06	M14X1.5	10	06	46	20	19
Y20741-16-04T	M16X1.5	6	04	39	15.5	19
Y20741-16-05T	M16X1.5	8	05	42.5	19	19
Y20741-16-06	M16X1.5	10	06	46.5	20.5	22
Y20741-18-05T	M18X1.5	8	05	44.5	21	22
Y20741-18-06T	M18X1.5	10	06	47	23	22
Y20741-22-08T	M22X1.5	13	08	56.2	23.7	27
Y20741-27-08T	M27X1.5	13	08	55	22.5	32
Y20741-27-10T	M27X1.5	16	10	63.5	24	32
Y20741-30-10T	M30X1.5	16	10	67	27	36
Y20741-30-12T	M30X1.5	19	12	72.8	30.2	36
Y20741-33-12T	M33X2	19	12	72	29.5	41
Y20741-36-12T	M36X2	19	12	69.5	26.5	41
Y20741-36-14T	M36X2	22	14	74	28.4	41
Y20741-36-16T	M36X2	25	16	81	28	41
Y20741-39-16T	M39X2	25	16	82	29.4	46
Y20741-45-20T	M45X2	32	20	94.5	33.8	55
Y20741-52-24T	M52X2	38	24	108	39	60


注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为Y20742-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is Y20742-XX-XX.



Y20791



Y20791-T




90°国标公制内螺纹74°内锥面
90°GB Metric Female 74° Cone Seat
参考REF.GB/T 9065.1

代号 PART NO.	螺纹 T THREAD T	软管 HOSE BORE		尺寸 DIMENSIONS		
		公称内径DN	标号 DASH	L	H	S1
Y20791-12-04	M12X1.5	6	04	32	30	17
Y20791-14-04T	M14X1.5	6	04	30	30	17
Y20791-14-05	M14X1.5	8	05	33	37	19
Y20791-14-06	M14X1.5	10	06	36.5	38.5	19
Y20791-16-04T	M16X1.5	6	04	32	32.5	19
Y20791-16-05T	M16X1.5	8	05	33	36	19
Y20791-16-06	M16X1.5	10	06	36.5	39.5	22
Y20791-18-05T	M18X1.5	8	05	33	38.5	22
Y20791-18-06T	M18X1.5	10	06	36.5	40.5	22
Y20791-22-08T	M22X1.5	13	08	43.5	46.5	27
Y20791-27-08T	M27X1.5	13	08	43.5	48.5	32
Y20791-27-10T	M27X1.5	16	10	55	53	32
Y20791-30-10T	M30X1.5	16	10	55	54	36
Y20791-30-12T	M30X1.5	19	12	64	62	36
Y20791-33-12T	M33X2	19	12	64	61	41
Y20791-36-12T	M36X2	19	12	64	57	41
Y20791-36-14T	M36X2	22	14	68.5	63	41
Y20791-36-16T	M36X2	25	16	74	64	41
Y20791-39-16T	M39X2	25	16	74	66	46
Y20791-45-20T	M45X2	32	20	91.5	78.5	55
Y20791-52-24T	M52X2	38	24	109	92	60

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为Y20792-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is Y20792-XX-XX.

Y50011




卡套式直管
Metric Standpipe Straight

代号 PART NO.	管子外径 TUBE O.D	软管 HOSE BORE		尺寸 DIMENSIONS			备注 NOTE
		公称内径DN	标号 DASH	L	D	L1	
Y50011-06L-04	6	6	04	29.5	6	22	轻系列 (L)
Y50011-10L-05	10	8	05	31	10	23	
Y50011-10L-06	10	10	06	33.5	10	23	
Y50011-12L-06	12	10	06	32	12	25	
Y50011-12L-08	12	13	08	32.5	12	25	
Y50011-15-08	15	13	08	35.5	15	25	
Y50011-18-10	18	16	10	35	18	26	
Y50011-22-10	22	16	10	38	22	28	
Y50011-22-12	22	19	12	38	22	28	
Y50011-22-16	22	25	16	39	22	28	
Y50011-28-16	28	25	16	41	28	30	
Y50011-35-20	35	32	20	56	35	36	
Y50011-42-24	42	38	24	62	42	40	重系列 (S)
Y50011-08S-04	8	6	04	31	8	24	
Y50011-08S-05	8	8	05	31	8	24	
Y50011-08S-06	8	10	06	31	8	24	
Y50011-10S-04	10	6	04	35	10	23	
Y50011-12S-04	12	6	04	33	12	25	
Y50011-12S-05	12	8	05	33	12	25	
Y50011-14-05	14	8	05	39.5	14	29	
Y50011-14-06	14	10	06	39.5	14	29	
Y50011-14-08	14	13	08	40	14	29	
Y50011-16-08	16	13	08	41	16	30	
Y50011-16-10	16	16	10	42	16	30	
Y50011-20-10	20	16	10	52.5	20	36	
Y50011-20-12	20	19	12	52.5	20	36	
Y50011-25-12	25	19	12	56	25	40	
Y50011-25-16	25	25	16	57	25	40	
Y50011-30-16	30	25	16	63	30	44	
Y50011-30-20	30	32	20	64	30	44	
Y50011-38-16	38	25	16	69	38	50	
Y50011-38-20	38	32	20	70	38	50	

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为Y50012-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is Y50012-XX-XX.




Y50041

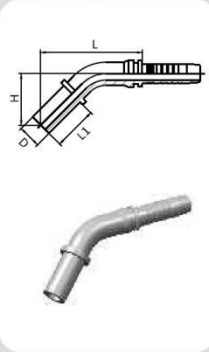45°弯公制卡套式直管
45°Metric Standpipe Straight

代号 PART NO.	管子外径 TUBE O.D		软管 HOSE BORE		尺寸 DIMENSIONS				备注 NOTE
	管子外径 TUBE O.D	公称内径DN	标号 DASH	L	H	D	L1		
Y50041-06L-04	6	6	04	52	30	6	22	轻系列 (L)	
Y50041-10L-05	10	8	05	54	30.5	10	23		
Y50041-10L-06	10	10	06	56	31	10	23		
Y50041-12L-06	12	10	06	58.5	34	12	25		
Y50041-12L-08	12	13	08	73	37	12	25		
Y50041-15-08	15	13	08	71	35.5	15	25		
Y50041-18-10	18	16	10	85	39.5	18	26		
Y50041-22-10	22	16	10	87	42	22	28		
Y50041-22-12	22	19	12	93.5	45.5	22	28		
Y50041-22-16	22	25	16	101	46.5	22	28		
Y50041-28-16	28	25	16	104	49.5	28	30		
Y50041-35-20	35	32	20	119	57.5	35	36		
Y50041-08S-04	8	6	04	54	30	8	24	重系列 (S)	
Y50041-08S-05	8	8	05	56	32	8	24		
Y50041-08S-06	8	10	06	58	33	8	24		
Y50041-10S-04	10	6	04	54	31	10	23		
Y50041-12S-04	12	6	04	57	35	12	25		
Y50041-12S-05	12	8	05	59	35.5	12	25		
Y50041-14-05	14	8	05	61	37	14	29		
Y50041-14-06	14	10	06	62	37.5	14	29		
Y50041-14-08	14	13	08	74	38.5	14	29		
Y50041-16-08	16	13	08	77	41.5	16	30		
Y50041-16-10	16	16	10	88	43	16	30		
Y50041-20-10	20	16	10	93	48	20	36		
Y50041-20-12	20	19	12	101	52.5	20	36		
Y50041-25-12	25	19	12	102	54	25	40		
Y50041-25-16	25	25	16	110	55	25	40		
Y50041-30-16	30	25	16	114	59.5	30	44		
Y50041-30-20	30	32	20	125	63.5	30	44		
Y50041-38-16	38	25	16	119	63.5	38	50		
Y50041-38-20	38	32	20	129	68	38	50		

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为Y50042-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is Y50042-XX-XX.

Y50091

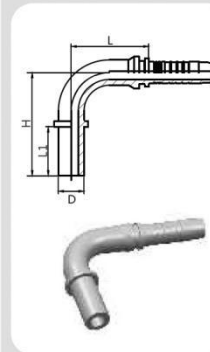90°弯公制卡套式直管
90°Metric Standpipe Straight


代号 PART NO.	管子外径 TUBE O.D		软管 HOSE BORE		尺寸 DIMENSIONS				备注 NOTE
	管子外径 TUBE O.D	公称内径DN	标号 DASH	L	H	D	L1		
Y50091-06L-04	6	6	04	31	44	6	22	轻系列 (L)	
Y50091-10L-05	10	8	05	33	53	10	23		
Y50091-10L-06	10	10	06	36.5	55	10	23		
Y50091-12L-06	12	10	06	36.5	60	12	25		
Y50091-12L-08	12	13	08	43.5	67	12	25		
Y50091-15-08	15	13	08	43.5	69	15	25		
Y50091-18-10	18	16	10	55	73	18	26		
Y50091-22-10	22	16	10	55	75	22	28		
Y50091-22-12	22	19	12	64	86	22	28		
Y50091-22-16	22	25	16	74	91.5	22	28		
Y50091-28-16	28	25	16	74	93.5	28	30		
Y50091-35-20	35	32	20	91.5	112.5	35	36		
Y50091-08S-04	8	6	04	30	48	8	24	重系列 (S)	
Y50091-08S-05	8	8	05	33	55	8	24		
Y50091-08S-06	8	10	06	36.5	58	8	24		
Y50091-10S-04	10	6	04	32	50	10	23		
Y50091-12S-04	12	6	04	32	50	12	23		
Y50091-12S-05	12	8	05	33	60	12	23		
Y50091-14-06	14	10	06	36.5	63	14	29		
Y50091-14-08	14	13	08	43.5	69	14	29		
Y50091-16-08	16	13	08	43.5	70	16	30		
Y50091-16-10	16	16	10	55	77.5	16	30		
Y50091-20-10	20	16	10	55	83.5	20	36		
Y50091-20-12	20	19	12	64	95.5	20	36		
Y50091-25-12	25	19	12	64	99.5	25	40		
Y50091-25-16	25	25	16	74	103.5	25	40		
Y50091-30-16	30	25	16	74	109.5	30	40		
Y50091-30-20	30	32	20	91.5	120.5	30	44		
Y50091-38-16	38	25	16	74	115.5	38	50		
Y50091-38-20	38	32	20	91.5	126.5	38	50		

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为Y50092-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is Y50092-XX-XX.



Y12611

英管外螺纹60°内锥面
BSP Metric 60° Cone Seat -ISO 12151-6

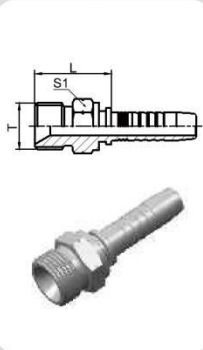


代号 PART NO.	螺纹T THREAD T	软管 HOSE BORE		尺寸 DIMENSIONS		
		公称内径DN	标号 DASH	L		S1
Y12611-04-04	G1/4"X19	6	04	24.5		14
Y12611-06-05	G3/8"X19	8	05	27.5		17
Y12611-06-06	G3/8"X19	10	06	27.5		17
Y12611-06-08	G3/8"X19	13	08	26.5		19
Y12611-08-06	G1/2"X14	10	06	30.5		22
Y12611-08-08	G1/2"X14	13	08	31		22
Y12611-10-08	G5/8"X14	13	08	32.5		24
Y12611-10-10	G5/8"X14	16	10	33.5		24
Y12611-12-08	G3/4"X14	13	08	35.5		27
Y12611-12-10	G3/4"X14	16	10	36.5		27
Y12611-12-12	G3/4"X14	19	12	36.5		27
Y12611-16-12	G1"X11	19	12	39.5		36
Y12611-16-16	G1"X11	25	16	41.5		36
Y12611-20-16	G1.1/4"X11	25	16	43.5		46
Y12611-20-20	G1.1/4"X11	32	20	44.5		46
Y12611-24-20	G1.1/2"X11	32	20	46		50
Y12611-24-24	G1.1/2"X11	38	24	46		50
Y12611-32-32	G2"X11	51	32	53.5		65

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为Y12612-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is Y12612-XX-XX.

Y12611A

英管外螺纹60°内锥面或六角端面组合垫密封的双用接头
BSP Male Double Use For 60° Cone Seat Or Bonded Seal ISO 12151-6

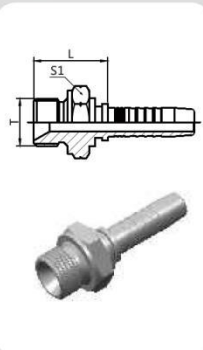


代号 PART NO.	螺纹T THREAD T	软管 HOSE BORE		尺寸 DIMENSIONS		
		公称内径DN	标号 DASH	L		S1
Y12611A-04-04	G1/4"X19	6	04	25.5		19
Y12611A-06-05	G3/8"X19	8	05	27.5		22
Y12611A-06-06	G3/8"X19	10	06	26		22
Y12611A-06-08	G3/8"X19	13	08	28		22
Y12611A-08-06	G1/2"X14	10	06	32		27
Y12611A-08-08	G1/2"X14	13	08	33		27
Y12611A-08-10	G1/2"X14	16	10	34		27
Y12611A-10-08	G5/8"X14	13	08	36		30
Y12611A-10-10	G5/8"X14	16	10	37		30
Y12611A-12-08	G3/4"X14	13	08	35		32
Y12611A-12-10	G3/4"X14	16	10	36		32
Y12611A-12-12	G3/4"X14	19	12	37		32
Y12611A-16-12	G1"X11	19	12	39		41
Y12611A-16-16	G1"X11	25	16	42		41
Y12611A-20-16	G1.1/4"X11	25	16	45		50
Y12611A-20-20	G1.1/4"X11	32	20	45		50
Y12611A-24-20	G1.1/2"X11	32	20	46		55
Y12611A-24-24	G1.1/2"X11	38	24	49		55
Y12611A-32-32	G2"X11	51	32	54.5		70

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为Y12612A-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is Y12612A-XX-XX.

Y22611

英管内螺纹60°外锥面
BSP Female 60° Cone ISO 12151-6




代号 PART NO.	螺纹T THREAD T	软管 HOSE BORE		尺寸 DIMENSIONS		
		公称内径DN	标号 DASH	L		S1
Y22611-02-04	G1/8" X28	6	04	16		14
Y22611-04-04	G1/4" X19	6	04	19		19
Y22611-04-05	G1/4" X19	8	05	19		19
Y22611-04-06	G1/4" X19	10	06	19		19
Y22611-06-04T	G3/8" X19	6	04	18		22
Y22611-06-05T	G3/8" X19	8	05	19		22
Y22611-06-06	G3/8" X19	10	06	19.5		22
Y22611-06-08	G3/8" X19	13	08	20		22
Y22611-08-06T	G1/2" X14	10	06	20.5		27
Y22611-08-08	G1/2" X14	13	08	21.5		27
Y22611-10-08T	G5/8" X14	13	08	22.5		30
Y22611-10-10	G5/8" X14	16	10	23		30
Y22611-12-10T	G3/4" X14	16	10	23		32
Y22611-12-12	G3/4" X14	19	12	24		32
Y22611-16-12T	G1" X11	19	12	24		41
Y22611-16-16	G1" X11	25	16	26		41
Y22611-20-16T	G1.1/4" X11	25	16	27.5		50
Y22611-20-20	G1.1/4" X11	32	20	30.5		50
Y22611-24-20T	G1.1/2" X11	32	20	32		55
Y22611-24-24	G1.1/2" X11	38	24	31.5		55
Y22611-32-24T	G2" X11	38	24	33.5		70
Y22611-32-32	G2" X11	51	32	34		70

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为Y22612-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is Y22612-XX-XX.




Y22641

45°英管内螺纹60°外锥面
45° BSP Female 60° Cone ISO 12151-6



Y22641-T




代号 PART NO.	螺纹T THREAD T	软管 HOSE BORE		尺寸 DIMENSIONS		
		公称内径DN	标号 DASH	L	H	S1
Y22641-02-04	G1/8"X28	6	04	38.8	15	14
Y22641-04-04	G1/4"X19	6	04	38.8	15	19
Y22641-04-05	G1/4"X19	8	05	41.7	18	19
Y22641-04-06	G1/4"X19	10	06	45	19	19
Y22641-06-04T	G3/8"X19	6	04	39.8	16	22
Y22641-06-05T	G3/8"X19	8	05	41.7	18	22
Y22641-06-06	G3/8"X19	10	06	44	18	22
Y22641-06-08	G3/8"X19	13	08	54.3	23	22
Y22641-08-06T	G1/2"X14	10	06	44	18	27
Y22641-08-08	G1/2"X14	13	08	51.3	20	27
Y22641-10-08T	G5/8"X14	13	08	54.3	23	30
Y22641-10-10	G5/8"X14	16	10	64.2	25	30
Y22641-12-10T	G3/4"X14	16	10	67.2	28	32
Y22641-12-12	G3/4"X14	19	12	71.7	29	32
Y22641-16-12T	G1"X11	19	12	74.7	32	41
Y22641-16-16	G1"X11	25	16	84.4	35	41
Y22641-20-16T	G1.1/4"X11	25	16	88.4	39	50
Y22641-20-20	G1.1/4"X11	32	20	100.8	40	50
Y22641-24-20T	G1.1/2"X11	32	20	114.8	54	55
Y22641-24-24	G1.1/2"X11	38	24	121.1	50	55
Y22641-32-24T	G2"X11	38	24	130.1	59	70
Y22641-32-32	G2"X11	51	32	155	70	70


注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为Y22642-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is Y22642-XX-XX.

Y22691

90°英管内螺纹60°外锥面
BSP Female 60° Cone ISO 12151-6



Y22691-T




代号 PART NO.	螺纹T THREAD T	软管 HOSE BORE		尺寸 DIMENSIONS		
		公称内径DN	标号 DASH	L	H	S1
Y22691-02-04	G1/8" X28	6	04	32	27	14
Y22691-04-04	G1/4" X19	6	04	32	28	19
Y22691-04-05	G1/4" X19	8	05	32.5	31.5	19
Y22691-04-06	G1/4" X19	10	06	36.5	34	19
Y22691-06-04T	G3/8" X19	6	04	32	31	22
Y22691-06-05T	G3/8" X19	8	05	32.5	34	22
Y22691-06-06	G3/8" X19	10	06	36.5	34	22
Y22691-06-08	G3/8" X19	13	08	44.5	42	22
Y22691-08-06T	G1/2" X14	10	06	36.5	35	27
Y22691-08-08	G1/2" X14	13	08	44.5	41	27
Y22691-10-08T	G5/8" X14	13	08	44.5	45	30
Y22691-10-10	G5/8" X14	16	10	55	51	30
Y22691-12-10T	G3/4" X14	16	10	55	56	32
Y22691-12-12	G3/4" X14	19	12	62	58	32
Y22691-16-12T	G1" X11	19	12	62	62	41
Y22691-16-16	G1" X11	25	16	74	70	41
Y22691-20-16T	G1.1/4" X11	25	16	74	76	50
Y22691-20-20	G1.1/4" X11	32	20	91.5	85	50
Y22691-24-20T	G1.1/2" X11	32	20	91.5	92	55
Y22691-24-24	G1.1/2" X11	38	24	108	100	55
Y22691-32-24T	G2" X11	38	24	108	110	70
Y22691-32-32	G2" X11	51	32	133.8	140	70

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为Y22692-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is Y22692-XX-XX.

Y22611-OR



Y22611-ORT




英管内螺纹60°外锥面带O型圈
BSP Female 60°O-Ring Cone ISO 12151-6


代号 PART NO.	螺纹T THREAD T	软管 HOSE BORE		尺寸 DIMENSIONS		
		公称内径DN	标号 DASH	L	H	S1
Y22611-02-04OR	G1/8" X28	6	04	15		14
Y22611-04-04OR	G1/4" X19	6	04	19		19
Y22611-04-05OR	G1/4" X19	8	05	19		19
Y22611-04-06OR	G1/4" X19	10	06	19		19
Y22611-06-04ORT	G3/8" X19	6	04	18		22
Y22611-06-05ORT	G3/8" X19	8	05	19		22
Y22611-06-06OR	G3/8" X19	10	06	19.5		22
Y22611-06-08OR	G3/8" X19	13	08	20		22
Y22611-08-06ORT	G1/2" X14	10	06	21		27
Y22611-08-08OR	G1/2" X14	13	08	21.5		27
Y22611-10-08ORT	G5/8" X14	13	08	21.5		30
Y22611-10-10OR	G5/8" X14	16	10	23		30
Y22611-12-10ORT	G3/4" X14	16	10	23		32
Y22611-12-12ORT	G3/4" X14	19	12	24		32
Y22611-16-12ORT	G1" X11	19	12	25		41
Y22611-16-16OR	G1" X11	25	16	27		41
Y22611-20-16ORT	G1.1/4" X11	25	16	28.5		50
Y22611-20-20OR	G1.1/4" X11	32	20	30.5		50
Y22611-24-20ORT	G1.1/2" X11	32	20	32		55
Y22611-24-24OR	G1.1/2" X11	38	24	31.5		55
Y22611-32-24ORT	G2" X11	38	24	33.5		70
Y22611-32-32OR	G2" X11	51	32	34		70

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为Y22612-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is Y22612-XX-XX.

Y22641-OR



Y22641-ORT



45°英管内螺纹60°外锥面带O型圈
45°BSP Female 60°O-Ring Cone ISO 12151-6


代号 PART NO.	螺纹T THREAD T	软管 HOSE BORE		尺寸 DIMENSIONS		
		公称内径DN	标号 DASH	L	H	S1
Y22641-02-04OR	G1/8" X28	6	04	38.8	15	14
Y22641-04-04OR	G1/4" X19	6	04	38.8	15	19
Y22641-04-05OR	G1/4" X19	8	05	41.7	18	19
Y22641-04-06OR	G1/4" X19	10	06	45	19	19
Y22641-06-04ORT	G3/8" X19	6	04	39.8	16	22
Y22641-06-05ORT	G3/8" X19	8	05	41.7	18	22
Y22641-06-06OR	G3/8" X19	10	06	44	18	22
Y22641-06-08OR	G3/8" X19	13	08	54.3	23	22
Y22641-08-06ORT	G1/2" X14	10	06	44	18	27
Y22641-08-08OR	G1/2" X14	13	08	51.3	20	27
Y22641-10-08ORT	G5/8" X14	13	08	54.3	23	30
Y22641-10-10OR	G5/8" X14	16	10	64.2	25	30
Y22641-12-10ORT	G3/4" X14	16	10	67.2	28	32
Y22641-12-12OR	G3/4" X14	19	12	71.7	29	32
Y22641-16-12ORT	G1" X11	19	12	74.7	32	41
Y22641-16-16OR	G1" X11	25	16	84.4	35	41
Y22641-20-16ORT	G1.1/4" X11	25	16	88.4	39	50
Y22641-20-20OR	G1.1/4" X11	32	20	100.8	40	50
Y22641-24-20ORT	G1.1/2" X11	32	20	114.8	54	55
Y22641-24-24OR	G1.1/2" X11	38	24	121.1	50	55
Y22641-32-24ORT	G2" X11	38	24	130.1	59	70
Y22641-32-32OR	G2" X11	51	32	155	70	70

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为Y22642-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is Y22642-XX-XX.




Y22691-OR

90°英管内螺纹60°外锥面带O型圈
90°BSP Female 60°O-Ring Cone ISO 12151-6



Y22691-ORT




代号 PART NO.	螺纹T THREAD T	软管 HOSE BORE		尺寸 DIMENSIONS			
		公称内径DN	标号 DASH	L	H	S1	
Y22691-02-04OR	G1/8 " X28	6	04	32	27	14	
Y22691-04-04OR	G1/4 " X19	6	04	32	28	19	
Y22691-04-05OR	G1/4 " X19	8	05	32.5	31.5	19	
Y22691-04-06OR	G1/4 " X19	10	06	36.5	34	19	
Y22691-06-04ORT	G3/8 " X19	6	04	32	31	22	
Y22691-06-05ORT	G3/8 " X19	8	05	32.5	34	22	
Y22691-06-06OR	G3/8 " X19	10	06	36.5	34	22	
Y22691-06-08OR	G3/8 " X19	13	08	44.5	42	22	
Y22691-08-06ORT	G1/2 " X14	10	06	36.5	35	27	
Y22691-08-08OR	G1/2 " X14	13	08	44.5	41	27	
Y22691-10-08ORT	G5/8 " X14	13	08	44.5	45	30	
Y22691-10-10OR	G5/8 " X14	16	10	55	51	30	
Y22691-12-10ORT	G3/4 " X14	16	10	55	56	32	
Y22691-12-12OR	G3/4 " X14	19	12	62	58	32	
Y22691-16-12ORT	G1 " X11	19	12	62	62	41	
Y22691-16-16OR	G1 " X11	25	16	74	70	41	
Y22691-20-16ORT	G1.1/4 " X11	25	16	74	76	50	
Y22691-20-20OR	G1.1/4 " X11	32	20	91.5	85	50	
Y22691-24-20ORT	G1.1/2 " X11	32	20	91.5	92	55	
Y22691-24-24OR	G1.1/2 " X11	38	24	108	100	55	
Y22691-32-24ORT	G2 " X11	38	24	108	110	70	
Y22691-32-32OR	G2 " X11	51	32	133.8	140	70	

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为Y22692-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is Y22692-XX-XX.

Y22611D-SM

英管内螺纹60°外锥面双六角
BSP Female 60° Cone Double Hexangon ISO 12151-6




代号 PART NO.	螺纹T THREAD T	软管 HOSE BORE		尺寸 DIMENSIONS			
		公称内径DN	标号 DASH	L	S1	S2	
Y22611D-04-04SM	G1/4 " X19	6	04	23	14	19	
Y22611D-06-06SM	G3/8 " X19	10	06	25	17	22	
Y22611D-08-08SM	G1/2 " X14	13	08	28.5	22	27	
Y22611D-10-08SM	G5/8 " X14	13	08	30	22	30	
Y22611D-12-08SM	G3/4 " X14	13	08	31.5	27	32	
Y22611D-12-12SM	G3/4 " X14	19	12	32.5	27	32	
Y22611D-16-16SM	G1 " X11	25	16	36.3	32	41	
Y22611D-20-20SM	G1.1/4 " X11	32	20	41.5	41	50	

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为Y22612D-XX-XXSM。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is Y22612D-XX-XXSM.

Y22611D

英管内螺纹60°外锥面双六角
BSP Female 60° Cone Double Hexangon ISO 12151-6




代号 PART NO.	螺纹T THREAD T	软管 HOSE BORE		尺寸 DIMENSIONS			
		公称内径DN	标号 DASH	L	S1	S2	
Y22611D-04-04	G1/4 " X19	6	04	23.5	19	19	
Y22611D-06-06	G3/8 " X19	10	06	26.5	22	22	
Y22611D-08-08	G1/2 " X14	13	08	31	27	27	
Y22611D-10-08	G5/8 " X14	13	08	32	30	30	
Y22611D-12-08	G3/4 " X14	13	08	33	32	32	
Y22611D-12-12	G3/4 " X14	19	12	34	32	32	
Y22611D-16-16	G1 " X11	25	16	35.5	41	41	
Y22611D-20-20	G1.1/4 " X11	32	20	43.5	50	50	

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为Y22612D-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is Y22612D-XX-XX.

Y22691K

90°英管短身内螺纹60°外锥面
90°BSP Compact Female 60° Cone




代号 PART NO.	螺纹T THREAD T	软管 HOSE BORE		尺寸 DIMENSIONS			
		公称内径DN	标号 DASH	L	H	S1	S2
Y22691K-04-04	G1/4 " X19	6	04	17.5	22	14	19
Y22691K-06-04	G3/8 " X19	6	04	20	24	16	22
Y22691K-06-05	G3/8 " X19	8	05	20	24	16	22
Y22691K-06-06	G3/8 " X19	10	06	20	24	16	22
Y22691K-08-06	G1/2 " X14	10	06	23	26.5	19	27
Y22691K-08-08	G1/2 " X14	13	08	23.5	28.5	19	27
Y22691K-10-10	G5/8 " X14	16	10	25	29.5	22	30
Y22691K-12-12	G3/4 " X14	19	12	27.5	33	27	32
Y22691K-16-16	G1 " X11	25	16	32.5	38.1	33	41



Y13011

英锥管外螺纹
BSPT Male



代号 PART NO.	螺纹T THREAD T	软管 HOSE BORE		尺寸 DIMENSIONS		
		公称内径DN	标号 DASH	L		S1
Y13011-02-04	R1/8"X28	6	04	18.5		12
Y13011-04-04	R1/4"X19	6	04	21		17
Y13011-04-05	R1/4"X19	8	05	21		17
Y13011-04-06	R1/4"X19	10	06	21		17
Y13011-06-04	R3/8"X19	6	04	21.1		17
Y13011-06-05	R3/8"X19	8	05	21.1		17
Y13011-06-06	R3/8"X19	10	06	21.1		17
Y13011-06-08	R3/8"X19	13	08	23.6		19
Y13011-08-06	R1/2"X14	10	06	26.3		22
Y13011-08-08	R1/2"X14	13	08	26.8		22
Y13011-08-10	R1/2"X14	16	10	26.8		22
Y13011-08-12	R1/2"X14	19	12	29.8		27
Y13011-12-08	R3/4"X14	13	08	27.5		27
Y13011-12-10	R3/4"X14	16	10	28.5		27
Y13011-12-12	R3/4"X14	19	12	29.3		27
Y13011-12-16	R3/4"X14	25	16	30		32
Y13011-16-12	R1"X11	19	12	35.1		36
Y13011-16-16	R1"X11	25	16	36.1		36
Y13011-20-20	R1.1/4"X11	32	20	36.8		46
Y13011-24-24	R1.1/2"X11	38	24	38.8		50
Y13011-32-24	R2"X11	38	24	42.1		65
Y13011-32-32	R2"X11	51	32	42.1		65


注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为Y13012-XX-XX。
Note: 1. For use with braided hoses. 2. If use with spiral hoses, hose fitting series number is Y13012-XX-XX.

Y22111

英管内螺纹球面
BSP Female Multiseal



22111-T




代号 PART NO.	螺纹T THREAD T	软管 HOSE BORE		尺寸 DIMENSIONS		
		公称内径DN	标号 DASH	L		S1
Y22111-02-04	G1/8"X28	6	04	17.5		14
Y22111-04-04	G1/4"X19	6	04	19.5		19
Y22111-06-05T	G3/8"X19	8	05	20		22
Y22111-06-06	G3/8"X19	10	06	20.5		22
Y22111-06-08	G3/8"X19	13	08	21		22
Y22111-08-06T	G1/2"X14	10	06	23		27
Y22111-08-08	G1/2"X14	13	08	24		27
Y22111-08-10	G1/2"X14	16	10	24.5		27
Y22111-10-08T	G5/8"X14	13	08	24		30
Y22111-10-10	G5/8"X14	16	10	25		30
Y22111-10-12	G5/8"X14	19	12	25		30
Y22111-12-10T	G3/4"X14	16	10	26		32
Y22111-12-12	G3/4"X14	19	12	26		32
Y22111-16-12T	G1"X11	19	12	27		41
Y22111-16-16	G1"X11	25	16	28		41
Y22111-20-16T	G1.1/4"X11	25	16	28		50
Y22111-20-20	G1.1/4"X11	32	20	31.5		50
Y22111-24-20T	G1.1/2"X11	32	20	33		55
Y22111-24-24	G1.1/2"X11	38	24	33		55
Y22111-32-24T	G2"X11	38	24	35		70
Y22111-32-32	G2"X11	51	32	35		70

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为Y22112-XX-XX。 Note: 1. For use with braided hoses. 2. If use with spiral hoses, hose fitting series number is Y22112-XX-XX.



Y22141




45°英管内螺纹球面
45°BSP Female Multiseal

代号 PART NO.	螺纹T THREAD T	软管 HOSE BORE		尺寸 DIMENSIONS		
		公称内径DN	标号 DASH	L	H	S1
Y22141-02-04	G1/8" X28	6	04	43	21.6	14
Y22141-04-04	G1/4" X19	6	04	43	21.6	19
Y22141-06-05T	G3/8" X19	8	05	46	22.9	22
Y22141-06-06	G3/8" X19	10	06	50	23.9	22
Y22141-06-08	G3/8" X19	13	08	58	25.5	22
Y22141-08-06T	G1/2" X14	10	06	51	25	27
Y22141-08-08	G1/2" X14	13	08	61	26.8	27
Y22141-08-10	G1/2" X14	16	10	68	28	27
Y22141-10-08T	G5/8" X14	13	08	60	27.5	30
Y22141-10-10	G5/8" X14	16	10	68.5	28.8	30
Y22141-10-12	G5/8" X14	19	12	74.5	32	30
Y22141-12-10T	G3/4" X14	16	10	67	27	32
Y22141-12-12	G3/4" X14	19	12	76	33.7	32
Y22141-16-12T	G1" X11	19	12	81.6	33	41
Y22141-16-16	G1" X11	25	16	88	35.1	41
Y22141-20-16T	G1.1/4" X11	25	16	89.5	36.5	50
Y22141-20-20	G1.1/4" X11	32	20	101.5	40.8	50
Y22141-24-20T	G1.1/2" X11	32	20	104	43	55
Y22141-24-24	G1.1/2" X11	38	24	117.5	48.2	55
Y22141-32-24T	G2" X11	38	24	120	51	70
Y22141-32-32	G2" X11	51	32	138	57	70

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为Y22142-XX-XXRW。 Note:1.For use with braided hoses. 2.If use with spiral hoses, hose fitting series number is Y22142-XX-XXRW.

Y22191




90°英管内螺纹球面
90°BSP Female Multiseal

代号 PART NO.	螺纹T THREAD T	软管 HOSE BORE		尺寸 DIMENSIONS		
		公称内径DN	标号 DASH	L	H	S1
Y22191-02-04	G1/8" X28	6	04	30.5	33	14
Y22191-04-04	G1/4" X19	6	04	30.5	37	19
Y22191-06-05T	G3/8" X19	8	05	33	41.5	22
Y22191-06-06	G3/8" X19	10	06	36.5	43.5	22
Y22191-06-08	G3/8" X19	13	08	43.5	49	22
Y22191-08-06T	G1/2" X14	10	06	36.5	46	27
Y22191-08-08	G1/2" X14	13	08	43.5	51.5	27
Y22191-08-10	G1/2" X14	16	10	55	56	27
Y22191-10-08T	G5/8" X14	13	08	43.5	52	30
Y22191-10-10	G5/8" X14	16	10	55	56.5	30
Y22191-10-12	G5/8" X14	19	12	64	64.5	30
Y22191-12-10T	G3/4" X14	16	10	55	58.5	32
Y22191-12-12	G3/4" X14	19	12	63	66.5	32
Y22191-16-12T	G1" X11	19	12	63	67.5	41
Y22191-16-16	G1" X11	25	16	74	74.5	41
Y22191-20-16T	G1.1/4" X11	25	16	74	76.5	50
Y22191-20-20	G1.1/4" X11	32	20	91.5	89	50
Y22191-24-20T	G1.1/2" X11	32	20	91.5	92.5	55
Y22191-24-24	G1.1/2" X11	38	24	109	106	55
Y22191-32-24T	G2" X11	38	24	109	105	70
Y22191-32-32	G2" X11	51	32	129	125.5	70

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为Y22192-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses, hose fitting series number is Y22192-XX-XX.

Y28611




日本公制内螺纹 60°内锥面
JIS Metric Female 60° Cone Seat

代号 PART NO.	螺纹T THREAD T	软管 HOSE BORE		尺寸 DIMENSIONS		
		公称内径DN	标号 DASH	L	S1	S2
Y28611-12-04	M12X1.5	6	04	20.5	17	17
Y28611-14-04	M14X1.5	6	04	21	19	19
Y28611-14-06	M14X1.5	10	06	21	19	19
Y28611-16-04	M16X1.5	6	04	24	22	22
Y28611-16-05	M16X1.5	8	05	24	22	22
Y28611-16-06	M16X1.5	10	06	24	22	22
Y28611-18-06	M18X1.5	10	06	25	24	24
Y28611-18-08	M18X1.5	13	08	25.5	24	24
Y28611-20-08	M20X1.5	13	08	28.5	27	27
Y28611-22-08	M22X1.5	13	08	25.5	27	27
Y28611-24-08	M24X1.5	13	08	28	32	32
Y28611-24-10	M24X1.5	16	10	28.5	32	32
Y28611-27-10	M27X1.5	16	10	28.5	32	32
Y28611-30-12	M30X1.5	19	12	28.5	36	36
Y28611-33-12	M33X1.5	19	12	31	41	41
Y28611-33-16	M33X1.5	25	16	32	41	41
Y28611-36-20	M36X1.5	32	20	35.5	46	46

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为Y28612-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses, hose fitting series number is Y28612-XX-XX.




Y28611GM

日本公制内螺纹60°内锥面
JIC Metric Female 60° Cone Seat

代号 PART NO.	螺纹T THREAD T	软管 HOSE BORE		尺寸 DIMENSIONS			
		公称内径DN	标号 DASH	L	H	S1	S2
Y28611GM-12-04	M12X1.5	6	04	20		17	
Y28611GM-14-04	M14X1.5	6	04	21		19	
Y28611GM-14-06	M14X1.5	10	06	21		19	
Y28611GM-16-04	M16X1.5	6	04	24		22	
Y28611GM-16-05	M16X1.5	8	05	24		22	
Y28611GM-16-06	M16X1.5	10	06	24		22	
Y28611GM-18-06	M18X1.5	10	06	25		24	
Y28611GM-18-08	M18X1.5	13	08	24.5		24	
Y28611GM-20-08	M20X1.5	13	08	28.5		27	
Y28611GM-22-08	M22X1.5	13	08	25.5		27	
Y28611GM-24-08	M24X1.5	13	08	27.5		32	
Y28611GM-24-10	M24X1.5	16	10	28.5		32	
Y28611GM-27-10	M27X1.5	16	10	28.5		32	
Y28611GM-30-12	M30X1.5	19	12	28.5		36	
Y28611GM-33-12	M33X1.5	19	12	31		41	
Y28611GM-33-16	M33X1.5	25	16	32		41	
Y28611GM-36-20	M36X1.5	32	20	35.5		46	

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为Y28612GM-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is Y28612GM-XX-XX.


Y28691

90°日本公制内螺纹60°内锥面
90°JIC Metric Female 60° Cone Seat

代号 PART NO.	螺纹T THREAD T	软管 HOSE BORE		尺寸 DIMENSIONS			
		公称内径DN	标号 DASH	L	H	S1	S2
Y28691-12-04	M12X1.5	6	04	30	29.5	17	17
Y28691-14-04	M14X1.5	6	04	30	30	19	19
Y28691-14-06	M14X1.5	10	06	36.5	28	19	19
Y28691-16-04	M16X1.5	6	04	30	28	22	22
Y28691-16-05	M16X1.5	8	05	36.5	37.5	22	22
Y28691-16-06	M16X1.5	10	06	36.5	39	22	22
Y28691-18-06	M18X1.5	10	06	36.5	41	24	24
Y28691-18-08	M18X1.5	13	08	43.5	46.5	24	24
Y28691-22-08	M22X1.5	13	08	43.5	47	27	27
Y28691-24-08	M24X1.5	13	08	43.5	48.5	32	32
Y28691-24-10	M24X1.5	16	10	55	53	32	32
Y28691-30-12	M30X1.5	19	12	64	62	36	36
Y28691-33-12	M33X1.5	19	12	64	70	41	41
Y28691-33-16	M33X1.5	25	16	74	77	41	41
Y28691-36-20	M36X1.5	32	20	91.5	92	46	46

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为Y28692-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is Y28692-XX-XX.


Y28641

45°日本公制内螺纹60°内锥面
45°JIC Metric Female 60° Cone Seat

代号 PART NO.	螺纹T THREAD T	软管 HOSE BORE		尺寸 DIMENSIONS			
		公称内径DN	标号 DASH	L	H	S1	S2
Y28641-12-04	M12X1.5	6	04	42.5	19	17	17
Y28641-14-04	M14X1.5	6	04	42.5	19	19	19
Y28641-14-06	M14X1.5	10	06	49	23	19	19
Y28641-16-04	M16X1.5	6	04	45	21.5	22	22
Y28641-16-05	M16X1.5	8	05	49	25.5	22	22
Y28641-16-06	M16X1.5	10	06	51.5	25.5	22	22
Y28641-18-06	M18X1.5	10	06	52	26	24	24
Y28641-18-08	M18X1.5	13	08	61	28.5	24	24
Y28641-22-08	M22X1.5	13	08	61	28.5	27	27
Y28641-24-08	M24X1.5	13	08	62.5	30	32	32
Y28641-24-10	M24X1.5	16	10	71	31	32	32
Y28641-30-12	M30X1.5	19	12	77	34	36	36
Y28641-33-12	M33X1.5	19	12	78.5	36	41	41
Y28641-33-16	M33X1.5	25	16	90	37	41	41
Y28641-36-20	M36X1.5	32	20	104	43.5	46	46

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为Y28642-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is Y28642-XX-XX.

Y29611


日本英制内螺纹60°内锥面
JIC GAS Female 60° Cone Seat JIS B8363

代号 PART NO.	螺纹T THREAD T	软管 HOSE BORE		尺寸 DIMENSIONS			
		公称内径DN	标号 DASH	L	H	S1	S2
Y29611-04-04	G1/4" X19	6	04	21		19	19
Y29611-04-05	G1/4" X19	8	05	21		19	19
Y29611-06-04	G3/8" X19	6	04	23.5		22	22
Y29611-06-06	G3/8" X19	10	06	23		22	22
Y29611-08-06	G1/2" X14	10	06	26		27	27
Y29611-08-08	G1/2" X14	13	08	26.5		27	27
Y29611-10-10	G5/8" X14	16	10	31		30	30
Y29611-12-10	G3/4" X14	16	10	31.5		32	32
Y29611-12-12	G3/4" X14	19	12	31.5		32	32
Y29611-16-16	G1" X11	25	16	32		41	41

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为Y29612-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is Y29612-XX-XX.




Y29641

45°日本英制内螺纹60°内锥面
45°JIC GAS Female 60°Cone Seat JIS B8363

代号 PART NO.	螺纹T THREAD T	软管 HOSE BORE		尺寸 DIMENSIONS			
		公称内径DN	标号 DASH	L	H	S1	S2
Y29641-04-04	G1/4" X19	6	04	42.5	19.5	19	19
Y29641-04-05	G1/4" X19	8	05	47	23	19	19
Y29641-06-04	G3/8" X19	6	04	44.5	21	22	22
Y29641-06-06	G3/8" X19	10	06	51	25	22	22
Y29641-08-06	G1/2" X14	10	06	53	27	27	27
Y29641-08-08	G1/2" X14	13	08	61.5	29	27	27
Y29641-10-10	G5/8" X14	16	10	72.5	32.5	30	30
Y29641-12-10	G3/4" X14	16	10	72.5	33	32	32
Y29641-12-12	G3/4" X14	19	12	79	36	32	32
Y29641-16-16	G1" X11	25	16	90	37	41	41

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为Y29642-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is Y29642-XX-XX.


Y15611

布锥管外螺纹
NPT Male -SAE J516

代号 PART NO.	螺纹T THREAD T	软管 HOSE BORE		尺寸 DIMENSIONS		
		公称内径DN	标号 DASH	L		S1
Y15611-02-04	NPT1/8" X27	6	04	18.5		12
Y15611-04-04	NPT1/4" X18	6	04	22.5		17
Y15611-04-05	NPT1/4" X18	8	05	22.5		17
Y15611-04-06	NPT1/4" X18	10	06	22.5		17
Y15611-06-04	NPT3/8" X18	6	04	23		19
Y15611-06-05	NPT3/8" X18	8	05	23.5		19
Y15611-06-06	NPT3/8" X18	10	06	23.9		19
Y15611-06-08	NPT3/8" X18	13	08	24.4		19
Y15611-08-06	NPT1/2" X14	10	06	26.5		22
Y15611-08-08	NPT1/2" X14	13	08	26.5		22
Y15611-08-10	NPT1/2" X14	16	10	28		22
Y15611-12-08	NPT3/4" X14	13	08	29		27
Y15611-12-10	NPT3/4" X14	16	10	29.5		27
Y15611-12-12	NPT3/4" X14	19	12	30		27
Y15611-12-16	NPT3/4" X14	25	16	31		32
Y15611-16-10	NPT1" X11.5	16	10	33.5		36
Y15611-16-12	NPT1" X11.5	19	12	34		36
Y15611-16-16	NPT1" X11.5	25	16	35		36
Y15611-20-16	NPT1.1/4" X11.5	25	16	37.5		46
Y15611-20-20	NPT1.1/4" X11.5	32	20	38.5		46
Y15611-24-24	NPT1.1/2" X11.5	38	24	40.5		50
Y15611-32-32	NPT2" X11.5	51	32	43.5		65

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为Y15612-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is Y15612-XX-XX.


Y29691

90°日本英制内螺纹60°内锥面
90°JIC GAS Female 60°Cone Seat JIS B8363

代号 PART NO.	螺纹T THREAD T	软管 HOSE BORE		尺寸 DIMENSIONS			
		公称内径DN	标号 DASH	L	H	S1	S2
Y29691-04-04	G1/4" X19	6	04	30.5	36	19	19
Y29691-04-05	G1/4" X19	8	05	33	39.5	19	19
Y29691-06-04	G3/8" X19	6	04	30.5	37	22	22
Y29691-06-06	G3/8" X19	10	06	36.5	44	22	22
Y29691-08-06	G1/2" X14	10	06	36.5	46	27	27
Y29691-08-08	G1/2" X14	13	08	44	51.5	27	27
Y29691-10-10	G5/8" X14	16	10	55	59	30	30
Y29691-12-10	G3/4" X14	16	10	55	57.5	32	32
Y29691-12-12	G3/4" X14	19	12	63	65.5	32	32
Y29691-16-16	G1" X11	25	16	74	74.5	41	41

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为Y29692-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is Y29692-XX-XX.


Y15611SW

布锥管旋转外螺纹
NPT Swivel Male

代号 PART NO.	螺纹T THREAD T	软管 HOSE BORE		尺寸 DIMENSIONS		
		公称内径DN	标号 DASH	L		S1
Y15611SW-04-04	NPT1/4" X18	6	04	47.3		19
Y15611SW-06-06	NPT3/8" X18	10	06	54		22
Y15611SW-08-08	NPT1/2" X14	13	08	64		27
Y15611SW-12-12	NPT3/4" X14	19	12	68.5		32




Y15691KSW


90°布锥管旋转外螺纹
90°NPT Swivel Male

代号 PART NO.	螺纹T THREAD T	软管 HOSE BORE		尺寸 DIMENSIONS			
		公称内径DN	标号 DASH	L	H	S1	S2
Y15691KSW-04-04	NPT1/4 " X18	6	04	25	59.5	16	19
Y15691KSW-06-06	NPT3/8 " X18	10	06	25	64.5	16	22
Y15691KSW-08-08	NPT1/2 " X14	13	08	28.5	71.5	19	27
Y15691KSW-12-12	NPT3/4 " X14	19	12	36	76.9	27	32

Y24211

美制ORFS内螺纹平面
ORFS Female Flat Seat ISO 12151-1 -SAE J516


Y24211-T



代号 PART NO.	螺纹T THREAD T	软管 HOSE BORE		尺寸 DIMENSIONS	
		公称内径DN	标号 DASH	L	S1
Y24211-04-04	9/16 " X18	6	04	22.5	17
Y24211-06-04T	11/16 " X16	6	04	22.5	22
Y24211-06-05T	11/16 " X16	8	05	23.5	22
Y24211-06-06	11/16 " X16	10	06	25.5	22
Y24211-08-06T	13/16 " X16	10	06	25	24
Y24211-08-08	13/16 " X16	13	08	28.5	24
Y24211-08-10	13/16 " X16	16	10	29.5	24
Y24211-10-08T	1 " X14	13	08	29	30
Y24211-10-10	1 " X14	16	10	33.5	30
Y24211-12-08T	1.3/16 " X12	13	08	31	36
Y24211-12-10T	1.3/16 " X12	16	10	32	36
Y24211-12-12	1.3/16 " X12	19	12	35	36
Y24211-16-12T	1.7/16 " X12	19	12	34	41
Y24211-16-16T	1.7/16 " X12	25	16	38	41
Y24211-20-16T	1.11/16 " X12	25	16	35	50
Y24211-20-20	1.11/16 " X12	32	20	40	50
Y24211-24-20T	2 " X12	32	20	36.5	60
Y24211-24-24T	2 " X12	38	24	36.5	60

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为Y24212-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is Y24212-XX-XX.


Y14211

美制ORFS外螺纹平面O型圈密封
ORFS Male O-Ring Seal ISO 12151-1 -SAE J1453

代号 PART NO.	螺纹T THREAD T	软管 HOSE BORE		尺寸 DIMENSIONS		
		公称内径DN	标号 DASH	L		S1
Y14211-04-04	9/16 " X18	6	04	22.5		17
Y14211-06-04	11/16 " X16	6	04	24		19
Y14211-06-06	11/16 " X16	10	06	24		19
Y14211-08-06	13/16 " X16	10	06	27.5		22
Y14211-08-08	13/16 " X16	13	08	28.5		22
Y14211-08-10	13/16 " X16	16	10	28.5		22
Y14211-10-08	1 " X14	13	08	32.5		27
Y14211-10-10	1 " X14	16	10	33.5		27
Y14211-12-08	1.3/16 " X12	13	08	35.5		32
Y14211-12-10	1.3/16 " X12	16	10	36		32
Y14211-12-12	1.3/16 " X12	19	12	36.5		32
Y14211-16-12	1.7/16 " X12	19	12	37		41
Y14211-16-16	1.7/16 " X12	25	16	38.5		41
Y14211-20-20	1.11/16 " X12	32	20	41.5		46
Y14211-24-24	2 " X12	38	24	43		55

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为Y14212-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is Y14212-XX-XX.


Y24211D

美制ORFS内螺纹平面双六角
ORFS Female Flat Seat Double Hexagon ISO 12151-1 -SAE J516


代号 PART NO.	螺纹T THREAD T	软管 HOSE BORE		尺寸 DIMENSIONS		
		公称内径DN	标号 DASH	L	S1	S2
Y24211D-04-04	9/16 " X18	6	04	27.5	14	17
Y24211D-06-04	11/16 " X16	6	04	30.5	19	22
Y24211D-06-05	11/16 " X16	8	05	30.5	19	22
Y24211D-06-06	11/16 " X16	10	06	30.5	19	22
Y24211D-08-06	13/16 " X16	10	06	33	22	24
Y24211D-08-08	13/16 " X16	13	08	33.5	22	24
Y24211D-08-10	13/16 " X16	16	10	34.5	24	24
Y24211D-10-08	1 " X14	13	08	40	27	30
Y24211D-10-10	1 " X14	16	10	41	27	30
Y24211D-12-08	1.3/16 " X12	13	08	31	36	36
Y24211D-12-10	1.3/16 " X12	16	10	32	36	36
Y24211D-12-12	1.3/16 " X12	19	12	35	36	36
Y24211D-16-16	1.7/16 " X12	25	16	35	41	41
Y24211D-20-16	1.11/16 " X12	25	16	35	50	50
Y24211D-20-20	1.11/16 " X12	32	20	40	50	50
Y24211D-24-20	2 " X12	32	20	36.5	60	60
Y24211D-24-24	2 " X12	38	24	36.5	60	60

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为Y24212D-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is Y24212D-XX-XX.

Y24241



Y24241-T




45°美制ORFS内螺纹平面
45°ORFS Female Flat Seat ISO 12151-1- SAE J516


代号 PART NO.	螺纹T THREAD T	软管 HOSE BORE		尺寸 DIMENSIONS		
		公称内径DN	标号 DASH	L	H	S1
Y24241-04-04	9/16" X18	6	04	33.8	10	17
Y24241-06-04T	11/16" X16	6	04	34.8	11	22
Y24241-06-05T	11/16" X16	8	05	34.7	11	22
Y24241-06-06	11/16" X16	10	06	37	11	22
Y24241-08-06T	13/16" X16	10	06	41	15	24
Y24241-08-08	13/16" X16	13	08	46.3	15	24
Y24241-08-10	13/16" X16	16	10	55.2	16	24
Y24241-10-08T	1" X14	13	08	47.3	16	30
Y24241-10-10	1" X14	16	10	55.2	16	30
Y24241-12-08T	1.3/16" X12	13	08	52.3	21	36
Y24241-12-10T	1.3/16" X12	16	10	60.2	21	36
Y24241-12-12	1.3/16" X12	19	12	63.7	21	36
Y24241-16-12T	1.7/16" X12	19	12	66.7	24	41
Y24241-16-16T	1.7/16" X12	25	16	73.4	24	41
Y24241-20-16T	1.11/16" X12	25	16	81.4	32	50
Y24241-20-20	1.11/16" X12	32	20	92.8	32	50
Y24241-24-20T	2" X12	32	20	102.8	42	60
Y24241-24-24T	2" X12	38	24	113.1	42	60

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为Y24242-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is Y24242-XX-XX.

Y24291



Y24291-T




90°美制ORFS内螺纹平面
90°ORFS Female Flat Seat ISO 12151-1- SAE J516

代号 PART NO.	螺纹T THREAD T	软管 HOSE BORE		尺寸 DIMENSIONS		
		公称内径DN	标号 DASH	L	H	S1
Y24291-04-04	9/16" X18	6	04	32	32	17
Y24291-06-04T	11/16" X16	6	04	32	38	22
Y24291-06-05T	11/16" X16	8	05	32.5	38	22
Y24291-06-06	11/16" X16	10	06	36.5	38	22
Y24291-08-06T	13/16" X16	10	06	36.5	41	24
Y24291-08-08	13/16" X16	13	08	44.5	41	24
Y24291-08-10	13/16" X16	16	10	55	47	24
Y24291-10-08T	1" X14	13	08	44.5	47	30
Y24291-10-10	1" X14	16	10	55	47	30
Y24291-12-08T	1.3/16" X12	13	08	44.5	58	36
Y24291-12-10T	1.3/16" X12	16	10	55	58	36
Y24291-12-12	1.3/16" X12	19	12	62	58	36
Y24291-16-12T	1.7/16" X12	19	12	62	71	41
Y24291-16-16T	1.7/16" X12	25	16	74	71	41
Y24291-20-16T	1.11/16" X12	25	16	74	78	50
Y24291-20-20	1.11/16" X12	32	20	91.5	78	50
Y24291-24-20T	2" X12	32	20	91.5	86	60
Y24291-24-24T	2" X12	38	24	108	86	60

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为Y24292-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is Y24292-XX-XX.

Y16711



美制JIC外螺纹74°外锥面
JIC Male 74° Cone ISO 12151-5 - SAE J514

代号 PART NO.	螺纹T THREAD T	软管 HOSE BORE		尺寸 DIMENSIONS		
		公称内径DN	标号 DASH	L	H	S1
Y16711-04-04	7/16" X20	6	04	26.5		12
Y16711-05-04	1/2" X20	6	04	26.5		14
Y16711-05-05	1/2" X20	8	05	26.5		14
Y16711-05-06	1/2" X20	10	06	26.5		17
Y16711-06-04	9/16" X18	6	04	26.5		17
Y16711-06-05	9/16" X18	8	05	26.5		17
Y16711-06-06	9/16" X18	10	06	26.5		17
Y16711-08-06	3/4" X16	10	06	31		22
Y16711-08-08	3/4" X16	13	08	31.5		22
Y16711-10-06	7/8" X14	10	06	32		24
Y16711-10-08	7/8" X14	13	08	34.5		24
Y16711-10-10	7/8" X14	16	10	35.5		24
Y16711-12-08	1.1/16" X12	13	08	39		27
Y16711-12-10	1.1/16" X12	16	10	40		27
Y16711-12-12	1.1/16" X12	19	12	40		27
Y16711-12-16	1.1/16" X12	25	16	41		32
Y16711-14-10	1.3/16" X12	16	10	40		32
Y16711-14-12	1.3/16" X12	19	12	40.5		32
Y16711-16-12	1.5/16" X12	19	12	42.5		36
Y16711-16-16	1.5/16" X12	25	16	43.5		36
Y16711-20-16	1.5/8" X12	25	16	46		46
Y16711-20-20	1.5/8" X12	32	20	47.5		46
Y16711-24-20	1.7/8" X12	32	20	53.5		50
Y16711-24-24	1.7/8" X12	38	24	53		50
Y16711-32-32	2.1/2" X12	51	32	64		65

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为Y16712-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is Y16712-XX-XX.



Y26711




美制JIC内螺纹74°内锥面
JIC Female 74° Cone Seat ISO 12151-5 -SAE J514


代号 PART NO.	螺纹T THREAD T	软管 HOSE BORE		尺寸 DIMENSIONS		
		公称内径DN	标号 DASH	L	S1	S2
Y26711-04-04	7/16" X20	6	04	15		14
Y26711-05-04	1/2" X20	6	04	15.5		17
Y26711-05-05	1/2" X20	8	05	15.5		17
Y26711-06-04T	9/16" X18	6	04	15.5		19
Y26711-06-05	9/16" X18	8	05	15.5		19
Y26711-06-06	9/16" X18	10	06	15.5		19
Y26711-07-06	9/16" X18	13	08	16		19
Y26711-08-06T	3/4" X16	10	06	17.5		22
Y26711-08-08	3/4" X16	13	08	18		22
Y26711-08-10	3/4" X16	16	10	19		22
Y26711-10-08T	7/8" X14	13	08	18		27
Y26711-10-10	7/8" X14	16	10	20		27
Y26711-10-12	7/8" X14	19	12	20		27
Y26711-12-08T	1.1/16" X12	13	08	20		32
Y26711-12-10T	1.1/16" X12	16	10	21.5		32
Y26711-12-12	1.1/16" X12	19	12	21.5		32
Y26711-14-12T	1.3/16" X12	19	12	21.5		36
Y26711-16-12T	1.5/16" X12	19	12	22		41
Y26711-16-16	1.5/16" X12	25	16	23		41
Y26711-20-16T	1.5/8" X12	25	16	25		50
Y26711-20-20	1.5/8" X12	32	20	26		50
Y26711-24-20T	1.7/8" X12	32	20	26.5		60
Y26711-24-24	1.7/8" X12	38	24	26.5		60
Y26711-32-24T	2.1/2" X12	38	24	26.5		75
Y26711-32-32T	2.1/2" X12	51	32	27		75

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为Y26712-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is Y26712-XX-XX.

Y26711-T



Y26711D




美制JIC内螺纹74°内锥面双六角
JIC Female 74° Cone Seat ISO 12151-5 Double Hexagon SAE J514

代号 PART NO.	螺纹T THREAD T	软管 HOSE BORE		尺寸 DIMENSIONS		
		公称内径DN	标号 DASH	L	S1	S2
Y26711D-04-04	7/16" X20	6	04	20	14	14
Y26711D-05-04	1/2" X20	6	04	20.5	17	17
Y26711D-06-04	9/16" X18	6	04	21	19	19
Y26711D-06-06	9/16" X18	10	06	21	19	19
Y26711D-08-06	3/4" X16	10	06	25	24	22
Y26711D-08-08	3/4" X16	13	08	24.5	24	22
Y26711D-08-10	3/4" X16	16	10	25.5	24	22
Y26711D-10-08	7/8" X14	13	08	28	27	27
Y26711D-10-10	7/8" X14	16	10	29	27	27
Y26711D-12-12	1.1/16" X12	19	12	31.5	32	32
Y26711D-16-12	1.5/16" X12	19	12	33.5	41	41
Y26711D-16-16	1.5/16" X12	25	16	34.5	41	41
Y26711D-16-20	1.5/16" X12	32	20	36.5	41	41
Y26711D-20-20	1.5/8" X12	32	20	39	50	50

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为Y26712D-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is Y26712D-XX-XX.

Y26711D-SM




美制JIC内螺纹74°内锥面双六角
JIC Female 74° Cone Seat ISO 12151-5 Double Hexagon SAE J514

代号 PART NO.	螺纹T THREAD T	软管 HOSE BORE		尺寸 DIMENSIONS		
		公称内径DN	标号 DASH	L	S1	S2
Y26711D-04-04SM	7/16" X20	6	04	20	12	14
Y26711D-05-04SM	1/2" X20	6	04	20.5	12	17
Y26711D-06-04SM	9/16" X18	6	04	21	14	19
Y26711D-06-06SM	9/16" X18	10	06	21	17	19
Y26711D-08-06SM	3/4" X16	10	06	25	19	22
Y26711D-08-08SM	3/4" X16	13	08	24.5	22	22
Y26711D-08-10SM	3/4" X16	16	10	25.5	22	22
Y26711D-10-08SM	7/8" X14	13	08	24	22	27
Y26711D-10-10SM	7/8" X14	16	10	27	22	27
Y26711D-12-12SM	1.1/16" X12	19	12	31.5	27	32
Y26711D-16-12SM	1.5/16" X12	19	12	31.5	32	41
Y26711D-16-16SM	1.5/16" X12	25	16	32.5	32	41
Y26711D-20-20SM	1.5/8" X12	32	20	37	41	50

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为Y26712D-XX-XXSM。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is Y26712D-XX-XXSM.

Y26741




45°美制JIC内螺纹74°内锥面
45°JIC Female 74° Cone Seat ISO 12151-5 -SAE J514

代号 PART NO.	螺纹T THREAD T	软管 HOSE BORE		尺寸 DIMENSIONS		
		公称内径DN	标号 DASH	L	H	S1
Y26741-04-04	7/16" X20	6	04	33.8	10	14
Y26741-05-04	1/2" X20	6	04	33.8	10	17
Y26741-05-05	1/2" X20	8	05	33.7	10	17
Y26741-06-04T	9/16" X18	6	04	34.8	11	19
Y26741-06-05	9/16" X18	8	05	34.7	11	19
Y26741-06-06	9/16" X18	10	06	37	11	19
Y26741-06-08	9/16" X18	13	08	46.3	15	19
Y26741-08-06T	3/4" X16	10	06	41	15	22
Y26741-08-08	3/4" X16	13	08	46.3	15	22
Y26741-08-10	3/4" X16	16	10	55.2	16	22
Y26741-10-08T	7/8" X14	13	08	47.3	16	27
Y26741-10-10	7/8" X14	16	10	55.2	16	27
Y26741-10-12	7/8" X14	19	12	63.7	21	27
Y26741-12-08T	1.1/16" X12	13	08	52.3	21	32
Y26741-12-10T	1.1/16" X12	16	10	60.2	21	32
Y26741-12-12	1.1/16" X12	19	12	63.7	21	32
Y26741-14-12T	1.3/16" X12	19	12	73.5	31	36
Y26741-16-12T	1.5/16" X12	19	12	66.7	24	41
Y26741-16-16	1.5/16" X12	25	16	73.4	24	41
Y26741-20-16T	1.5/8" X12	25	16	81.4	32	50
Y26741-20-20	1.5/8" X12	32	20	92.8	32	50
Y26741-24-20T	1.7/8" X12	32	20	102.8	42	60
Y26741-24-24	1.7/8" X12	38	24	113.1	42	60
Y26741-32-24T	2.1/2" X12	38	24	122.6	51.5	75
Y26741-32-32T	2.1/2" X12	51	32	136.5	51.5	75


注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为Y26742-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is Y26742-XX-XX.

Y26741-T






Y26791

90°美制JIC 内螺纹74°内锥面
90°JIC Female 74° Cone Seat ISO 12151-5 -SAE J514


代号 PART NO.	螺纹T THREAD T	软管 HOSE BORE		尺寸 DIMENSIONS		
		公称内径DN	标号 DASH	L	H	S1
Y26791-04-04	7/16" X20	6	04	32	32	14
Y26791-05-04	1/2" X20	6	04	32	32	17
Y26791-05-05	1/2" X20	8	05	32.5	32	17
Y26791-06-04T	9/16" X18	6	04	32	38	19
Y26791-06-05	9/16" X18	8	05	32.5	38	19
Y26791-06-06	9/16" X18	10	06	36.5	38	19
Y26791-06-08	9/16" X18	13	08	44.5	41	19
Y26791-08-06T	3/4" X16	10	06	36.5	41	22
Y26791-08-08	3/4" X16	13	08	44.5	41	22
Y26791-08-10	3/4" X16	16	10	55	47	22
Y26791-10-08T	7/8" X14	13	08	44.5	47	27
Y26791-10-10	7/8" X14	16	10	55	47	27
Y26791-10-12	7/8" X14	19	12	62	58	27
Y26791-12-08T	1.1/16" X12	13	08	44.5	58	32
Y26791-12-10T	1.1/16" X12	16	10	55	58	32
Y26791-12-12	1.1/16" X12	19	12	62	58	32
Y26791-14-12T	1.3/16" X12	19	12	64	63.5	36
Y26791-16-12T	1.5/16" X12	19	12	62	71	41
Y26791-16-16	1.5/16" X12	25	16	74	71	41
Y26791-20-16T	1.5/8" X12	25	16	74	78	50
Y26791-20-20	1.5/8" X12	32	20	91.5	78	50
Y26791-24-20T	1.7/8" X12	32	20	91.5	86	60
Y26791-24-24	1.7/8" X12	38	24	108	86	60
Y26791-32-24T	2.1/2" X12	38	24	108	140	75
Y26791-32-32T	2.1/2" X12	51	32	133.8	140	75

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为Y26792-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is Y26792-XX-XX.

Y26791-T




Y20011-T

公制内螺纹高压水管接头
Metric Female Waterwash Inserts


代号 PART NO.	螺纹T THREAD T	软管 HOSE BORE		尺寸 DIMENSIONS		
		公称内径DN	标号 DASH	L	D	d
Y20011-22-04T	M22X1.5	6	04	35	34.5	14
Y20011-22-05T	M22X1.5	8	05	35	34.5	14
Y20011-22-06T	M22X1.5	10	06	35	34.5	14

Y17811-S

美制外螺纹45°扩口
SAE 24° J512 FLARE

代号 PART NO.	软管 HOSE BORE		尺寸 DIMENSIONS		
	公称内径 DN	标号 DASH	L	S1	
Y17811-04-04S	6	04	43	12	
Y17811-05-04S	6	04	46.5	14	
Y17811-06-05S	8	05	48	17	
Y17811-06-06S	10	06	48	17	
Y17811-08-06S	10	06	50	19	
Y17811-08-08S	13	08	51	19	
Y17811-10-08S	13	08	52.5	24	
Y17811-10-10S	16	10	53	24	


Y26791-K

90°美制短身JIC 内螺纹74°内锥面
90°JIC Compact Female 74° Cone Seat SAE J514

代号 PART NO.	螺纹T THREAD T	软管 HOSE BORE		尺寸 DIMENSIONS			
		公称内径DN	标号 DASH	L	H	S1	S2
Y26791K-04-04	7/16" X20	6	04	17.5	18	11	14
Y26791K-05-05	1/2" X20	8	05	19.5	18	11	17
Y26791K-06-04	9/16" X18	6	04	19	21	14	19
Y26791K-06-06	9/16" X18	10	06	20	21	16	19
Y26791K-08-06	3/4" X16	10	06	23	25	19	24
Y26791K-08-08	3/4" X16	13	08	23.5	25	22	24
Y26791K-10-08	7/8" X14	13	08	23.5	27.5	22	27
Y26791K-10-10	7/8" X14	16	10	25	27.5	22	27
Y26791K-12-12	1.1/16" X12	19	12	27.5	30	27	32
Y26791K-16-16	1.5/16" X12	25	16	43	34.3	33	41

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为Y26792K-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is Y26792K-XX-XX.

Y87311

SAE ? 3000 PSI 61型
SAE Flange 3000 PSI Code 61 ISO 12151-3-SAE J516

代号 PART NO.	螺纹T THREAD T	软管 HOSE BORE		尺寸 DIMENSIONS		
		公称内径DN	标号 DASH	L	D	L1
Y87311-08-08	1/2"	13	08	46	30.2	6.73
Y87311-12-08	3/4"	13	08	47	38.1	6.73
Y87311-12-10	3/4"	16	10	48	38.1	6.73
Y87311-12-12	3/4"	19	12	48	38.1	6.73
Y87311-12-16	3/4"	25	16	49	38.1	6.73
Y87311-16-12	1"	19	12	51	44.4	8
Y87311-16-16	1"	25	16	52	44.4	8
Y87311-16-20	1"	32	20	53	44.4	8
Y87311-20-16	1.1/4"	25	16	57	50.8	8
Y87311-20-20	1.1/4"	32	20	58	50.8	8
Y87311-24-20	1.1/2"	32	20	68	60.3	8
Y87311-24-24	1.1/2"	38	24	68	60.3	8
Y87311-32-24	2"	38	24	66	71.4	9.53
Y87311-32-32	2"	51	32	66	71.4	9.53

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为Y87312-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is Y87312-XX-XX.



Y87341



45°SAE ? 3000 PSI 61型
45°SAE Flange 3000 PSI Code 61 ISO 12151-3-SAE J518

代号 PART NO.	螺纹T THREAD T	软管 HOSE BORE		尺寸 DIMENSIONS			
		公称内径DN	标号 DASH	L	H	D	L1
Y87341-08-08	1/2"	13	08	50.3	19	30.2	6.73
Y87341-12-08	3/4"	13	08	57.3	26	38.1	6.73
Y87341-12-10	3/4"	16	10	65.2	26	38.1	6.73
Y87341-12-12	3/4"	19	12	68.7	26	38.1	6.73
Y87341-12-16	3/4"	25	16	79.4	30	38.1	6.73
Y87341-16-12	1"	19	12	74.7	32	44.4	8
Y87341-16-16	1"	25	16	81.4	32	44.4	8
Y87341-16-20	1"	32	20	95.8	35	44.4	8
Y87341-20-16	1.1/4"	25	16	87.4	38	50.8	8
Y87341-20-20	1.1/4"	32	20	98.8	38	50.8	8
Y87341-24-20	1.1/2"	32	20	104.75	44	60.3	8
Y87341-24-24	1.1/2"	38	24	115.1	44	60.3	8
Y87341-32-24	2"	38	24	127.1	56	71.4	9.53
Y87341-32-32	2"	51	32	141	56	71.4	9.53

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为Y87342-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is Y87342-XX-XX.

Y87611




SAE ? 6000 PSI 62型
SAE Flange 6000 PSI Code 62 ISO 12151-3-SAE J518

代号 PART NO.	法兰型号 FLANGE SIZE	软管 HOSE BORE		尺寸 DIMENSIONS		
		公称内径DN	标号 DASH	L	D	L1
Y87611-08-08	1/2"	13	08	47	31.7	7.75
Y87611-12-10	3/4"	16	10	51	41.3	8.76
Y87611-12-12	3/4"	19	12	51	41.3	8.76
Y87611-16-12	1"	19	12	56	47.6	9.53
Y87611-16-16	1"	25	16	57	47.6	9.53
Y87611-16-20	1"	32	20	58	47.6	9.53
Y87611-20-16	1.1/4"	25	16	65	54	10.29
Y87611-20-20	1.1/4"	32	20	66	54	10.29
Y87611-24-20	1.1/2"	32	20	75	63.5	12.57
Y87611-24-24	1.1/2"	38	24	75	63.5	12.57
Y87611-32-24	2"	38	24	85	79.4	12.57
Y87611-32-32	2"	51	32	85	79.4	12.57

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为Y87612-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is Y87612-XX-XX.

Y87391



90°SAE ? 3000 PSI 61型
90°SAE Flange 3000 PSI Code 61 ISO 12151-3-SAE J518

代号 PART NO.	螺纹T THREAD T	软管 HOSE BORE		尺寸 DIMENSIONS			
		公称内径DN	标号 DASH	L	H	D	L1
Y87391-08-08	1/2"	13	08	44.5	40	30.2	6.73
Y87391-12-08	3/4"	13	08	44.5	58	38.1	6.73
Y87391-12-10	3/4"	16	10	55	58	38.1	6.73
Y87391-12-12	3/4"	19	12	62	58	38.1	6.73
Y87391-12-16	3/4"	25	16	74	68	38.1	6.73
Y87391-16-12	1"	19	12	62	70	44.4	8
Y87391-16-16	1"	25	16	74	70	44.4	8
Y87391-16-20	1"	32	20	91.5	82	44.4	8
Y87391-20-16	1.1/4"	25	16	74	90	50.8	8
Y87391-20-20	1.1/4"	32	20	91.5	90	50.8	8
Y87391-24-20	1.1/2"	32	20	91.5	104	60.3	8
Y87391-24-24	1.1/2"	38	24	108	104	60.3	8
Y87391-32-24	2"	38	24	108	138	71.4	9.53
Y87391-32-32	2"	51	32	133.8	138	71.4	9.53

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为Y87392-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is Y87392-XX-XX.

Y87641



45°SAE ? 6000 PSI 62型
45°SAE Flange 6000 PSI Code 62 ISO 12151-3-SAE J518


代号 PART NO.	法兰型号 FLANGE SIZE	软管 HOSE BORE		尺寸 DIMENSIONS			
		公称内径DN	标号 DASH	L	H	D	L1
Y87641-08-08	1/2"	13	08	50	31.9	31.7	7.75
Y87641-12-10	3/4"	16	10	65	41.3	41.3	8.76
Y87641-12-12	3/4"	19	12	68	41.3	41.3	8.76
Y87641-16-12	1"	19	12	74	47.6	47.6	9.53
Y87641-16-16	1"	25	16	81	47.6	47.6	9.53
Y87641-16-20	1"	32	20	95	47.6	47.6	9.53
Y87641-20-16	1.1/4"	25	16	98	54	54	10.29
Y87641-20-20	1.1/4"	32	20	104	54	54	10.29
Y87641-24-20	1.1/2"	32	20	115	63.5	63.5	12.57
Y87641-24-24	1.1/2"	38	24	127	63.5	63.5	12.57
Y87641-32-24	2"	38	24	141	79.4	79.4	12.57
Y87641-32-32	2"	51	32	141	79.4	79.4	12.57

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为Y87642-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is Y87642-XX-XX.



Y87691

90°SAE ? 兰 6000 PSI 62型
90°SAE Flange 6000 PSI Code 62 ISO 12151-3- SAE J518



代号 PART NO.	法兰型号 FLANGE SIZE		软管 HOSE BORE		尺寸 DIMENSIONS			
	公称内径DN	标号 DASH	L	H	D	L1		
Y 87691-08-08	1/2"	13	08	44.5	40	31.7	7.75	
Y 87691-12-10	3/4"	16	10	55	58	41.3	8.76	
Y 87691-12-12	3/4"	19	12	62	58	41.3	8.76	
Y 87691-16-12	1"	19	12	62	70	47.6	9.53	
Y 87691-16-16	1"	25	16	74	70	47.6	9.53	
Y 87691-16-20	1"	32	20	91.5	82	47.6	9.53	
Y 87691-20-16	1.1/4"	25	16	74	90	54	10.29	
Y 87691-20-20	1.1/4"	32	20	91.5	90	54	10.29	
Y 87691-24-20	1.1/2"	32	20	91.5	104	63.5	12.57	
Y 87691-24-24	1.1/2"	38	24	108	104	63.5	12.57	
Y 87691-32-24	2"	38	24	108	138	79.4	12.57	
Y 87691-32-32	2"	51	32	133.8	138	79.4	12.57	

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为Y87692-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is Y87692-XX-XX.

Y60011

矿用快速软管接头
MT Staple Ockclip Fastener Male




代号 PART NO.	规格 SIZE	尺寸 DIMENSIONS		
		A1	D1	D2
Y 60011-04-04D	1/4"	36.5	15	10
Y 60011-05-05D	5/16"	36.5	20	14
Y 60011-06-06D	3/8"	36.5	20	14
Y 60011-08-08D	1/2"	37	24	18
Y 60011-10-10D	5/8"	38	26	21
Y 60011-12-12D	3/4"	38	29	24
Y 60011-16-16D	1"	44	39	31
Y 60011-20-20D	1.1/4"	46	46	38
Y 60011-24-24D	1.1/2"	51	55	47
Y 60011-32-32D	2"	51	64	56
Y 60011-20-20G	1.1/4"	66	45.5	38
Y 60011-24-24G	1.1/2"	72	54.5	44
Y 60011-32-32G	2"	72	63.5	50
Y 60011-04-04K	1/4"	33.5	15	11
Y 60011-05-05K	5/16"	33.5	18	13
Y 60011-06-06K	3/8"	33.5	18	15
Y 60011-08-08K	1/2"	33.5	22	18
Y 60011-10-10K	5/8"	38	25	20
Y 60011-12-12K	3/4"	40	28	24
Y 60011-16-16K	1"	40	35	30
Y 60011-20-20K	1.1/4"	42	42	38

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为Y60012-XX-XX。3、D:SAE通用类；G: SAE高压类；K：煤标。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is Y60012-XX-XX. 3.D:SAEGeneral; G: SAEHigh pressure; K:MT

Y70011

公制铰接体
Metric Banjo DIN 7642

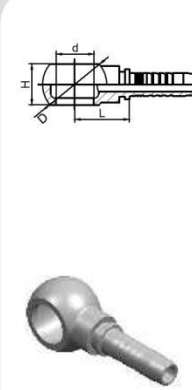


代号 PART NO.	螺栓 BOLT	软管 HOSE BORE		尺寸 DIMENSIONS			
		公称内径DN	标号 DASH	L	d	D	H
Y70011-10-03	M10X1	5	03	17	10.1	17	10
Y70011-10-04	M10X1	6	04	19.5	10.1	17	10
Y70011-12-04	M12X1.5	6	04	21	12.1	20	12
Y70011-12-05	M12X1.5	8	05	22.5	12.1	22	12
Y70011-12-06	M12X1.5	10	06	21	12.1	20	12
Y70011-14-04	M14X1.5	6	04	24.5	14.1	24	14
Y70011-14-05	M14X1.5	8	05	21	14.1	24	14
Y70011-14-06	M14X1.5	10	06	24.5	14.1	24	14
Y70011-16-04	M16X1.5	6	04	24	16.1	28	18
Y70011-16-05	M16X1.5	8	05	24	16.1	28	18
Y70011-16-06	M16X1.5	10	06	24	16.1	28	18
Y70011-18-04	M18X1.5	6	04	30.5	18.1	32	20
Y70011-18-05	M18X1.5	8	05	24.5	18.1	32	20
Y70011-18-06	M18X1.5	10	06	24.5	18.1	32	20
Y70011-18-08	M18X1.5	13	08	25	18.1	32	20
Y70011-22-06	M22X1.5	10	06	27	22.1	35	22
Y70011-22-08	M22X1.5	13	08	27.5	22.1	35	22
Y70011-22-10	M22X1.5	16	10	28	22.1	39	22
Y70011-26-12	M26X1.5	19	12	36.5	26.1	45	29
Y70011-30-16	M30X1.5	25	16	40	30.1	54	36
Y70011-30-20	M30X1.5	32	20	41	30.1	54	36

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为Y70012-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is Y70012-XX-XX.

Y72011

英制铰接体
BSP Banjo




代号 PART NO.	螺栓 BOLT	软管 HOSE BORE		尺寸 DIMENSIONS			
		公称内径DN	标号 DASH	L	d	D	H
Y72011-04-04	G1/4" X19	6	04	19.5	13.3	24	14
Y72011-04-05	G1/4" X19	8	05	19.5	13.3	24	14
Y72011-04-06	G1/4" X19	10	06	22	13.3	24	14
Y72011-06-04	G3/8" X19	6	04	22	16.7	29	18
Y72011-06-05	G3/8" X19	8	05	22	16.7	29	20
Y72011-06-06	G3/8" X19	10	06	22	16.7	29	20
Y72011-06-08	G3/8" X19	13	08	23.5	16.7	28	20
Y72011-08-05	G1/2" X14	8	05	27.5	21	35	22
Y72011-08-06	G1/2" X14	10	06	27.5	21.2	35	22
Y72011-08-08	G1/2" X14	13	08	27.5	21.2	36	25
Y72011-08-10	G1/2" X14	16	10	28.5	21.2	36	25
Y72011-10-10	G5/8" X14	16	10	28	23	40	27
Y72011-12-10	G3/4" X14	16	10	32	26.5	48	31
Y72011-12-12	G3/4" X14	19	12	32	26.5	48	31
Y72011-16-08	G1" X11	13	08	40	33.3	48	36
Y72011-16-12	G1" X11	19	12	40	33.3	54	36
Y72011-16-16	G1" X11	25	16	41	33.3	54	36

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为Y72012-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is Y72012-XX-XX.




Y700M

公制铰接螺栓
Metric Bolt DIN 7643

代号 PART NO.	螺纹T THREAD T	尺寸 DIMENSIONS		
		L	L1	S1
Y700M-10	M10X1	19.5	6	14
Y700M-12	M12X1.5	24.5	6	17
Y700M-14	M14X1.5	26	6	19
Y700M-16	M16X1.5	28.5	6	22
Y700M-18	M18X1.5	32.5	6	24
Y700M-22	M22X1.5	39	8	27
Y700M-26	M26X1.5	46	10	32
Y700M-30	M30X1.5	51	10	36


注：配S70011使用。Note: USE for Y70011 series

Y20513-T

公制内螺纹24°锥 带型圈重系列
Metric Female 24° Cone O-Ring H.T. ISO 12151-2-DIN 3865

代号 PART NO.	螺纹T THREAD T	软管 HOSE BORE		管子外径 TUBE O. D	尺寸 DIMENSIONS		
		公称内径DN	标号 DASH		L	H	S1
Y20513-36-12T	M36X2	19	12	25	33.5		46
Y20513-42-16T	M42X2	25	16	30	37.5		50
Y20513-52-20T	M52X2	32	20	38	45.5		60


Y720B

英制铰接螺栓
BSP Bolt

代号 PART NO.	螺纹T THREAD T	尺寸 DIMENSIONS		
		L	L1	S1
Y720B-02	G1/8" X28	29.5	4.8	14
Y720B-04	G1/4" X19	28.5	6	19
Y720B-06	G3/8" X19	38.5	7	22
Y720B-08	G1/2" X14	44	8.5	27
Y720B-10	G5/8" X14	48.5	10	30
Y720B-12	G3/4" X14	46	10	32
Y720B-16	G1" X11	68.5	13	41

注：配S72011使用。Note: USE for Y72011 series

Y20543-T

45°公制内螺纹24°锥 带型圈重系列
45°Metric Female 24° Cone O-Ring H.T. ISO 12151-2-DIN 3865

代号 PART NO.	螺纹T THREAD T	软管 HOSE BORE		管子外径 TUBE O. D	尺寸 DIMENSIONS		
		公称内径DN	标号 DASH		L	H	S1
Y20543-36-12T	M36X2	19	12	25	80.2	30.5	46
Y20543-42-16T	M42X2	25	16	30	85.4	35.5	50
Y20543-52-20T	M52X2	32	20	38	110.75	42	60


Y90011

双面连接芯
Double Connector

代号 PART NO.	软管 HOSE BORE		尺寸 DIMENSIONS		
	公称内径DN	标号 DASH	L	H	S1
Y90011-04	6	04	12		
Y90011-05	8	05	12		
Y90011-06	10	06	12		
Y90011-08	13	08	13		
Y90011-10	16	10	16		
Y90011-12	19	12	16		
Y90011-16	25	16	23		
Y90011-20	32	20	26		
Y90011-24	38	24	26		
Y90011-32	51	32	26		


注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为Y90012-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is Y90012-XX-XX.

Y20593-T

90°公制内螺纹24°锥 带型圈重系列
90°Metric Female 24° Cone O-Ring H.T. ISO 12151-2-DIN 3865


代号 PART NO.	螺纹T THREAD T	软管 HOSE BORE		管子外径 TUBE O. D	尺寸 DIMENSIONS		
		公称内径DN	标号 DASH		L	H	S1
Y20593-36-12T	M36X2	19	12	25	69	59	46
Y20593-42-16T	M42X2	25	16	30	74.5	70	50
Y20593-50-20T	M52X2	32	20	38	99.5	87	60

Y22613-OR

 英管内螺纹60°外锥面带O型圈
BSP Female 60°O-Ring Cone ISO 12151-6



代号 PART NO.	螺纹T	软管 HOSE BORE		尺寸 DIMENSIONS		
	THREAD T	公称内径DN	标号 DASH	L	H	S1
Y22613-12-12OR	G3/4"X14	19	12	26.5		32
Y22613-16-16OR	G1"X11	25	16	30.4		41
Y22613-20-20OR	G1.1/4"X11	32	20	35.8		50
Y22613-24-24OR	G1.1/2"X11	38	24	36.7		55

Y26713

 美制JIC内螺纹74°内锥面
JIC Female 74° Cone Seat ISO 12151-5 -SAE J514



代号 PART NO.	螺纹T	软管 HOSE BORE		尺寸 DIMENSIONS		
	THREAD T	公称内径DN	标号 DASH	L	H	S1
Y26713-12-12	1.1/16" X12	19	12	26.5		32
Y26713-16-16	1.5/16" X12	25	16	29.4		41
Y26713-20-20	1.5/8" X12	32	20	32.3		50
Y26713-24-24	1.7/8" X12	38	24	35.2		60
Y26713-32-32	2.1/2" X12	50	32	34.5		75

Y22643-OR

 45°英管内螺纹60°外锥面 带型圈
45°BSP Female 60°O-Ring Cone ISO 12151-6



代号 PART NO.	螺纹T	软管 HOSE BORE		尺寸 DIMENSIONS		
	THREAD T	公称内径DN	标号 DASH	L	H	S1
Y22643-12-12OR	G3/4"X14	19	12	78.7	29	32
Y22643-16-16OR	G1"X11	25	16	84.9	35	41
Y22643-20-20OR	G1.1/4"X11	32	20	108.8	40	50
Y22643-24-24OR	G1.1/2"X11	38	24	123.1	50	55

Y26743

 45 美制JIC内螺纹74°内锥面
45 JIC Female 74° Cone Seat ISO 12151-5 -SAE J514



代号 PART NO.	螺纹T	软管 HOSE BORE		尺寸 DIMENSIONS		
	THREAD T	公称内径DN	标号 DASH	L	H	S1
Y26743-12-12	1.1/16" X12	19	12	70.7	21	32
Y26743-16-16	1.5/16" X12	25	16	73.9	24	41
Y26743-20-20	1.5/8" X12	32	20	100.8	32	50
Y26743-24-24	1.7/8" X12	38	24	115.1	42	60
Y26743-32-32	2.1/2" X12	51	32	136	51.5	75

Y22693-OR

 90°英管内螺纹60°外锥面 带型圈
90°BSP Female 60°O-Ring Cone ISO 12151-6


代号 PART NO.	螺纹T	软管 HOSE BORE		尺寸 DIMENSIONS		
	THREAD T	公称内径DN	标号 DASH	L	H	S1
Y22693-12-12OR	G3/4"X14	19	12	69	58	32
Y22693-16-16OR	G1"X11	25	16	74.5	70	41
Y22693-20-20OR	G1.1/4"X11	32	20	99.5	85	50
Y22693-24-24OR	G1.1/2"X11	38	24	110	100	55

Y26793


 90 美制JIC内螺纹74°内锥面
90° JIC Female 74° Cone Seat ISO 12151-5 -SAE J514


代号 PART NO.	螺纹T	软管 HOSE BORE		尺寸 DIMENSIONS		
	THREAD T	公称内径DN	标号 DASH	L	H	S1
Y26793-12-12	1.1/16" X12	19	12	69	58	32
Y26793-16-16	1.5/16" X12	25	16	74.5	71	41
Y26793-20-20	1.5/8" X12	32	20	99.5	78	50
Y26793-24-24	1.7/8" X12	38	24	110	86	60
Y26793-32-32	2.1/2" X12	50	32	133.3	140	75



Y14213


美制ORFS外螺纹平面O型圈密封
ORFS Male O-Ring Seal ISO 12151-1 -SAE J1453



代号 PART NO.	螺纹T THREAD T	软管 HOSE BORE		尺寸 DIMENSIONS		
		公称内径DN	标号 DASH	L	H	S1
Y14213-12-12	1.3/16" X12	19	12	38.5		32
Y14213-16-16	1.7/16" X12	25	16	40.5		38
Y14213-20-20	1.11/16" X12	32	20	42.5		46
Y14213-24-24	2" X12	24	24	45.5		55

Y24293


90° 美制ORFS内螺纹平面
90°Elbow ORFS Female Flat Seat ISO 12151-1- SAE J516



代号 PART NO.	螺纹T THREAD T	软管 HOSE BORE		尺寸 DIMENSIONS		
		公称内径DN	标号 DASH	L	H	S1
Y24293-12-12	1.3/16" X12	19	12	69	58	36
Y24293-16-16	1.7/16" X12	25	16	74.5	71	41
Y24293-20-20	1.11/16" X12	32	20	99.5	78	50
Y24293-24-24	2" X12	38	24	110	86	60

Y24213


美制ORFS内螺纹平面
ORFS Female Flat Seat ISO 12151-1- SAE J516



代号 PART NO.	螺纹T THREAD T	软管 HOSE BORE		尺寸 DIMENSIONS		
		公称内径DN	标号 DASH	L	H	S1
Y24213-12-12	1.3/16" X12	19	12	41		36
Y24213-16-16	1.7/16" X12	25	16	44.4		41
Y24213-20-20	1.11/16" X12	32	20	47.8		50
Y24213-24-24	2" X12	38	24	48.2		60

Y87313


SAE法兰 3000PSI 61型
SAE Flange 3000 PSI Code 61
ISO 12151-3- SAE J518



代号 PART NO.	法兰型号 FLANGE SIZE	软管 HOSE BORE		尺寸 DIMENSIONS		
		公称内径DN	标号 DASH	L	D	L1
Y87313-12-12	3/4"	19	12	50	38.1	6.73
Y87313-16-12	1"	19	12	53	44.4	8
Y87313-16-16	1"	25	16	54	44.4	8
Y87313-20-16	1.1/4"	25	16	59	50.8	8
Y87313-20-20	1.1/4"	32	20	60	50.8	8
Y87313-24-20	1.1/2"	32	20	70	60.3	8
Y87313-24-24	1.1/2"	38	24	70	60.3	8
Y87313-32-24	2"	38	24	67.5	71.4	9.53
Y87313-32-32	2"	51	32	64.5	71.4	9.53

Y24243


45°美制ORFS内螺纹平面
45°Elbow ORFS Female Flat Seat ISO 12151-1- SAE J516



代号 PART NO.	螺纹T THREAD T	软管 HOSE BORE		尺寸 DIMENSIONS			
		公称内径DN	标号 DASH	L	H	D	S1
Y24243-12-12	1.3/16" X12	19	12	70.7	21		36
Y24243-16-16	1.7/16" X12	25	16	73.9	24		41
Y24243-20-20	1.11/16" X12	32	20	100.8	32		50
Y24243-24-24	2" X12	38	24	115.1	42		60

Y87343

45°弯 SAE法兰 3000PSI 61型
45° SAE Flange 3000 PSI Code 61
ISO 12151-3- SAE J518



代号 PART NO.	法兰型号 FLANGE SIZE	软管 HOSE BORE		尺寸 DIMENSIONS			
		公称内径DN	标号 DASH	L	H	D	L1
Y87343-12-12	3/4"	19	12	75.7	26	38.1	6.73
Y87343-16-12	1"	19	12	81.7	32	44.4	8
Y87343-16-16	1"	25	16	81.9	32	44.4	8
Y87343-20-16	1.1/4"	25	16	87.9	38	50.8	8
Y87343-20-20	1.1/4"	32	20	106.8	38	50.8	8
Y87343-24-20	1.1/2"	32	20	112.8	44	60.3	8
Y87343-24-24	1.1/2"	38	24	117.1	44	60.3	8
Y87343-32-24	2"	38	24	129.1	56	71.4	9.53
Y87343-32-32	2"	51	32	140.5	56	71.4	9.53



Y87393


90°SAE 法兰 3000 PSI 61型
90°SAE Flange 3000 PSI Code 61 ISO 12151-3- SAE J518



代号 PART NO.	法兰型号 FLANGE SIZE	软管 HOSE BORE		尺寸 DIMENSIONS			
		公称内径DN	标号 DASH	L	H	D	L1
Y87393-12-12	3/4"	19	12	69	58	38.1	6.73
Y87393-16-12	1"	19	12	69	70	44.4	8
Y87393-16-16	1"	25	16	74.5	70	44.4	8
Y87393-20-16	1.1/4"	25	16	74.5	90	50.8	8
Y87393-20-20	1.1/4"	32	20	99.5	90	50.8	8
Y87393-24-20	1.1/2"	32	20	99.5	104	60.3	8
Y87393-24-24	1.1/2"	38	24	110	104	60.3	8
Y87393-32-24	2"	38	24	110	138	71.4	9.53
Y87393-32-32	2"	51	32	133.3	138	71.4	9.53

Y87693

90°SAE 法兰 6000 PSI 62型
90°SAE Flange 6000 PSI Code 62 ISO 12151-3- SAE J518



代号 PART NO.	法兰型号 FLANGE SIZE	软管 HOSE BORE		尺寸 DIMENSIONS			
		公称内径DN	标号 DASH	L	H	D	L1
Y87693-12-12	3/4"	19	12	69	58	41.3	8.76
Y87693-16-12	1"	19	12	69	70	47.6	9.53
Y87693-16-16	1"	25	16	74.5	70	47.6	9.53
Y87693-20-16	1.1/4"	25	16	74.5	90	54	10.29
Y87693-20-20	1.1/4"	32	20	99.5	90	54	10.29
Y87693-24-20	1.1/2"	32	20	99.5	104	63.5	12.57
Y87693-24-24	1.1/2"	38	24	110	104	63.5	12.57
Y87693-32-24	2"	38	24	110	138	79.4	12.57
Y87693-32-32	2"	51	32	133.3	138	79.4	12.57

Y87613


SAE 法兰 6000 PSI 62型
SAE Flange 6000 PSI Code 62 ISO 12151-3- SAE J518



代号 PART NO.	法兰型号 FLANGE SIZE	软管 HOSE BORE		尺寸 DIMENSIONS		
		公称内径DN	标号 DASH	L	D	L1
Y87613-12-12	3/4"	19	12	52.5	41.3	8.76
Y87613-16-12	1"	19	12	55.5	47.6	9.53
Y87613-16-16	1"	25	16	58.5	47.6	9.53
Y87613-20-16	1.1/4"	25	16	66	54	10.29
Y87613-20-20	1.1/4"	32	20	67.5	54	10.29
Y87613-24-20	1.1/2"	32	20	76	63.5	12.57
Y87613-24-24	1.1/2"	38	24	77	63.5	12.57
Y87613-32-24	2"	38	24	84	79.4	12.57
Y87613-32-32	2"	51	32	84	79.4	12.57

Y87913


SAE 法兰 9000 PSI
SAE Flange 9000 PSI



代号 PART NO.	法兰型号 FLANGE SIZE	软管 HOSE BORE		尺寸 DIMENSIONS		
		公称内径DN	标号 DASH	L	D	L1
Y87913-12-12	3/4"	19	12	58	41.3	14.3
Y87913-16-12	1"	19	12	62.5	47.6	14.3
Y87913-16-16	1"	25	16	63.5	47.6	14.3
Y87913-20-16	1.1/4"	25	16	70.5	54	14.3
Y87913-20-20	1.1/4"	32	20	71.5	54	14.3
Y87913-24-20	1.1/2"	32	20	78.5	63.5	14.3
Y87913-24-24	1.1/2"	38	24	79	63.5	14.3

Y87643

45°SAE 法兰 6000 PSI 62型
45°SAE Flange 6000 PSI Code 62 ISO 12151-3- SAE J518



代号 PART NO.	法兰型号 FLANGE SIZE	软管 HOSE BORE		尺寸 DIMENSIONS			
		公称内径DN	标号 DASH	L	H	D	L1
Y87643-12-12	3/4"	19	12	75.7	26	41.3	8.76
Y87643-16-12	1"	19	12	81.7	32	47.6	9.53
Y87643-16-16	1"	25	16	81.9	32	47.6	9.53
Y87643-20-16	1.1/4"	25	16	87.9	38	54	10.29
Y87643-20-20	1.1/4"	32	20	106.8	38	54	10.29
Y87643-24-20	1.1/2"	32	20	112.8	44	63.5	12.57
Y87643-24-24	1.1/2"	38	24	117.1	44	63.5	12.57
Y87643-32-24	2"	38	24	129.1	56	79.4	12.57
Y87643-32-32	2"	51	32	140.5	56	79.4	12.57

Y87943

45°SAE 法兰 9000 PSI
45°SAE Flange 9000 PSI




代号 PART NO.	法兰型号 FLANGE SIZE	软管 HOSE BORE		尺寸 DIMENSIONS			
		公称内径DN	标号 DASH	L	H	D	L1
Y87943-12-12	3/4"	19	12	80	35	41.3	14.3
Y87943-16-12	1"	19	12	81.5	36.5	47.6	14.3
Y87943-16-16	1"	25	16	93	38	47.6	14.3
Y87943-20-16	1.1/4"	25	16	95.5	40	54	14.3
Y87943-20-20	1.1/4"	32	20	109	44.5	54	14.3
Y87943-24-20	1.1/2"	32	20	111	46.5	63.5	14.3
Y87943-24-24	1.1/2"	38	24	127	51.5	63.5	14.3



Y87993


90°SAE 法兰 9000 PSI
90°SAE Flange 9000 PSI



代号 PART NO.	法兰型号 FLANGE SIZE	软管 HOSE BORE		尺寸 DIMENSIONS			
		公称内径 DN	标号 DASH	L	H	D	L1
Y87993-12-12	3/4"	19	12	71	69	41.3	14.3
Y87993-16-12	1"	19	12	71	71	47.6	14.3
Y87993-16-16	1"	25	16	82	78	47.6	14.3
Y87993-20-16	1.1/4"	25	16	82	81	54	14.3
Y87993-20-20	1.1/4"	32	20	99.5	93.5	54	14.3
Y87993-24-20	1.1/2"	32	20	99.5	96.5	63.5	14.3
Y87993-24-24	1.1/2"	38	24	118	106	63.5	14.3

Y15618-R5


美制布锥管螺纹
NPT Male



代号 PART NO.	螺纹 T THREAD T	软管 HOSE BORE		尺寸 DIMENSIONS	
		标号 DASH		S1	
Y15618-02-04(R5)	Z1/8"X27	04		12	
Y15618-04-04(R5)	Z1/4"X18	04		17	
Y15618-04-06(R5)	Z1/4"X18	06		17	
Y15618-06-05(R5)	Z3/8"X18	05		19	
Y15618-06-06(R5)	Z3/8"X18	06		19	
Y15618-08-08(R5)	Z1/2"X14	08		22	
Y15618-12-10(R5)	Z3/4"X14	10		30	
Y15618-12-12(R5)	Z3/4"X14	12		30	
Y15618-16-16(R5)	Z1"X11.5	16		36	
Y15618-20-20(R5)	Z1.1/4"X11.5	20		46	
Y15618-24-24(R5)	Z1.1/2"X11.5	24		50	
Y15618-32-32(R5)	Z2"X11.5	32		65	

Y00518


SAE 100 R5 软管可拆式套筒
Ferrule For SAE 100 R5 Hose



代号 PART NO.	软管 HOSE BORE		尺寸 DIMENSIONS	
	标号 DASH		L	S
Y00518-04	04		28	17
Y00518-05	05		30.5	19
Y00518-06	06		33	22
Y00518-08	08		42	24
Y00518-10	10		45.5	30
Y00518-12	12		53.5	32
Y00518-16	16		42	36
Y00518-20	20		44.5	46
Y00518-24	24		47	50
Y00518-32	32		57	65

Y16718-R5


美制 JIC 外螺纹 74°外锥面
JIC Male 74° Cone



代号 PART NO.	螺纹 T THREAD T	软管 HOSE BORE		尺寸 DIMENSIONS	
		标号 DASH		S1	
Y16718-04-04(R5)	7/16"X20	04		12	
Y16718-06-05(R5)	9/16"X18	05		17	
Y16718-06-06(R5)	9/16"X18	06		17	
Y16718-08-06(R5)	3/4"X16	06		22	
Y16718-08-08(R5)	3/4"X16	08		22	
Y16718-10-10(R5)	7/8"X14	10		24	
Y16718-12-12(R5)	1.1/16"X12	12		30	
Y16718-16-16(R5)	1.5/16"X12	16		36	
Y16718-20-20(R5)	1.5/8"X12	20		46	
Y16718-24-24(R5)	1.7/8"X12	24		50	

Y12618-R5


英制外螺纹60°内锥面
BSP Male 60° Cone Seat



代号 PART NO.	螺纹 T THREAD T	软管 HOSE BORE		尺寸 DIMENSIONS	
		公称内径 DN	标号 DASH	S1	
Y12618-04-04(R5)	G1/4"X19	5	4	14	
Y12618-06-05(R5)	G3/8"X19	6	5	17	
Y12618-06-06(R5)	G3/8"X19	8	6	17	
Y12618-08-08(R5)	G1/2"X14	11	8	22	
Y12618-10-10(R5)	G5/8"X14	13	10	24	
Y12618-12-12(R5)	G3/4"X14	16	12	27	
Y12618-16-16(R5)	G1"X11	22	16	36	
Y12618-20-20(R5)	G1.1/4"X11	28	20	46	
Y12618-24-24(R5)	G1.1/2"X11	35	24	50	
Y12618-32-32(R5)	G2"X11	46	32	60	

Y17818-R5

美制 SAE 外螺纹 90°外锥面
SAE Male 90° Cone



代号 PART NO.	螺纹 T THREAD T	软管 HOSE BORE		尺寸 DIMENSIONS	
		标号 DASH		S1	
Y17818-06-06(R5)	7/16"X20	06		17	
Y17818-08-08(R5)	9/16"X18	08		22	
Y17818-12-12(R5)	9/16"X18	12		30	



Y20418D-R5


公制内螺纹24°锥带O型圈轻型系列
METRIC Female 24° Cone O-ring L.T.



代号 PART NO.	螺纹 T THREAD T	软管 HOSE BORE		管子外径 D TUBE O.D	尺寸 DIMENSIONS		
		公称内径 DN	标号 DASH		C	S1	S2
Y20418D-14-04(R5)	M14X1.5	5	4	8	1.4	12	17
Y20418D-16-05(R5)	M16X1.5	6	5	10	2.1	14	19
Y20418D-18-06(R5)	M18X1.5	8	6	12	1.8	17	22
Y20418D-22-08(R5)	M22X4.5	11	8	15	3	19	27
Y20418D-26-10(R5)	M26X1.5	13	10	18	2.1	27	32
Y20418D-30-12(R5)	M30X2	16	12	22	3.8	30	36
Y20418D-36-16(R5)	M36X2	22	16	28	4.5	36	41
Y20418D-45-16(R5)	M45X2	22	16	35	4	41	50
Y20418D-45-20(R5)	M45X2	28	20	35	4	41	50
Y20418D-52-24(R5)	M52X2	35	24	42	4	50	60

Y20518-R5


公制内螺纹24°锥带O型圈重系列
METRIC Female 24° Cone O-ring H.T.



代号 PART NO.	螺纹 T THREAD T	软管 HOSE BORE		管子外径 D TUBE O.D	尺寸 DIMENSIONS		
		公称内径 DN	标号 DASH		C	S1	S2
Y20518D-16-04(R5)	M14X1.5	5	04	8	1.8	14	19
Y20518D-16-05(R5)	M16X1.5	6	05	8	1.8	14	19
Y20518D-18-04(R5)	M18X1.5	5	04	10	1.5	17	22
Y20518D-18-06(R5)	M18X1.5	8	06	10	1.5	17	22
Y20518D-20-06(R5)	M20X1.5	8	06	12	2.5	17	24
Y20518D-22-06(R5)	M22X1.5	8	06	14	3	19	27
Y20518D-24-08(R5)	M24X1.5	11	08	16	3	22	30
Y20518D-30-10(R5)	M30X2	13	10	20	2.5	27	36
Y20518D-30-12(R5)	M30X2	16	12	20	2.5	27	36
Y20518D-36-12(R5)	M36X2	16	12	25	3.2	36	41
Y20518D-36-16(R5)	M36X2	22	16	25	3.2	36	41
Y20518D-42-16(R5)	M42X2	22	16	30	3.9	41	50
Y20518D-42-20(R5)	M42X2	28	20	30	3.9	41	50
Y20518D-52-20(R5)	M52X2	28	20	38	4.5	50	60
Y20518D-52-24(R5)	M52X2	35	24	38	4.5	50	60

Y21698D

90°美制 NPSM 内螺纹 60°外锥面
90°NPSM Female 60° Cone



代号 PART NO.	螺纹 T THREAD T	软管 HOSE BORE		管子外径 D TUBE O.D	尺寸 DIMENSIONS		
		公称内径 DN	标号 DASH		B	H	S1
Y21698D-04-04(R5)	1/4"X18	6	04	4.6	40.5	14	19
Y21698D-06-05(R5)	3/8"X18	8	05	6	43	14	22
Y21698D-06-06(R5)	3/8"X18	10	06	6	45.3	17	22
Y21698D-08-08(R5)	1/2"X14	12	08	7.5	53.2	19	27
Y21698D-12-10(R5)	3/4"X14	16	10	8.9	53.5	24	32
Y21698D-12-12(R5)	3/4"X14	20	12	8.9	69.1	27	32
Y21698D-16-16(R5)	1"X11.5	25	16	10.5	75	32	41
Y21698D-20-20(R5)	1.1/4"X11.5	32	20	11.2	86	41	50
Y21698D-24-24(R5)	1.1/2"X11.5	40	24	11.2	101.5	46	55
Y21698D-32-32(R5)	2"X11.5	50	32	11.2	124.5	65	70

Y22618D-R5


英制内螺纹 60°外锥面
BSP Female 60° Cone



代号 PART NO.	螺纹 T THREAD T	软管 HOSE BORE		管子外径 D TUBE O.D	尺寸 DIMENSIONS		
		公称内径 DN	标号 DASH		C	S1	S2
Y22618D-04-04(R5)	G1/4"X19		04		5.5	14	19
Y22618D-06-05(R5)	G3/8"X19		05		6.3	17	22
Y22618D-06-06(R5)	G3/8"X19		06		6.3	17	22
Y22618D-08-08(R5)	G1/2"X14		08		7.5	19	27
Y22618D-10-10(R5)	G5/8"X14		10		9.5	22	30
Y22618D-12-12(R5)	G3/4"X14		12		10.9	27	32
Y22618D-16-16(R5)	G1"X11		16		11.7	32	41
Y22618D-20-20(R5)	G1.1/4"X11		20		11	41	50

Y24218D-R5


美制ORFS内螺纹平面双六角
ORFS Female Flat Double Hexagon



代号 PART NO.	螺纹 T THREAD T	软管 HOSE BORE		管子外径 D TUBE O.D	尺寸 DIMENSIONS		
		公称内径 DN	标号 DASH		C	S1	S2
Y24218D-04-04(R5)	9/16"X18		04		8.5	14	19
Y24218D-04-05(R5)	9/16"X18		05		8.5	14	19
Y24218D-06-06(R5)	11/16"X16		06		10	17	22
Y24218D-08-08(R5)	13/16"X16		08		11	19	27
Y24218D-10-10(R5)	1"X14		10		13.5	24	30
Y24218D-12-12(R5)	1.3/16"X12		12		15	30	36
Y24218D-16-16(R5)	1.7/16"X12		16		15	36	41
Y24218D-20-20(R5)	1.11/16"X12		20		15	41	50
Y24218D-24-24(R5)	2"X12		24		16	50	60

Y26718D-R5

美制 JIC 内螺纹 74°内锥面
JIC Female 74° Cone Seat




代号 PART NO.	螺纹 T THREAD T	软管 HOSE BORE		管子外径 D TUBE O.D	尺寸 DIMENSIONS		
		公称内径 DN	标号 DASH		C	S1	S2
Y26718D-04-04(R5)	7/16"X20		04		9	14	15
Y26718D-05-05(R5)	1/2"X20		05		9.5	14	17
Y26718D-06-06(R5)	9/16"X18		06		10.5	17	19
Y26718D-08-08(R5)	3/4"X16		08		11	22	24
Y26718D-10-10(R5)	7/8"X14		10		13	27	27
Y26718D-12-12(R5)	1.1/16"X12		12		15	32	32
Y26718D-16-16(R5)	1.5/16"X12		16		16	38	41
Y26718D-20-20(R5)	1.5/8"X12		20		17	41	50
Y26718D-24-24(R5)	1.7/8"X12		24		20	46	55
Y26718D-32-32(R5)	2.1/2"X12		32		23.5	65	75



Y26798D-R5

90°美制 JIC 内螺纹 74°内锥面
90°JIC Female 74° Cone Seat



代号 PART NO.	螺纹 T THREAD T	软管 HOSE BORE		尺寸 DIMENSIONS			
		公称内径 DN	标号 DASH	C	H	S1	S2
Y26798D-04-04(R5)	7/16"X20	10	04	9	33.5	14	15
Y26798D-05-05(R5)	1/2"X20	12	05	9.5	37	14	17
Y26798D-06-06(R5)	9/16"X18	14	06	10.5	39.3	17	19
Y26798D-08-08(R5)	3/4"X16	16	08	11	47.5	19	24
Y26798D-10-10(R5)	7/8"X14	18	10	13	52.5	24	27
Y26798D-12-12(R5)	1.1/16"X12	20	12	15	63.5	27	32
Y26798D-16-16(R5)	1.5/16"X12	24	16	16	70	32	41
Y26798D-20-20(R5)	1.5/8"X12	28	20	17	85	41	50
Y26798D-24-24(R5)	1.7/8"X12	32	24	20	97.5	46	55
Y26798D-32-32(R5)	2.1/2"X12	40	32	23.5	118.8	65	75

Y27818D-R5


美制SAE 内螺纹 90°内锥面
SAE Female 90° Cone Seat



代号 PART NO.	螺纹 T THREAD T	软管 HOSE BORE		尺寸 DIMENSIONS			
		公称内径 DN	标号 DASH	C	H	S1	S2
Y27818D-04-04(R5)	7/16"X20	10	04	9	14	15	
Y27818D-05-05(R5)	1/2"X20	12	05	9	14	17	
Y27818D-06-06(R5)	5/8"X18	14	06	11.3	17	22	
Y27818D-08-08(R5)	3/4"X16	16	08	11	22	24	
Y27818D-10-10(R5)	7/8"X14	18	10	13	27	27	
Y27818D-12-12(R5)	1.1/16"X14	20	12	14.3	32	32	

Y27898D-R5

90°美制 SAE 内螺纹 90°内锥面
90°SAE Female 90° Cone Seat




代号 PART NO.	螺纹 T THREAD T	软管 HOSE BORE		尺寸 DIMENSIONS			
		公称内径 DN	标号 DASH	C	H	S1	S2
Y27898D-06-06(R5)	5/8"X18	14	06	11.3	40.8	17	22
Y27898D-08-08(R5)	3/4"X16	16	08	10.5	47.5	19	24

过渡接头

Adapter




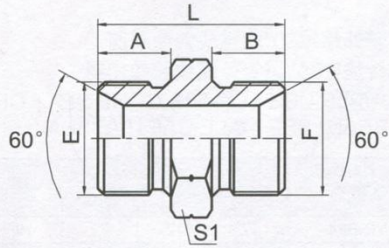

1B

英管外螺纹60°内锥或六角端面用组合垫密封
BSP MALE DOUBLE USE FOR 60°
CONE SEAT OR BONDED SEAL


代号 PART NO.	螺纹 THREAD		尺寸 DIMENSIONS			
	E	F	A	B	L	S1
Y1B-02Z	G1/8"X28	G1/8"X28	10	10	26	14
Y1B-02-04Z	G1/8"X28	G1/4"X19	10	12	28	19
Y1B-02-06Z	G1/8"X28	G3/8"X19	10	13.5	31.5	22
Y1B-02-08Z	G1/8"X28	G1/2"X14	10	16	36	27
Y1B-04Z	G1/4"X19	G1/4"X19	12	12	30	19
Y1B-04-06Z	G1/4"X19	G3/8"X19	12	13.5	33.5	22
Y1B-04-08Z	G1/4"X19	G1/2"X14	12	16	38	27
Y1B-04-10Z	G1/4"X19	G5/8"X14	12	17.5	39.5	30
Y1B-06Z	G3/8"X19	G3/8"X19	13.5	13.5	35	22
Y1B-06-08Z	G3/8"X19	G1/2"X14	13.5	16	39.5	27
Y1B-06-10Z	G3/8"X19	G5/8"X14	13.5	17.5	41	30
Y1B-06-12Z	G3/8"X19	G3/4"X14	13.5	18.5	43	32
Y1B-08Z	G1/2"X14	G1/2"X14	16	16	42	27
Y1B-08-10Z	G1/2"X14	G5/8"X14	16	17.5	43.5	30
Y1B-08-12Z	G1/2"X14	G3/4"X14	16	18.5	45.5	32
Y1B-10Z	G5/8"X14	G5/8"X14	17.5	17.5	45	30
Y1B-10-12Z	G5/8"X14	G3/4"X14	17.5	18.5	47	32
Y1B-10-16Z	G5/8"X14	G1"X11	17.5	20.5	51	41
Y1B-12Z	G3/4"X14	G3/4"X14	18.5	18.5	48	32
Y1B-12-16Z	G3/4"X14	G1"X11	18.5	20.5	52.5	41
Y1B-12-20Z	G3/4"X14	G1.1/4"X11	18.5	20.5	55	50
Y1B-16Z	G1"X11	G1"X11	20.5	20.5	54	41
Y1B-16-20Z	G1"X11	G1.1/4"X11	20.5	20.5	58	50
Y1B-16-24Z	G1"X11	G1.1/2"X11	20.5	23	60.5	55
Y1B-20Z	G1.1/4"X11	G1.1/4"X11	20.5	20.5	58	50
Y1B-20-24Z	G1.1/4"X11	G1.1/2"X11	20.5	23	60.5	55
Y1B-24Z	G1.1/2"X11	G1.1/2"X11	23	23	63	55
Y1B-24-32Z	G1.1/2"X11	G2"X11	23	25.5	66.5	70
Y1B-32Z	G2"X11	G2"X11	25.5	25.5	68	70
Y1B-40Z	G2.1/2"X11	G2.1/2"X11	32	32	81	90
Y1B-48Z	G3"X11	G3"X11	36	36	92	100

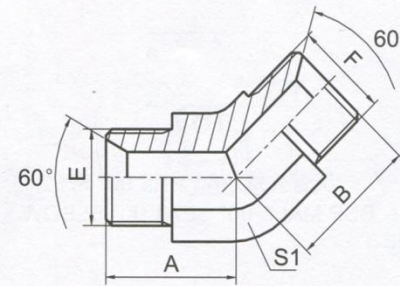

1B4

英管外螺纹60°内锥 45°弯
BSP MALE 60° SEAT 45° ELBOW


代号 PART NO.	螺纹 THREAD		尺寸 DIMENSIONS		
	E	F	A	B	S1
Y1B4-02Z	G1/8"X28	G1/8"X28	17	17	11
Y1B4-04Z	G1/4"X19	G1/4"X19	20.5	20.5	14
Y1B4-04-06Z	G1/4"X19	G3/8"X19	21	22	16
Y1B4-06Z	G3/8"X19	G3/8"X19	22	22	16
Y1B4-06-08Z	G3/8"X19	G1/2"X14	24	27	22
Y1B4-08Z	G1/2"X14	G1/2"X14	27	27	22
Y1B4-08-12Z	G1/2"X14	G3/4"X14	28.5	31	27
Y1B4-10Z	G5/8"X14	G5/8"X14	28.5	28.5	22
Y1B4-10-12Z	G5/8"X14	G3/4"X14	30	31	27
Y1B4-12Z	G3/4"X14	G3/4"X14	31	31	27
Y1B4-12-16Z	G3/4"X14	G1"X11	32.5	35	33
Y1B4-16Z	G1"X11	G1"X11	35	35	33
Y1B4-16-20Z	G1"X11	G1.1/4"X11	38.5	38.5	41
Y1B4-20Z	G1.1/4"X11	G1.1/4"X11	38.5	38.5	41
Y1B4-20-24Z	G1.1/4"X11	G1.1/2"X11	41.5	44	48
Y1B4-24Z	G1.1/2"X11	G1.1/2"X11	44	44	48
Y1B4-32Z	G2"X11	G2"X11	51	51	63



1B9

英管外螺纹60°内锥 90°弯
BSP MALE 60° SEAT 90° ELBOW


代号 PART NO.	螺纹 THREAD		尺寸 DIMENSIONS		
	E	F	A	B	S1
Y1B9-02Z	G1/8"X28	G1/8"X28	19.8	19.8	11
Y1B9-02-04Z	G1/8"X28	G1/4"X19	23	25	14
Y1B9-04Z	G1/4"X19	G1/4"X19	24.5	24.5	14
Y1B9-04-06Z	G1/4"X19	G3/8"X19	26.5	27.5	16
Y1B9-06Z	G3/8"X19	G3/8"X19	27.5	27.5	16
Y1B9-06-08Z	G3/8"X19	G1/2"X14	31	34.5	22
Y1B9-08Z	G1/2"X14	G1/2"X14	34.5	34.5	22
Y1B9-08-12Z	G1/2"X14	G3/4"X14	37.5	40	27
Y1B9-10Z	G5/8"X14	G5/8"X14	35	35	22
Y1B9-10-12Z	G5/8"X14	G3/4"X14	38	39.5	27
Y1B9-12Z	G3/4"X14	G3/4"X14	40	40	27
Y1B9-12-16Z	G3/4"X14	G1"X11	43.5	46	33
Y1B9-16Z	G1"X11	G1"X11	46	46	33
Y1B9-16-20Z	G1"X11	G1.1/4"X11	50.5	50.5	41
Y1B9-20Z	G1.1/4"X11	G1.1/4"X11	50.5	50.5	41
Y1B9-20-24Z	G1.1/4"X11	G1.1/2"X11	54.5	57.5	48
Y1B9-24Z	G1.1/2"X11	G1.1/2"X11	57.5	57.5	48
Y1B9-32Z	G2"X11	G2"X11	68	68	63



1B-WD

英管外螺纹60°内锥或六角端面
用组合垫密封 / 英管外螺纹胶垫密封
BSP MALE DOUBLE USE FOR 60° CONE SEAT OR
BONDED SEAL / BSP MALE CAPTIVE SEAL

代号 PART NO.	螺纹 THREAD		胶垫 CAPTIVE	尺寸 DIMENSIONS			
	E	F	F端	A	B	L	S1
Y 1B-04WDZ	G1/4"X19	G1/4"X19	WD-B04	12	12	32	19
Y 1B-04-06WDZ	G1/4"X19	G3/8"X19	WD-B06	12	12	34.5	22
Y1B-04-08WDZ	G1/4"X19	G1/2"X14	WD-B08	12	14	39	27
Y1B-06WDZ	G3/8"X19	G3/8"X19	WD-B06	13.5	12	34	22
Y1B-06-08WDZ	G3/8"X19	G1/2"X14	WD-B08	13.5	14	40.5	27
Y1B-08WDZ	G1/2"X14	G1/2"X14	WD-B08	16	14	43	27
Y1B-08-12WDZ	G1/2"X14	G3/4"X14	WD-B12	16	16	46	32
Y1B-12WDZ	G3/4"X14	G3/4"X14	WD-B12	18.5	16	46.5	32
Y1B-12-16WDZ	G3/4"X14	G1"X11	WD-B16	18.5	18	52.5	41
Y1B-16WDZ	G1"X11	G1"X11	WD-B16	20.5	18	54.5	41
Y1B-16-20WDZ	G1"X11	G1.1/4"X11	WD-B20	20.5	20	58.5	50
Y1B-20WDZ	G1.1/4"X11	G1.1/4"X11	WD-B20	20.5	20	58.5	50




1BG

英管外螺纹60° 内锥或六角端面用
组合垫密封 / 英管外螺纹O形圈
BSP MALE DOUBLE USE FOR 60° CONE SEAT OR
BONDED SEAL / BSP MALE O-RING

代号 PART NO.	螺纹 THREAD		O形圈 O-RING F端	尺寸 DIMENSIONS			
	E	F		A	B	L	S1
Y1BG-02Z	G1/8"X28	G1/8"X28	O7.97X1.88	10	7.6	25	14
Y1BG-04Z	G1/4"X19	G1/4"X19	O111	12	11	30.5	19
Y1BG-04-06Z	G1/4"X19	G3/8"X19	O113	12	11.5	32	24
Y1BG-06Z	G3/8"X19	G3/8"X19	O113	13.5	11.5	34.5	24
Y1BG-06-04Z	G3/8"X19	G1/4"X19	O111	13.5	11	32	22
Y1BG-06-08Z	G3/8"X19	G1/2"X14	O17.86X2.62	13.5	14	39.5	27
Y1BG-08Z	G1/2"X14	G1/2"X14	O17.86X2.62	16	14	39.5	27
Y1BG-08-06Z	G1/2"X14	G3/8"X19	O113	16	11.5	39	27
Y1BG-08-12Z	G1/2"X14	G3/4"X14	O119	16	14.5	44	36
Y1BG-10-08Z	G5/8"X14	G1/2"X14	O17.86X2.62	17.5	14	43	30
Y1BG-12Z	G3/4"X14	G3/4"X14	O119	18.5	14.5	45.5	36
Y1BG-12-08Z	G3/4"X14	G1/2"X14	O17.86X2.62	18.5	14	44	32
Y1BG-16-08Z	G1"X11	G1/2"X14	O17.86X2.62	20.5	14	49	41
Y1BG-16Z	G1"X11	G1"X11	O217	20.5	18.6	53	41
Y1BG-16-12Z	G1"X11	G3/4"X14	O119	20.5	14.5	50.5	41
Y1BG-20Z	G1.1/4"X11	G1.1/4"X11	O222	20.5	20	58.5	50
Y1BG-24Z	G1.1/2"X11	G1.1/2"X11	O224	23	21.5	61.5	60

注：F螺纹端与ISO 1179-1油口匹配使用。 Note: F thread end fit with ISO1179-1 port.




1BG9-OG

英管外螺纹60°内锥 / 英管外螺纹O形圈 90° 弯
BSP MALE 60° SEAT / BSP MALE O-RING 90° ELBOW

代号 PART NO.	螺纹 THREAD		O形圈 O-RING F端	尺寸 DIMENSIONS			
	E	F		A	B	S1	S2
Y1BG9-04OGZ	G1/4"X19	G1/4"X19	O111	24.5	31.5	14	19
Y1BG9-04-06OGZ	G1/4"X19	G3/8"X19	O113	26.5	36.8	16	22
Y1BG9-06OGZ	G3/8"X19	G3/8"X19	O113	28	36.8	16	22
Y1BG9-06-08OGZ	G3/8"X19	G1/2"X14	O17.86X2.62	31	43.2	22	27
Y1BG9-08OGZ	G1/2"X14	G1/2"X14	O17.86X2.62	34.5	43.2	22	27
Y1BG9-08-12OGZ	G1/2"X14	G3/4"X14	O119	40	49.3	27	32
Y1BG9-12OGZ	G3/4"X14	G3/4"X14	O119	40	49.3	27	32
Y1BG9-12-16OGZ	G3/4"X14	G1"X11	O217	45	53	33	41
Y1BG9-16OGZ	G1"X11	G1"X11	O217	46	53	33	41
Y1BG9-20-16OGZ	G1.1/4"X11	G1"X11	O217	50.5	58	41	41
Y1BG9-20OGZ	G1.1/4"X11	G1.1/4"X11	O222	51	59	41	50
Y1BG9-24OGZ	G1.1/2"X11	G1.1/2"X11	O224	58.5	63	48	55


注：F螺纹端与ISO 1179-1油口匹配使用。 Note: F thread end fit with ISO1179-1 port.



1BJ

英管外螺纹 60° 内锥或六角端面用组合垫密封 / 美制 JIC 外螺纹 74° 外锥
 BSP MALE DOUBLE USE FOR 60° CONE SEAT OR BONDED SEAL / JIC MALE 74° CONE


代号 PART NO.	螺纹 THREAD		尺寸 DIMENSIONS			
	E	F	A	B	L	S1
Y1BJ-02-04Z	G1/8"X28	7/16"X20	10	14	30	14
Y1BJ-02-05Z	G1/8"X28	1/2"X20	10	14	30	14
Y1BJ-02-06Z	G1/8"X28	9/16"X18	10	14.1	30	17
Y1BJ-04Z	G1/4"X19	7/16"X20	12	14	32	19
Y1BJ-04-05Z	G1/4"X19	1/2"X20	12	14	32	19
Y1BJ-04-06Z	G1/4"X19	9/16"X18	12	14.1	32	19
Y1BJ-04-08Z	G1/4"X19	3/4"X16	12	16.7	36.5	22
Y1BJ-04-10Z	G1/4"X19	7/8"X14	12	19.3	39	24
Y1BJ-06Z	G3/8"X19	9/16"X18	13.5	14.1	35.5	22
Y1BJ-06-04Z	G3/8"X19	7/16"X20	13.5	14	35.5	22
Y1BJ-06-05Z	G3/8"X19	1/2"X20	13.5	14	35.5	22
Y1BJ-06-08Z	G3/8"X19	3/4"X16	13.5	16.7	38.5	22
Y1BJ-06-10Z	G3/8"X19	7/8"X14	13.5	19.3	41	24
Y1BJ-06-12Z	G3/8"X19	1.1/16"X12	13.5	21.9	45	30
Y1BJ-08Z	G1/2"X14	3/4"X16	16	16.7	43	27
Y1BJ-08-04Z	G1/2"X14	7/16"X20	16	14	40	27
Y1BJ-08-05Z	G1/2"X14	1/2"X20	16	14	40	27
Y1BJ-08-06Z	G1/2"X14	9/16"X18	16	14.1	40	27
Y1BJ-08-10Z	G1/2"X14	7/8"X14	16	19.3	45.5	27
Y1BJ-08-12Z	G1/2"X14	1.1/16"X12	16	21.9	48	30
Y1BJ-08-14Z	G1/2"X14	1.3/16"X12	16	22.6	49.5	32
Y1BJ-08-16Z	G1/2"X14	1.5/16"X12	16	23.1	50	36
Y1BJ-10Z	G5/8"X14	7/8"X14	17.5	19.3	47	30
Y1BJ-10-08Z	G5/8"X14	3/4"X16	17.5	16.7	44	30
Y1BJ-10-12Z	G5/8"X14	1.1/16"X12	17.5	21.9	49.5	30
Y1BJ-10-16Z	G5/8"X14	1.5/16"X12	17.5	23.1	51.5	36
Y1BJ-12Z	G3/4"X14	1.1/16"X12	18.5	21.9	51.5	32
Y1BJ-12-06Z	G3/4"X14	9/16"X18	18.5	14.1	43.5	32
Y1BJ-12-08Z	G3/4"X14	3/4"X16	18.5	16.7	46.5	32
Y1BJ-12-10Z	G3/4"X14	7/8"X14	18.5	19.3	49	32
Y1BJ-12-14Z	G3/4"X14	1.3/16"X12	18.5	22.6	52	32
Y1BJ-12-16Z	G3/4"X14	1.5/16"X12	18.5	23.1	52.5	34
Y1BJ-12-20Z	G3/4"X14	1.5/8"X12	18.5	24.3	55.5	46
Y1BJ-16Z	G1"X11	1.5/16"X12	20.5	23.1	56	41
Y1BJ-16-08Z	G1"X11	3/4"X16	20.5	16.7	50	41
Y1BJ-16-10Z	G1"X11	7/8"X14	20.5	19.3	53	41
Y1BJ-16-12Z	G1"X11	1.1/16"X12	20.5	21.9	55.5	41
Y1BJ-16-14Z	G1"X11	1.3/16"X12	20.5	22.6	56	41
Y1BJ-16-20Z	G1"X11	1.5/8"X12	20.5	24.3	58	46
Y1BJ-20Z	G1.1/4"X11	1.5/8"X12	20.5	24.3	62	50
Y1BJ-20-12Z	G1.1/4"X11	1.1/16"X12	20.5	21.9	57.5	50
Y1BJ-20-16Z	G1.1/4"X11	1.5/16"X12	20.5	23.1	60.5	50
Y1BJ-20-24Z	G1.1/4"X11	1.7/8"X12	20.5	27.5	63	50
Y1BJ-24-16Z	G1.1/2"X11	1.5/16"X12	23	23.1	61	55
Y1BJ-24-20Z	G1.1/2"X11	1.5/8"X12	23	24.3	62.5	55
Y1BJ-24Z	G1.1/2"X11	1.7/8"X12	23	27.5	67.5	55
Y1BJ-24-32Z	G1.1/2"X11	2.1/2"X12	23	33.9	74	65
Y1BJ-32Z	G2"X11	2.1/2"X12	25.5	33.9	77.5	70
Y1BJ-32-24Z	G2"X11	1.7/8"X12	25.5	27.5	70	70



1BT-SP

英管外螺纹60° 内锥或六角端面用
 组合垫密封 / 英锥管外螺纹
 BSP MALE DOUBLE USE FOR 60° CONE SEAT
 OR BONDED SEAL / BSPT MALE


代号 PART NO.	螺纹 THREAD		尺寸 DIMENSIONS			
	E	F	A	B	L	S1
Y1BT-02SPZ	G1/8"X28	R1/8"X28	10	10	26	14
Y1BT-02-04SPZ	G1/8"X28	R1/4"X19	10	14.5	30.5	14
Y1BT-04SPZ	G1/4"X19	R1/4"X19	12	14.5	32	19
Y1BT-04-02SPZ	G1/4"X19	R1/8"X28	12	10	28	19
Y1BT-04-06SPZ	G1/4"X19	R3/8"X19	12	15	32	19
Y1BT-04-08SPZ	G1/4"X19	R1/2"X14	12	20	40	24
Y1BT-06SPZ	G3/8"X19	R3/8"X19	13.5	15	35.5	22
Y1BT-06-04SPZ	G3/8"X19	R1/4"X19	13.5	14.5	35.5	22
Y1BT-06-08SPZ	G3/8"X19	R1/2"X14	13.5	20	40.5	24
Y1BT-08SPZ	G1/2"X14	R1/2"X14	16	20	45	27
Y1BT-08-04SPZ	G1/2"X14	R1/4"X19	16	14.5	40.5	27
Y1BT-08-06SPZ	G1/2"X14	R3/8"X19	16	15	40	27
Y1BT-08-12SPZ	G1/2"X14	R3/4"X14	16	20	45	30
Y1BT-10-06SPZ	G5/8"X14	R3/8"X19	17.5	15.5	41.5	30
Y1BT-10-08SPZ	G5/8"X14	R1/2"X14	17.5	20	46.5	30
Y1BT-10-12SPZ	G5/8"X14	R3/4"X14	17.5	20	46.5	30
Y1BT-10-16SPZ	G5/8"X14	R1"X11	17.5	25.5	54	36
Y1BT-12SPZ	G3/4"X14	R3/4"X14	18.5	20	48.5	32
Y1BT-12-08SPZ	G3/4"X14	R1/2"X14	18.5	20	48.5	32
Y1BT-12-16SPZ	G3/4"X14	R1"X11	18.5	25.5	53.5	36
Y1BT-12-20SPZ	G3/4"X14	R1.1/4"X11	18.5	26.5	58	46
Y1BT-16SPZ	G1"X11	R1"X11	20.5	25.5	58	41
Y1BT-16-12SPZ	G1"X11	R3/4"X14	20.5	20	53	41
Y1BT-16-20SPZ	G1"X11	R1.1/4"X11	20.5	26.5	60	46
Y1BT-20SPZ	G1.1/4"X11	R1.1/4"X11	20.5	26.5	62	50
Y1BT-20-12SPZ	G1.1/4"X11	R3/4"X14	20.5	20.5	56	50
Y1BT-20-16SPZ	G1.1/4"X11	R1"X11	20.5	25.5	61	50
Y1BT-20-24SPZ	G1.1/4"X11	R1.1/2"X11	20.5	26.5	62	50
Y1BT-24SPZ	G1.1/2"X11	R1.1/2"X11	23	26.5	64.5	55
Y1BT-24-16SPZ	G1.1/2"X11	R1"X11	23	26	63.5	55
Y1BT-24-20SPZ	G1.1/2"X11	R1.1/4"X11	23	26.5	64.5	55
Y1BT-24-32SPZ	G1.1/2"X11	R2"X11	23	30	70	65
Y1BT-32SPZ	G2"X11	R2"X11	25.5	30	72.5	70
Y1BT-32-20SPZ	G2"X11	R1.1/4"X11	25.5	27	68.5	70
Y1BT-32-24SPZ	G2"X11	R1.1/2"X11	25.5	26.5	68.5	70
Y1BT-40SPZ	G2.1/2"X11	R2.1/2"X11	32	34	83	90
Y1BT-48SPZ	G3"X11	R3"X11	36	38	94	100



2B

英管外螺纹60°内锥或六角端面用组合垫密封 /
英管内螺纹60°外锥
BSP MALE DOUBLE USE FOR 60° CONE SEAT
OR BONDED SEAL / BSP FEMALE 60° CONE


代号 PART NO.	螺纹 THREAD		尺寸 DIMENSIONS				
	E	F	A	B	L	S1	S2
Y2B-02Z	G1/8"X28	G1/8"X28	10	5.5	25	14	14
Y2B-02-04Z	G1/8"X28	G1/4"X19	10	5.5	27	14	19
Y2B-04Z	G1/4"X19	G1/4"X19	12	5.5	29	19	19
Y2B-04-06Z	G1/4"X19	G3/8"X19	12	6.3	30.5	19	22
Y2B-04-08Z	G1/4"X19	G1/2"X14	12	7.5	32	19	27
Y2B-06Z	G3/8"X19	G3/8"X19	13.5	6.3	34	22	22
Y2B-06-08Z	G3/8"X19	G1/2"X14	13.5	7.5	35.5	22	27
Y2B-06-10Z	G3/8"X19	G5/8"X14	13.5	9.5	36	22	30
Y2B-08Z	G1/2"X14	G1/2"X14	16	7.5	40	27	27
Y2B-08-06Z	G1/2"X14	G3/8"X19	16	6.3	38.2	27	22
Y2B-08-12Z	G1/2"X14	G3/4"X14	16	10.9	41	27	32
Y2B-10Z	G5/8"X14	G5/8"X14	17.5	9.5	42	30	30
Y2B-10-08Z	G5/8"X14	G1/2"X14	18	7.5	41.5	30	27
Y2B-10-12Z	G5/8"X14	G3/4"X14	17.5	10.9	42.5	30	32
Y2B-12Z	G3/4"X14	G3/4"X14	18.5	10.9	44.5	32	32
Y2B-12-10Z	G3/4"X14	G5/8"X14	18.5	9.5	44	32	30
Y2B-12-16Z	G3/4"X14	G1"X11	18.5	11.7	46	32	41
Y2B-16Z	G1"X11	G1"X11	20.5	11.7	50	41	41
Y2B-16-12Z	G1"X11	G3/4"X14	20.5	10.9	48	41	32
Y2B-16-20Z	G1"X11	G1.1/4"X11	20.5	10.1	53	41	50
Y2B-20Z	G1.1/4"X11	G1.1/4"X11	20.5	10.1	55	50	50
Y2B-20-16Z	G1.1/4"X11	G1"X11	20.5	11.7	52	50	41
Y2B-20-24Z	G1.1/4"X11	G1.1/2"X11	20.5	12.5	55.5	50	55
Y2B-24Z	G1.1/2"X11	G1.1/2"X11	23	12.5	58	55	55
Y2B-32Z	G2"X11	G2"X11	25.5	16.1	63.5	70	70



2B9


英管外螺纹60°内锥 /
英管内螺纹60°外锥
BSP MALE 60° SEAT /
BSP FEMALE 60° CONE 90° ELBOW

代号 PART NO.	螺纹 THREAD		尺寸 DIMENSIONS			
	E	F	A	B	S1	S2
Y2B9-02Z	G1/8"X28	G1/8"X28	19.8	5.5	11	14
Y2B9-04Z	G1/4"X19	G1/4"X19	24.5	5.5	14	19
Y2B9-04-06Z	G1/4"X19	G3/8"X19	25	6.3	14	22
Y2B9-06Z	G3/8"X19	G3/8"X19	27.5	6.3	16	22
Y2B9-06-04Z	G3/8"X19	G1/4"X19	27.5	5.5	16	19
Y2B9-08Z	G1/2"X14	G1/2"X14	34.5	7.5	22	27
Y2B9-08-06Z	G1/2"X14	G3/8"X19	34.5	6.3	22	22
Y2B9-10Z	G5/8"X14	G5/8"X14	35	9.5	22	30
Y2B9-10-08Z	G5/8"X14	G1/2"X14	35	7.5	22	27
Y2B9-12Z	G3/4"X14	G3/4"X14	40	10.9	27	32
Y2B9-16Z	G1"X11	G1"X11	46	11.7	33	41
Y2B9-20Z	G1.1/4"X11	G1.1/4"X11	50.5	10.1	41	50
Y2B9-24Z	G1.1/2"X11	G1.1/2"X11	57.5	12.5	48	55
Y2B9-32Z	G2"X11	G2"X11	72.5	16.1	63	70

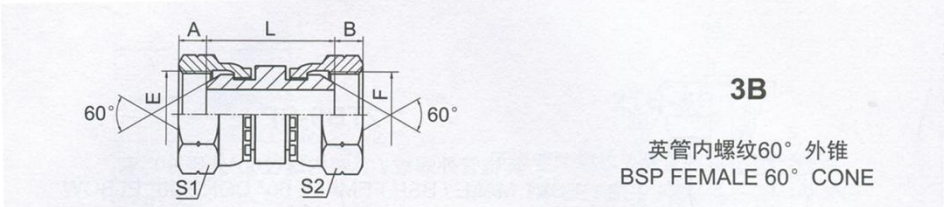


3B
英管内螺纹60° 外锥
BSP FEMALE 60° CONE

代号 PART NO.	螺纹 THREAD		尺寸 DIMENSIONS				
	E	F	A	B	L	S1	S2
Y3B-02Z	G1/8"X28	G1/8"X28	5.5	5.5	21	14	14
Y3B-02-04Z	G1/8"X28	G1/4"X19	5.5	5.5	23	14	19
Y3B-04Z	G1/4"X19	G1/4"X19	5.5	5.5	25	19	19
Y3B-04-06Z	G1/4"X19	G3/8"X19	5.5	6.3	26.5	19	22
Y3B-04-08Z	G1/4"X19	G1/2"X14	5.5	7.5	28.5	19	27
Y3B-06Z	G3/8"X19	G3/8"X19	6.3	6.3	27	22	22
Y3B-06-08Z	G3/8"X19	G1/2"X14	6.3	7.5	29.5	22	27
Y3B-08Z	G1/2"X14	G1/2"X14	7.5	7.5	31	27	27
Y3B-08-10Z	G1/2"X14	G5/8"X14	7.5	9.5	31.5	27	30
Y3B-08-12Z	G1/2"X14	G3/4"X14	7.5	10.9	32.5	27	32
Y3B-10Z	G5/8"X14	G5/8"X14	9.5	9.5	31.5	30	30
Y3B-10-12Z	G5/8"X14	G3/4"X14	9.5	10.9	33	30	32
Y3B-12Z	G3/4"X14	G3/4"X14	10.9	10.9	33.5	32	32
Y3B-12-16Z	G3/4"X14	G1"X11	10.9	11.7	35	32	41
Y3B-16Z	G1"X11	G1"X11	11.7	11.7	36.5	41	41
Y3B-16-20Z	G1"X11	G1.1/4"X11	11.7	10.1	39	41	50
Y3B-20Z	G1.1/4"X11	G1.1/4"X11	10.1	10.1	40.5	50	50
Y3B-24Z	G1.1/2"X11	G1.1/2"X11	12.5	12.5	42	55	55
Y3B-32Z	G2"X11	G2"X11	16.1	16.1	47	70	70

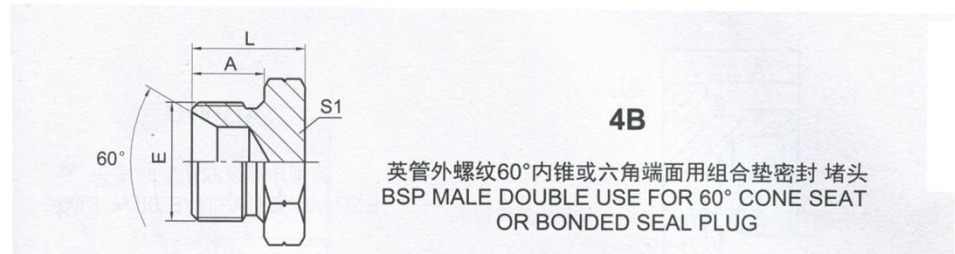


4B
英管外螺纹60°内锥或六角端面用组合垫密封 堵头
BSP MALE DOUBLE USE FOR 60° CONE SEAT
OR BONDED SEAL PLUG

代号 PART NO.	螺纹 THREAD	尺寸 DIMENSIONS		
	E	A	L	S1
Y4B-02Z	G1/8"X28	10	16	14
Y4B-04Z	G1/4"X19	12	18	19
Y4B-06Z	G3/8"X19	13.5	21.5	22
Y4B-08Z	G1/2"X14	16	26	27
Y4B-10Z	G5/8"X14	17.5	27.5	30
Y4B-12Z	G3/4"X14	18.5	29.5	32
Y4B-16Z	G1"X11	20.5	34	41
Y4B-20Z	G1.1/4"X11	20.5	37.5	50
Y4B-24Z	G1.1/2"X11	23	40	55
Y4B-32Z	G2"X11	25.5	43.5	70




5B

英管外螺纹60°内锥或六角端面用组合垫密封 / 英管内螺纹
 BSP MALE DOUBLE USE FOR 60° CONE SEAT OR BONDED SEAL / BSP FEMALE



6B




6B-LN

英管外螺纹60°内锥 过板接头
 BSP MALE 60° SEAT BULKHEAD

代号 PART NO.	螺纹 THREAD		尺寸 DIMENSIONS		
	E	F	A	L	S1
Y5B-02-04Z	G1/8"X28	G1/4"X19	10	29	19
Y5B-04-02Z	G1/4"X19	G 1/8"X28	12	28	19
Y5B-04Z	G1/4"X19	G1/4"X19	12	33	19
Y5B-04-06Z	G1/4"X19	G3/8"X19	12	36	22
Y5B-06-04Z	G3/8"X19	G1/4"X19	13.5	33.5	22
Y5B-06Z	G3/8"X19	G3/8"X19	13.5	37.5	22
Y5B-06-08Z	G3/8"X19	G1/2"X14	13.5	42.5	27
Y5B-08-06Z	G1/2"X14	G3/8"X19	16	38	27
Y5B-08Z	G1/2"X14	G1/2"X14	16	45	27
Y5B-08-10Z	G1/2"X14	G5/8"X14	16	46	30
Y5B-08-12Z	G1/2"X14	G3/4"X14	16	44.5	36
Y5B-10-08Z	G5/8"X14	G1/2"X14	17.5	41.5	30
Y5B-12-08Z	G3/4"X14	G1/2"X14	18.5	44.5	32
Y5B-12Z	G3/4"X14	G3/4"X14	18.5	48	36
Y5B-12-16Z	G3/4"X14	G1"X11	18.5	53.5	41
Y5B-16-12Z	G1"X11	G3/4"X14	20.5	47.5	41
Y5B-16Z	G1"X11	G1"X11	20.5	55.5	41
Y5B-16-20Z	G1"X11	G1.1/4"X11	20.5	56.5	50
Y5B-20-16Z	G1.1/4"X11	G1"X11	20.5	49	50
Y5B-20Z	G1.1/4"X11	G1.1/4"X11	20.5	52.5	50
Y5B-20-24Z	G1.1/4"X11	G1.1/2"X11	20.5	57.5	55
Y5B-24Z	G1.1/2"X11	G1.1/2"X11	23	58	55
Y5B-32-24Z	G2"X11	G1.1/2"X11	25.5	59.5	70
Y5B-32Z	G2"X11	G2"X11	25.5	62	70


代号 PART NO.		螺纹 THREAD		尺寸 DIMENSIONS				
接头体BODY	组件ASSEMBLY	E	F	A	B	L	S1	S2
Y6B-02Z	6B-02LNZ	G1/8"X28	G1/8"X28	10	33	49	14	14
Y6B-04Z	6B-04LNZ	G1/4"X19	G1/4"X19	12	35	53	19	19
Y6B-06Z	6B-06LNZ	G3/8"X19	G3/8"X19	13.5	35	56.5	22	22
Y6B-08Z	6B-08LNZ	G1/2"X14	G1/2"X14	16	39	65	27	27
Y6B-10Z	6B-10LNZ	G5/8"X14	G5/8"X14	17.5	40	67.5	30	30
Y6B-12Z	6B-12LNZ	G3/4"X14	G3/4"X14	18.5	42	71.5	32	32
Y6B-16Z	6B-16LNZ	G1"X11	G1"X11	20.5	50	84	41	41
Y6B-20Z	6B-20LNZ	G1.1/4"X11	G1.1/4"X11	20.5	52	89.5	50	50
Y6B-24Z	6B-24LNZ	G1.1/2"X11	G1.1/2"X11	23	55	93	55	55
Y6B-32Z	6B-32LNZ	G2"X11	G2"X11	25.5	55	97.5	70	70



7B9-PK

英管内螺纹 90° 弯
BSP FEMALE 90° ELBOW


代号 PART NO.	螺纹 THREAD		尺寸 DIMENSIONS		
	E	F	A	B	S1
Y7B9-02PKZ	G1/8"X28	G1/8"X28	20	20	16
Y7B9-04PKZ	G1/4"X19	G1/4"X19	22.5	22.5	19
Y7B9-06PKZ	G3/8"X19	G3/8"X19	26	26	24
Y7B9-08PKZ	G1/2"X14	G1/2"X14	31	31	27
Y7B9-12PKZ	G3/4"X14	G3/4"X14	34	34	33
Y7B9-16PKZ	G1"X11	G1"X11	42	42	41
Y7B9-20PKZ	G1.1/4"X11	G1.1/4"X11	48	48	50
Y7B9-24PKZ	G1.1/2"X11	G1.1/2"X11	53	53	60
Y7B9-32PKZ	G2"X11	G2"X11	62	62	70



AB

英管外螺纹60°内锥 三通
BSP MALE 60° SEAT TEE


代号 PART NO.	螺纹 THREAD			尺寸 DIMENSIONS			
	E	F	G	A	B	C	S1
YAB-02Z	G1/8"X28	G1/8"X28	G1/8"X28	19.8	19.8	19.8	11
YAB-04Z	G1/4"X19	G1/4"X19	G1/4"X19	24.5	24.5	24.5	14
YAB-04-06-04Z	G1/4"X19	G3/8"X19	G1/4"X19	26.5	27.5	26.5	16
YAB-06-04-06Z	G3/8"X19	G1/4"X19	G3/8"X19	27.5	26.5	27.5	16
YAB-06Z	G3/8"X19	G3/8"X19	G3/8"X19	27.5	27.5	27.5	16
YAB-06-08-06Z	G3/8"X19	G1/2"X14	G3/8"X19	31	34.5	31	22
YAB-08-06-08Z	G1/2"X14	G3/8"X19	G1/2"X14	34.5	31	34.5	22
YAB-08Z	G1/2"X14	G1/2"X14	G1/2"X14	34.5	34.5	34.5	22
YAB-10Z	G5/8"X14	G5/8"X14	G5/8"X14	35	35	35	22
YAB-12Z	G3/4"X14	G3/4"X14	G3/4"X14	40	40	40	27
YAB-12-16-12Z	G3/4"X14	G1"X11	G3/4"X14	43.5	46	43.5	33
YAB-16-12-16Z	G1"X11	G3/4"X14	G1"X11	46	43.5	46	33
YAB-16Z	G1"X11	G1"X11	G1"X11	46	46	46	33
YAB-20Z	G1.1/4"X11	G1.1/4"X11	G1.1/4"X11	50.5	50.5	50.5	41
YAB-24Z	G1.1/2"X11	G1.1/2"X11	G1.1/2"X11	57.5	57.5	57.5	48
YAB-32Z	G2"X11	G2"X11	G2"X11	72.5	72.5	72.5	63



BB

英管外螺纹60°内锥 / 英管内螺纹60°外锥 分支三通
BSP MALE 60° SEAT / BSP FEMALE
60° CONE BRANCH TEE


代号 PAT NO.	螺纹 THREAD			尺寸 DIMENSIONS				
	E	F	G	A	B	C	S1	S2
YBB-02Z	G1/8"X28	G1/8"X28	G1/8"X28	19.8	5.5	19.8	11	14
YBB-04Z	G1/4"X19	G1/4"X19	G1/4"X19	24.5	5.5	24.5	14	19
YBB-06Z	G3/8"X19	G3/8"X19	G3/8"X19	27.5	6.3	27.5	16	22
YBB-08Z	G1/2"X14	G1/2"X14	G1/2"X14	34.5	7.5	34.5	22	27
YBB-12Z	G3/4"X14	G3/4"X14	G3/4"X14	40	10.9	40	27	32
YBB-16Z	G1"X11	G1"X11	G1"X11	46	11.7	46	33	41
YBB-20Z	G1.1/4"X11	G1.1/4"X11	G1.1/4"X11	50.5	10.1	50.5	41	50
YBB-24Z	G1.1/2"X11	G1.1/2"X11	G1.1/2"X11	57.5	12.5	57.5	48	55
YBB-32Z	G2"X11	G2"X11	G2"X11	72.5	16.1	72.5	63	70

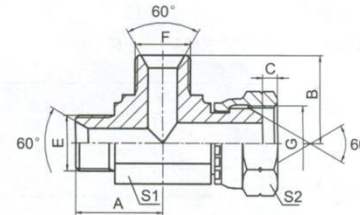

CB


英管外螺纹60°内锥 / 英管内螺纹60°外锥
主支三通
BSP MALE 60° SEAT / BSP FEMALE 60° CONE
RUN TEE

代号 PART NO.	螺纹 THREAD			尺寸 DIMENSIONS				
	E	F	G	A	B	C	S1	S2
YCB-02Z	G1/8"X28	G1/8"X28	G1/8"X28	19.8	19.8	5.5	11	14
YCB-04Z	G1/4"X19	G1/4"X19	G1/4"X19	25	25	5.5	14	19
YCB-06Z	G3/8"X19	G3/8"X19	G3/8"X19	27.5	27.5	6.3	16	22
YCB-08Z	G1/2"X14	G1/2"X14	G1/2"X14	34.5	34.5	7.5	22	27
YCB-10Z	G5/8"X14	G5/8"X14	G5/8"X14	35	35	9.5	22	30
YCB-12Z	G3/4"X14	G3/4"X14	G3/4"X14	40	40	10.9	27	32
YCB-16Z	G1"X11	G1"X11	G1"X11	46	46	11.7	33	41
YCB-20Z	G1.1/4"X11	G1.1/4"X11	G1.1/4"X11	50.5	50.5	10.1	41	50
YCB-24Z	G1.1/2"X11	G1.1/2"X11	G1.1/2"X11	57.5	57.5	12.5	48	55
YCB-32Z	G2"X11	G2"X11	G2"X11	72.5	72.5	16.1	63	70




GB-PK
英管内螺纹 三通
BSP FEMALE TEE

代号 PART NO.	螺纹 THREAD			尺寸 DIMENSIONS			
	E	F	G	A	B	C	S1
YGB-02PKZ	G1/8"X28	G1/8"X28	G1/8"X28	20	20	20	16
YGB-04PKZ	G1/4"X19	G1/4"X19	G1/4"X19	22.5	22.5	22.5	19
YGB-06PKZ	G3/8"X19	G3/8"X19	G3/8"X19	26	26	26	24
YGB-08PKZ	G1/2"X14	G1/2"X14	G1/2"X14	31	31	31	27
YGB-12PKZ	G3/4"X14	G3/4"X14	G3/4"X14	34	34	34	33
YGB-16PKZ	G1"X11	G1"X11	G1"X11	42	42	42	41
YGB-20PKZ	G1.1/4"X11	G1.1/4"X11	G1.1/4"X11	48	48	48	50
YGB-24PKZ	G1.1/2"X11	G1.1/2"X11	G1.1/2"X11	53	53	53	60
YGB-32PKZ	G2"X11	G2"X11	G2"X11	62	62	62	70




9S
日本英管内螺纹60° 内锥堵头
JIS GAS FEMALE 60° SEAT PLUG

代号 PART NO.	螺纹 THREAD	尺寸 DIMENSIONS			
	E	A	L	S1	S2
Y9S-04Z	G1/4"X19	8	14.5	17	19
Y9S-06Z	G3/8"X19	9	15.5	19	22
Y9S-08Z	G1/2"X14	12	19	22	27
Y9S-12Z	G3/4"X14	13.5	23.5	32	32
Y9S-16Z	G1"X11	16	25	36	41
Y9S-20Z	G1.1/4"X11	18.6	30	50	50
Y9S-24Z	G1.1/2"X11	19	32.5	55	55
Y9S-32Z	G2"X11	22.8	35.5	70	70



1T-SP
英锥管外螺纹
BSPT MALE


代号 PART NO.	螺纹 THREAD		尺寸 DIMENSIONS			
	E	F	A	B	L	S1
Y1T-02SPZ	R1/8"X28	R1/8"X28	10	10	26	12
Y1T-02-04SPZ	R1/8"X28	R1/4"X19	10	14.5	30.5	14
Y1T-02-06SPZ	R1/8"X28	R3/8"X19	10	15	31	17
Y1T-04SPZ	R1/4"X19	R1/4"X19	14.5	14.5	34	14
Y1T-04-06SPZ	R1/4"X19	R3/8"X19	14.5	15	35	17
Y1T-04-08SPZ	R1/4"X19	R1/2"X14	15	20	43	22
Y1T-06SPZ	R3/8"X19	R3/8"X19	15	15	36	17
Y1T-06-08SPZ	R3/8"X19	R1/2"X14	15	20	43	22
Y1T-08SPZ	R1/2"X14	R1/2"X14	20	20	46	22
Y1T-08-12SPZ	R1/2"X14	R3/4"X14	20	20	48	27
Y1T-12SPZ	R3/4"X14	R3/4"X14	20	20	48	27
Y1T-12-16SPZ	R3/4"X14	R1"X11	20	25.5	55.5	36
Y1T-16SPZ	R1"X11	R1"X11	25.5	25.5	61	36
Y1T-16-20SPZ	R1"X11	R1.1/4"X11	25.5	26.5	64	46
Y1T-20SPZ	R1.1/4"X11	R1.1/4"X11	26.5	26.5	65.5	46
Y1T-20-24SPZ	R1.1/4"X11	R1.1/2"X11	26.5	26.5	67	50
Y1T-24SPZ	R1.1/2"X11	R1.1/2"X11	26.5	26.5	67	50
Y1T-24-32SPZ	R1.1/2"X11	R2"X11	26.5	30	71.5	65
Y1T-32SPZ	R2"X11	R2"X11	30	30	75	65

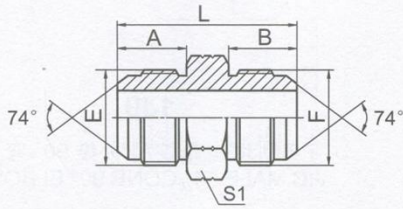

1J

美制JIC外螺纹74°外锥
JIC MALE 74° CONE
REF. ISO 8434-2


代号 PART NO.	螺纹 THREAD		尺寸 DIMENSIONS			
	E	F	A	B	L	S1
Y1J-02Z	5/16"X24	5/16"X24	11.4	11.4	29	12
Y1J-02-03Z	5/16"X24	3/8"X24	11.4	12.2	29.5	12
Y1J-03Z	3/8"X24	3/8"X24	12.2	12.2	30.5	12
Y1J-04Z	7/16"X20	7/16"X20	14	14	35	12
Y1J-04-05Z	7/16"X20	1/2"X20	14	14	35	14
Y1J-04-06Z	7/16"X20	9/16"X18	14	14.1	35.9	17
Y1J-04-08Z	7/16"X20	3/4"X16	14	16.7	38.5	22
Y1J-05Z	1/2"X20	1/2"X20	14	14	35	14
Y1J-05-06Z	1/2"X20	9/16"X18	14	14.1	35.9	17
Y1J-05-08Z	1/2"X20	3/4"X16	14	16.7	38.3	22
Y1J-05-10Z	1/2"X20	7/8"X14	14	19.3	42.7	24
Y1J-06Z	9/16"X18	9/16"X18	14.1	14.1	36	17
Y1J-06-08Z	9/16"X18	3/4"X16	14.1	16.7	38.4	22
Y1J-06-10Z	9/16"X18	7/8"X14	14.1	19.3	42.8	24
Y1J-06-12Z	9/16"X18	1.1/16"X12	14.1	21.9	47.2	30
Y1J-08Z	3/4"X16	3/4"X16	16.7	16.7	41	22
Y1J-08-10Z	3/4"X16	7/8"X14	16.7	19.3	44	24
Y1J-08-12Z	3/4"X16	1.1/16"X12	16.7	21.9	49.8	30
Y1J-08-16Z	3/4"X16	1.5/16"X12	16.7	23.1	51	36
Y1J-10Z	7/8"X14	7/8"X14	19.3	19.3	48	24
Y1J-10-12Z	7/8"X14	1.1/16"X12	19.3	21.9	51	30
Y1J-10-16Z	7/8"X14	1.5/16"X12	19.3	23.1	53.2	36
Y1J-12Z	1.1/16"X12	1.1/16"X12	21.9	21.9	55	30
Y1J-12-14Z	1.1/16"X12	1.3/16"X12	21.9	22.6	55.5	32
Y1J-12-16Z	1.1/16"X12	1.5/16"X12	21.9	23.1	55.8	36
Y1J-14Z	1.3/16"X12	1.3/16"X12	22.6	22.6	56.1	32
Y1J-14-16Z	1.3/16"X12	1.5/16"X12	22.6	23.1	56.5	36
Y1J-16Z	1.5/16"X12	1.5/16"X12	23.1	23.1	57	36
Y1J-16-20Z	1.5/16"X12	1.5/8"X12	23.1	24.3	60.3	46
Y1J-16-24Z	1.5/16"X12	1.7/8"X12	23.1	27.5	65.5	50
Y1J-20Z	1.5/8"X12	1.5/8"X12	24.3	24.3	61.5	46
Y1J-20-24Z	1.5/8"X12	1.7/8"X12	24.3	27.5	66.8	50
Y1J-20-32Z	1.5/8"X12	2.1/2"X12	24.3	33.9	75	65
Y1J-24Z	1.7/8"X12	1.7/8"X12	27.5	27.5	70	50
Y1J-24-32Z	1.7/8"X12	2.1/2"X12	27.5	33.9	78.5	65
Y1J-32Z	2.1/2"X12	2.1/2"X12	33.9	33.9	86.5	65



1J9


美制JIC外螺纹74°外锥 90°弯
JIC MALE 74° CONE 90° ELBOW

代号 PART NO.	螺纹 THREAD		尺寸 DIMENSIONS		
	E	F	A	B	S1
Y1J9-02Z	5/16"X24	5/16"X24	20.5	20.5	11
Y1J9-03Z	3/8"X24	3/8"X24	22	22	11
Y1J9-04Z	7/16"X20	7/16"X20	24.5	24.5	11
Y1J9-05Z	1/2"X20	1/2"X20	26.6	26.6	14
Y1J9-05-06Z	1/2"X20	9/16"X18	28.6	26.9	14
Y1J9-06Z	9/16"X18	9/16"X18	26.9	26.9	14
Y1J9-06-08Z	9/16"X18	3/4"X16	30	32	19
Y1J9-06-10Z	9/16"X18	7/8"X14	32	37.8	22
Y1J9-08Z	3/4"X16	3/4"X16	32	32	19
Y1J9-08-10Z	3/4"X16	7/8"X14	34.8	37.8	22
Y1J9-10Z	7/8"X14	7/8"X14	37.8	37.8	22
Y1J9-10-12Z	7/8"X14	1.1/16"X12	41	44.2	27
Y1J9-12Z	1.1/16"X12	1.1/16"X12	44.2	44.2	27
Y1J9-14Z	1.3/16"X12	1.3/16"X12	47.5	47.5	30
Y1J9-16Z	1.5/16"X12	1.5/16"X12	49	49	33
Y1J9-20Z	1.5/8"X12	1.5/8"X12	55.5	55.5	41
Y1J9-24Z	1.7/8"X12	1.7/8"X12	62.5	62.5	48
Y1J9-32Z	2.1/2"X12	2.1/2"X12	78	78	63



1JB-WD
JIC外螺纹74°外
锥 / 英管外螺纹胶垫密封
JIC MALE 74° CONE / BSP
MALE CAPTIVE SEAL


代号 PART NO.	螺纹 THREAD		胶垫 CAPTIVE	尺寸 DIMENSIONS			
	E	F	F端	A	B	L	S1
Y1JB-04-02WDZ	7/16"X20	G1/8"X28	WD-B02	14	8	29.5	14
Y1JB-04WDZ	7/16"X20	G1/4"X19	WD-B04	14	12	34.8	19
Y1JB-04-06WDZ	7/16"X20	G3/8"X19	WD-B06	14	12	35.7	22
Y1JB-04-08WDZ	7/16"X20	G1/2"X14	WD-B08	14	14	39.2	27
Y1JB-05-04WDZ	1/2"X20	G1/4"X19	WD-B04	14	12	34.8	19
Y1JB-05-06WDZ	1/2"X20	G3/8"X19	WD-B06	14	12	35.5	22
Y1JB-06-02WDZ	9/16"X18	G1/8"X28	WD-B02	14.1	8	31.1	17
Y1JB-06-04WDZ	9/16"X18	G1/4"X19	WD-B04	14.1	12	35.1	19
Y1JB-06WDZ	9/16"X18	G3/8"X19	WD-B06	14.1	12	36	22
Y1JB-06-08WDZ	9/16"X18	G1/2"X14	WD-B08	14.1	14	39.4	27
Y1JB-08-04WDZ	3/4"X16	G1/4"X19	WD-B04	16.7	12	38	22
Y1JB-08-06WDZ	3/4"X16	G3/8"X19	WD-B06	16.7	12	38.5	22
Y1JB-08WDZ	3/4"X16	G1/2"X14	WD-B08	16.7	14	42	27
Y1JB-10-08WDZ	7/8"X14	G1/2"X14	WD-B08	19.3	14	44.5	27
Y1JB-10-12WDZ	7/8"X14	G3/4"X14	WD-B12	19.3	16	48.1	32
Y1JB-12-08WDZ	1.1/16"X12	G1/2"X14	WD-B08	21.9	14	48.5	30
Y1JB-12WDZ	1.1/16"X12	G3/4"X14	WD-B12	21.9	16	50.9	32
Y1JB-12-16WDZ	1.1/16"X12	G1"X11	WD-B16	21.9	18	56	41
Y1JB-16-12WDZ	1.5/16"X12	G3/4"X14	WD-B12	23.1	16	52.7	36
Y1JB-16WDZ	1.5/16"X12	G1"X11	WD-B16	23.1	18	54.7	41
Y1JB-16-20WDZ	1.5/16"X12	G1.1/4"X11	WD-B20	23.1	20	59	50
Y1JB-20-16WDZ	1.5/8"X12	G1"X11	WD-B16	24.3	18	58	46
Y1JB-20WDZ	1.5/8"X12	G1.1/4"X11	WD-B20	24.3	20	60	50
Y1JB-20-24WDZ	1.5/8"X12	G1.1/2"X11	WD-B24	24.3	22	63	55
Y1JB-24-20WDZ	1.7/8"X12	G1.1/4"X11	WD-B20	27.5	20	63.1	50
Y1JB-24WDZ	1.7/8"X12	G1.1/2"X11	WD-B24	27.5	22	67.1	55

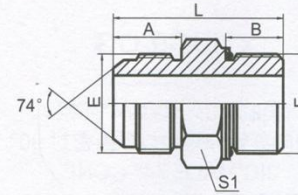

1JG
美制JIC外螺纹74°外锥 / 英管外螺纹O形圈
JIC MALE 74° CONE / BSP MALE O-RING

代号 PART NO.	螺纹 THREAD		O形圈 O-RING	尺寸 DIMENSIONS			
	E	F	F端	A	B	L	S1
Y1JG-04-02Z	7/16"X20	G1/8"X28	O7.97X1.88	14	7.6	29.5	14
Y1JG-04Z	7/16"X20	G1/4"X19	O111	14	11	32.5	19
Y1JG-04-06Z	7/16"X20	G3/8"X19	O113	14	11.5	34	24
Y1JG-04-08Z	7/16"X20	G1/2"X14	O17.86X2.62	14	14	37.5	27
Y1JG-05-04Z	1/2"X20	G1/4"X19	O111	14	11	32.5	19
Y1JG-05-06Z	1/2"X20	G3/8"X19	O113	14	11.5	35	24
Y1JG-05-08Z	1/2"X20	G1/2"X14	O17.86X2.62	14	14	37.5	27
Y1JG-06-04Z	9/16"X18	G1/4"X19	O111	14.1	11	31.5	19
Y1JG-06Z	9/16"X18	G3/8"X19	O113	14.1	11.5	34	24
Y1JG-06-08Z	9/16"X18	G1/2"X14	O17.86X2.62	14.1	14	37.5	27
Y1JG-08-04Z	3/4"X16	G1/4"X19	O111	16.7	11	35.5	22
Y1JG-08-06Z	3/4"X16	G3/8"X19	O113	16.7	11.5	37	24
Y1JG-08Z	3/4"X16	G1/2"X14	O17.86X2.62	16.7	14	40.5	27
Y1JG-08-12Z	3/4"X16	G3/4"X14	O119	16.7	14.5	43	36
Y1JG-10-06Z	7/8"X14	G3/8"X19	O113	19.3	11.5	39.5	24
Y1JG-10-08Z	7/8"X14	G1/2"X14	O17.86X2.62	19.3	14	43	27
Y1JG-10-12Z	7/8"X14	G3/4"X14	O119	19.3	14.5	47	36
Y1JG-12-08Z	1.1/16"X12	G1/2"X14	O17.86X2.62	21.9	14	47.5	30
Y1JG-12Z	1.1/16"X12	G3/4"X14	O119	21.9	14.5	49	36
Y1JG-12-16Z	1.1/16"X12	G1"X11	O217	21.9	18.6	52.5	41
Y1JG-12-20Z	1.1/16"X12	G1.1/4"X11	O222	21.9	20	57	50
Y1JG-16-12Z	1.5/16"X12	G3/4"X14	O119	23.1	14.5	51	36
Y1JG-16Z	1.5/16"X12	G1"X11	O217	23.1	18.6	55	41
Y1JG-16-20Z	1.5/16"X12	G1.1/4"X11	O222	23.1	20	59.5	50
Y1JG-20-16Z	1.5/8"X12	G1"X11	O217	24.3	18.6	56.5	46
Y1JG-20Z	1.5/8"X12	G1.1/4"X11	O222	24.3	20	59	50
Y1JG-24-16Z	1.7/8"X12	G1"X11	O217	27.5	18.6	62	50
Y1JG-24-20Z	1.7/8"X12	G1.1/4"X11	O222	27.5	20	65.5	50
Y1JG-24Z	1.7/8"X12	G1.1/2"X11	O224	27.5	21.5	64	60

注：F螺纹端与ISO 1179-1油口匹配使用。 Note: F thread end fit with ISO1179-1 port.




1JG9-OG

美制JIC外螺纹74°外锥 /
可调向英管外螺纹O形圈密封 90° 弯
JIC MALE 74° CONE /
ADJUSTABLE BSP MALE O-RING SEAL
90° ELBOW

代号 PART NO.	螺纹 THREAD		O形圈 O-RING F端	尺寸 DIMENSIONS			
	E	F		A	B	S1	S2
Y1JG9-04-02OGZ	7/16"X20	G1/8"X28	O7.97X1.88	24.5	25.5	11	14
Y1JG9-04-06OGZ	7/16"X20	G3/8"X19	O113	27.5	36.8	16	22
Y1JG9-04OGZ	7/16"X20	G1/4"X19	O111	26.6	31.5	14	19
Y1JG9-05-04OGZ	1/2"X20	G1/4"X19	O111	26.5	31.8	14	19
Y1JG9-05-06OGZ	1/2"X20	G3/8"X19	O113	28	35.5	16	22
Y1JG9-05-08OGZ	1/2"X20	G1/2"X14	O17.86X2.62	32	43.2	22	27
Y1JG9-06-04OGZ	9/16"X18	G1/4"X19	O111	26.9	31.3	14	19
Y1JG9-06-08OGZ	9/16"X18	G1/2"X14	O17.86X2.62	32.5	43.2	22	27
Y1JG9-06OGZ	9/16"X18	G3/8"X19	O113	28.5	35.8	16	22
Y1JG9-08-04OGZ	3/4"X16	G1/4"X19	O111	32	33.5	19	19
Y1JG9-08OGZ	3/4"X16	G1/2"X14	O17.86X2.62	34.8	43.2	22	27
Y1JG9-08-06OGZ	3/4"X16	G3/8"X19	O113	32	36.8	19	22
Y1JG9-08-12OGZ	3/4"X16	G3/4"X14	O119	37.9	49.3	27	32
Y1JG9-10-06OGZ	7/8"X14	G3/8"X19	O113	37.8	39.2	22	22
Y1JG9-10-08OGZ	7/8"X14	G1/2"X14	O17.86X2.62	37.8	43.2	22	27
Y1JG9-10-12OGZ	7/8"X14	G3/4"X14	O119	41	49.3	27	32
Y1JG9-12OGZ	1.1/16"X12	G3/4"X14	O119	44.2	49.3	27	32
Y1JG9-12-08OGZ	1.1/16"X12	G1/2"X14	O17.86X2.62	44.2	46.5	27	27
Y1JG9-12-16OGZ	1.1/16"X12	G1"X11	O217	48	53	33	41
Y1JG9-16OGZ	1.5/16"X12	G1"X11	O217	49	53	33	41
Y1JG9-16-12OGZ	1.5/16"X12	G3/4"X14	O119	49	53	33	32
Y1JG9-16-20OGZ	1.5/16"X12	G1.1/4"X11	O222	54	59.5	41	50
Y1JG9-20OGZ	1.5/8"X12	G1.1/4"X11	O222	55.5	59.5	41	50
Y1JG9-20-16OGZ	1.5/8"X12	G1"X11	O217	55.5	58	41	41
Y1JG9-24-16OGZ	1.7/8"X12	G1"X11	O217	62.5	63	48	41
Y1JG9-24-20OGZ	1.7/8"X12	G1.1/4"X11	O222	62.5	63	48	50
Y1JG9-24OGZ	1.7/8"X12	G1.1/2"X11	O224	62.5	63	48	55


注：F螺纹端与ISO 1179-1油口匹配使用。 Note: F thread end fit with ISO1179-1 port.



1JN


JIC外螺纹74°外锥 / 布锥管外螺纹
JIC MALE 74° CONE / NPT MALE

代号 PART NO.	螺纹 THREAD		尺寸 DIMENSIONS			
	E	F	A	B	L	S1
Y1JN-02Z	5/16"X24	Z1/8"X27	11.4	10.5	28	12
Y1JN-04-02Z	7/16"X20	Z1/8"X27	14	10.5	31	12
Y1JN-04Z	7/16"X20	Z1/4"X18	14	15	36.2	17
Y1JN-04-06Z	7/16"X20	Z3/8"X18	14	15	36.2	19
Y1JN-04-08Z	7/16"X20	Z1/2"X14	14	19.5	41.5	24
Y1JN-05-02Z	1/2"X20	Z1/8"X27	14	10.5	31	14
Y1JN-05-04Z	1/2"X20	Z1/4"X18	14	15	36.2	17
Y1JN-05-06Z	1/2"X20	Z3/8"X18	14	15	36.2	19
Y1JN-05-08Z	1/2"X20	Z1/2"X14	14	19.5	41.5	24
Y1JN-06-04Z	9/16"X18	Z1/4"X18	14.1	15	34.5	17
Y1JN-06Z	9/16"X18	Z3/8"X18	14.1	15	36.3	19
Y1JN-06-08Z	9/16"X18	Z1/2"X14	14.1	19.5	41.5	24
Y1JN-08-04Z	3/4"X16	Z1/4"X18	16.7	15	38.9	22
Y1JN-08-06Z	3/4"X16	Z3/8"X18	16.7	15	38.9	22
Y1JN-08Z	3/4"X16	Z1/2"X14	16.7	19.5	44	24
Y1JN-08-12Z	3/4"X16	Z3/4"X14	16.7	19.5	46.5	30
Y1JN-10-06Z	7/8"X14	Z3/8"X18	19.3	15	43.2	24
Y1JN-10-08Z	7/8"X14	Z1/2"X14	19.3	19.8	48	24
Y1JN-10-12Z	7/8"X14	Z3/4"X14	19.3	19.5	49	30
Y1JN-12-08Z	1.1/16"X12	Z1/2"X14	21.9	19.8	52.3	30
Y1JN-12Z	1.1/16"X12	Z3/4"X14	21.9	19.5	52.3	30
Y1JN-12-16Z	1.1/16"X12	Z1"X11.5	21.9	24.6	57.2	36
Y1JN-12-20Z	1.1/16"X12	Z1.1/4"X11.5	21.9	26.5	61	46
Y1JN-14-12Z	1.3/16"X12	Z3/4"X14	22.6	19.8	53.1	32
Y1JN-16-12Z	1.5/16"X12	Z3/4"X14	23.1	19.8	53.5	36
Y1JN-16Z	1.5/16"X12	Z1"X11.5	23.1	24.6	58.4	36
Y1JN-16-20Z	1.5/16"X12	Z1.1/4"X11.5	23.1	25.4	61	46
Y1JN-16-24Z	1.5/16"X12	Z1.1/2"X11.5	23.1	27.5	65.5	50
Y1JN-20-16Z	1.5/8"X12	Z1"X11.5	24.3	24.6	61	46
Y1JN-20Z	1.5/8"X12	Z1.1/4"X11.5	24.3	25.4	62.2	46
Y1JN-20-24Z	1.5/8"X12	Z1.1/2"X11.5	24.3	26.2	64.9	50
Y1JN-24-20Z	1.7/8"X12	Z1.1/4"X11.5	27.5	25.4	67.5	50
Y1JN-24Z	1.7/8"X12	Z1.1/2"X11.5	27.5	26.2	68.1	50
Y1JN-24-32Z	1.7/8"X12	Z2"X11.5	27.5	27.5	72	65
Y1JN-32Z	2.1/2"X12	Z2"X11.5	33.9	26.9	79	65
Y1JN-32-20Z	2.1/2"X12	Z1.1/4"X11.5	33.9	26.5	77.5	65
Y1JN-32-24Z	2.1/2"X12	Z1.1/2"X11.5	33.9	27.5	78.5	65



1JN9

JIC外螺纹74°外锥 / 布锥管外螺纹 90°弯
JIC MALE 74° CONE / NPT MALE 90° ELBOW




1JN9-L

JIC外螺纹74°外锥 / 加长布锥管外螺纹 90°弯
JIC MALE 74° CONE / LONG NPT MALE 90° ELBOW

代号 PART NO.	螺纹 THREAD		尺寸 DIMENSIONS		
	E	F	A	B	S1
Y1JN9-02Z	5/16"X24	Z1/8"X27	21	21	11
Y1JN9-03-02Z	3/8"X24	Z1/8"X27	22	21	11
Y1JN9-04Z	7/16"X20	Z1/4"X18	25.6	25.5	14
Y1JN9-04-02Z	7/16"X20	Z1/8"X27	24.5	21	11
Y1JN9-04-06Z	7/16"X20	Z3/8"X18	29.5	31	19
Y1JN9-05-02Z	1/2"X20	Z1/8"X27	26.6	23.5	14
Y1JN9-05-04Z	1/2"X20	Z1/4"X18	25.6	25.5	14
Y1JN9-05-06Z	1/2"X20	Z3/8"X18	29.5	31	19
Y1JN9-06Z	9/16"X18	Z3/8"X18	29	31	19
Y1JN9-06-04Z	9/16"X18	Z1/4"X18	25.8	25.5	14
Y1JN9-06-08Z	9/16"X18	Z1/2"X14	32	36.7	22
Y1JN9-08Z	3/4"X16	Z1/2"X14	34.8	37.3	22
Y1JN9-08-04Z	3/4"X16	Z1/4"X18	32	28.5	19
Y1JN9-08-06Z	3/4"X16	Z3/8"X18	32	31	19
Y1JN9-08-12Z	3/4"X16	Z3/4"X14	37.9	44	27
Y1JN9-10-06Z	7/8"X14	Z3/8"X18	37.8	32.5	22
Y1JN9-10-08Z	7/8"X14	Z1/2"X14	37.8	37.3	22
Y1JN9-10-12Z	7/8"X14	Z3/4"X14	41	44	27
Y1JN9-10-16Z	7/8"X14	Z1"X11.5	44.5	50	33
Y1JN9-12Z	1.1/16"X12	Z3/4"X14	44.2	44	27
Y1JN9-12-08Z	1.1/16"X12	Z1/2"X14	44.2	40	27
Y1JN9-12-16Z	1.1/16"X12	Z1"X11.5	49	50	33
Y1JN9-12-20Z	1.1/16"X12	Z1.1/4"X11.5	52.5	54.5	41
Y1JN9-14-12Z	1.3/16"X12	Z3/4"X14	47.5	45	30
Y1JN9-14-16Z	1.3/16"X12	Z1"X11.5	48.5	50	33
Y1JN9-16Z	1.5/16"X12	Z1"X11.5	49	50	33
Y1JN9-16-12Z	1.5/16"X12	Z3/4"X14	49	51	33
Y1JN9-16-20Z	1.5/16"X12	Z1.1/4"X11.5	54	60.5	41
Y1JN9-16-24Z	1.5/16"X12	Z1.1/2"X11.5	58	63	48
Y1JN9-20Z	1.5/8"X12	Z1.1/4"X11.5	55.5	54.5	41
Y1JN9-20-16Z	1.5/8"X12	Z1"X11.5	55.5	59.6	41
Y1JN9-20-24Z	1.5/8"X12	Z1.1/2"X11.5	59.4	63	48
Y1JN9-24Z	1.7/8"X12	Z1.1/2"X11.5	62.5	63	48
Y1JN9-24-20Z	1.7/8"X12	Z1.1/4"X11.5	62.5	63	48
Y1JN9-32-24Z	2.1/2"X12	Z1.1/2"X11.5	75.4	67.5	63
Y1JN9-32Z	2.1/2"X12	Z2"X11.5	75.4	67.5	63


代号 PART NO.	螺纹 THREAD		尺寸 DIMENSIONS		
	E	F	A	B	S1
Y1JN9-04-02LZ	7/16"X20	Z1/8"X27	24.5	30	11
Y1JN9-04LZ	7/16"X20	Z1/4"X18	26.6	40.1	14
Y1JN9-05-02LZ	1/2"X20	Z1/8"X27	26.6	31	14
Y1JN9-05-04LZ	1/2"X20	Z1/4"X18	26.6	40.1	14
Y1JN9-06-04LZ	9/16"X18	Z1/4"X18	26.9	40.1	14
Y1JN9-06-08LZ	9/16"X18	Z1/2"X14	32	55.1	22
Y1JN9-08-06LZ	3/4"X16	Z3/8"X18	32	46.2	19
Y1JN9-08LZ	3/4"X16	Z1/2"X14	34.8	55.1	22
Y1JN9-10-08LZ	7/8"X14	Z1/2"X14	37.8	55.1	22
Y1JN9-12-08LZ	1.1/16"X12	Z1/2"X14	44.2	56.9	27
Y1JN9-12LZ	1.1/16"X12	Z3/4"X14	44.2	62	27
Y1JN9-16-12LZ	1.5/16"X12	Z3/4"X14	49	69.9	33
Y1JN9-16LZ	1.5/16"X12	Z1"X11.5	49	76.5	33
Y1JN9-20LZ	1.5/8"X12	Z1.1/4"X11.5	55.5	93.7	41
Y1JN9-24LZ	1.7/8"X12	Z1.1/2"X11.5	62.5	104.1	48
Y1JN9-32LZ	2.1/2"X12	Z2"X11.5	78	122.2	63



J1JO

美制JIC外螺纹74°外锥 / SAE
外螺纹带O形圈轻系列ISO 11926-3
JIC MALE 74° CONE / SAE O-RING
BOSS L-SERIES ISO 11926-3


代号 PART NO.	螺纹 THREAD		O形圈 O-RING	尺寸 DIMENSIONS			
	E	F		A	B	L	S1
Y1JO-04-02Z	7/16"X20	5/16"X24	O902	14	9.5	27.5	12
Y1JO-04-03Z	7/16"X20	3/8"X24	O903	14	7.54	27.5	14
Y1JO-04Z	7/16"X20	7/16"X20	O904	14	9.1	31	14
Y1JO-04-05Z	7/16"X20	1/2"X20	O905	14	9.1	31	17
Y1JO-04-06Z	7/16"X20	9/16"X18	O906	14	10	32.7	17
Y1JO-04-08Z	7/16"X20	3/4"X16	O908	14	11.1	33	22
Y1JO-05Z	1/2"X20	1/2"X20	O905	14	9.1	31	17
Y1JO-05-04Z	1/2"X20	7/16"X20	O904	14	9.1	31	14
Y1JO-05-06Z	1/2"X20	9/16"X18	O906	14	10	32.7	17
Y1JO-05-08Z	1/2"X20	3/4"X16	O908	14	11.1	34.7	22
Y1JO-06Z	9/16"X18	9/16"X18	O906	14.1	10	33	17
Y1JO-06-04Z	9/16"X18	7/16"X20	O904	14.1	9.1	32.2	17
Y1JO-06-05Z	9/16"X18	1/2"X20	O905	14.1	9.1	32.2	17
Y1JO-06-08Z	9/16"X18	3/4"X16	O908	14.1	11.1	33	22
Y1JO-06-10Z	9/16"X18	7/8"X14	O910	14.1	12.7	37.9	27
Y1JO-06-12Z	9/16"X18	1.1/16"X12	O912	14.1	15.1	40	32
Y1JO-08Z	3/4"X16	3/4"X16	O908	16.7	11.1	37.5	22
Y1JO-08-04Z	3/4"X16	7/16"X20	O904	16.7	9.1	36.2	22
Y1JO-08-06Z	3/4"X16	9/16"X18	O906	16.7	9.93	37	22
Y1JO-08-10Z	3/4"X16	7/8"X14	O910	16.7	12.7	40.5	27
Y1JO-08-12Z	3/4"X16	1.1/16"X12	O912	16.7	15.1	44.7	32
Y1JO-08-14Z	3/4"X16	1.3/16"X12	O914	16.7	15.1	43	36
Y1JO-10Z	7/8"X14	7/8"X14	O910	19.3	12.7	43	27
Y1JO-10-08Z	7/8"X14	3/4"X16	O908	19.3	11.1	41.5	24
Y1JO-10-12Z	7/8"X14	1.1/16"X12	O912	19.3	15.1	47.2	32
Y1JO-10-14Z	7/8"X14	1.3/16"X12	O914	19.3	15.1	45.5	36
Y1JO-12Z	1.1/16"X12	1.1/16"X12	O912	21.9	15.1	50	32
Y1JO-12-08Z	1.1/16"X12	3/4"X16	O908	21.9	11.1	49.2	30
Y1JO-12-10Z	1.1/16"X12	7/8"X14	O910	21.9	12.7	50.8	30
Y1JO-12-14Z	1.1/16"X12	1.3/16"X12	O914	21.9	15.1	48	36
Y1JO-12-16Z	1.1/16"X12	1.5/16"X12	O916	21.9	15.1	48	38
Y1JO-14Z	1.3/16"X12	1.3/16"X12	O914	22.6	15.1	50.5	36
Y1JO-14-12Z	1.3/16"X12	1.1/16"X12	O912	22.6	15.1	48.5	32
Y1JO-14-16Z	1.3/16"X12	1.5/16"X12	O916	22.6	15.1	50.5	38
Y1JO-16Z	1.5/16"X12	1.5/16"X12	O916	23.1	15.1	49	38
Y1JO-16-12Z	1.5/16"X12	1.1/16"X12	O912	23.1	15.1	52	36
Y1JO-16-14Z	1.5/16"X12	1.3/16"X12	O914	23.1	15.1	49	36
Y1JO-16-20Z	1.5/16"X12	1.5/8"X12	O920	23.1	15.1	52.7	50
Y1JO-20Z	1.5/8"X12	1.5/8"X12	O920	24.3	15.1	55	50
Y1JO-20-16Z	1.5/8"X12	1.5/16"X12	O916	24.3	15.1	56.5	46
Y1JO-20-24Z	1.5/8"X12	1.7/8"X12	O924	24.3	15.1	56.8	55
Y1JO-24Z	1.7/8"X12	1.7/8"X12	O924	27.5	15.1	60	55
Y1JO-24-20Z	1.7/8"X12	1.5/8"X12	O920	27.5	15.1	64.1	50
Y1JO-24-32Z	1.7/8"X12	2.1/2"X12	O932	27.5	15.1	64.1	70
Y1JO-32Z	2.1/2"X12	2.1/2"X12	O932	33.9	15.1	70.5	70



AJ

美制JIC外螺纹74°外锥 三通
JIC MALE 74° CONE TEE


代号 PART NO.	螺纹 THREAD			尺寸 DIMENSIONS			
	E	F	G	A	B	C	S1
YAJ-02Z	5/16"X24	5/16"X24	5/16"X24	21	21	21	11
YAJ-03Z	3/8"X24	3/8"X24	3/8"X24	22	22	22	11
YAJ-04Z	7/16"X20	7/16"X20	7/16"X20	24.5	24.5	24.5	11
YAJ-04-06-04Z	7/16"X20	9/16"X18	7/16"X20	26.6	26.9	26.6	14
YAJ-05-04-05Z	1/2"X20	7/16"X20	1/2"X20	26	26.6	26	14
YAJ-05Z	1/2"X20	1/2"X20	1/2"X20	26	26	26	14
YAJ-06-04-06Z	9/16"X18	7/16"X20	9/16"X18	26.9	26.6	26.9	14
YAJ-06Z	9/16"X18	9/16"X18	9/16"X18	26.9	26.9	26.9	14
YAJ-06-08-06Z	9/16"X18	3/4"X16	9/16"X18	30	32	30	19
YAJ-08Z	3/4"X16	3/4"X16	3/4"X16	32	32	32	19
YAJ-08-06-06Z	3/4"X16	9/16"X18	9/16"X18	32	30	30	19
YAJ-08-06-08Z	3/4"X16	9/16"X18	3/4"X16	32	30	32	19
YAJ-08-10-08Z	3/4"X16	7/8"X14	3/4"X16	34.8	37.8	34.8	22
YAJ-08-12-08Z	3/4"X16	1.1/16"X12	3/4"X16	37.9	44.2	37.9	27
YAJ-10Z	7/8"X14	7/8"X14	7/8"X14	37.8	37.8	37.8	22
YAJ-10-08-08Z	7/8"X14	3/4"X16	3/4"X16	37.8	34.8	34.8	22
YAJ-10-08-10Z	7/8"X14	3/4"X16	7/8"X14	37.8	34.8	37.8	22
YAJ-10-12-10Z	7/8"X14	1.1/16"X12	7/8"X14	41	44.2	41	27
YAJ-12Z	1.1/16"X12	1.1/16"X12	1.1/16"X12	44.2	44.2	44.2	27
YAJ-12-08-12Z	1.1/16"X12	3/4"X16	1.1/16"X12	44.2	37.9	44.2	27
YAJ-12-10-12Z	1.1/16"X12	7/8"X14	1.1/16"X12	44.2	41	44.2	27
YAJ-12-16-12Z	1.1/16"X12	1.5/16"X12	1.1/16"X12	48	49	48	33
YAJ-14Z	1.3/16"X12	1.3/16"X12	1.3/16"X12	47.5	47.5	47.5	30
YAJ-16Z	1.5/16"X12	1.5/16"X12	1.5/16"X12	49	49	49	33
YAJ-16-12-16Z	1.5/16"X12	1.1/16"X12	1.5/16"X12	49	48	49	33
YAJ-20Z	1.5/8"X12	1.5/8"X12	1.5/8"X12	56.5	56.5	56.5	41
YAJ-20-16-20Z	1.5/8"X12	1.5/16"X12	1.5/8"X12	56.5	54	56.5	41
YAJ-24Z	1.7/8"X12	1.7/8"X12	1.7/8"X12	62.5	62.5	62.5	48
YAJ-32Z	2.1/2"X12	2.1/2"X12	2.1/2"X12	78	78	78	63



DJ

美制JIC内螺纹74°内锥三通
JIC FEMALE 74° SEAT TEE


代号 PART NO.	螺纹 THREAD			尺寸 DIMENSIONS		
	E	F	G	A,B,C	S1	S2,S3,S4
YDJ-04Z	7/16"X20	7/16"X20	7/16"X20	9	11	14
YDJ-05Z	1/2"X20	1/2"X20	1/2"X20	9.5	11	17
YDJ-06Z	9/16"X18	9/16"X18	9/16"X18	10	14	19
YDJ-08Z	3/4"X16	3/4"X16	3/4"X16	11	16	22
YDJ-10Z	7/8"X14	7/8"X14	7/8"X14	13	22	27
YDJ-12Z	1.1/16"X12	1.1/16"X12	1.1/16"X12	14.5	24	32
YDJ-16Z	1.5/16"X12	1.5/16"X12	1.5/16"X12	15.18	33	41




1F

美制ORFS外螺纹O形圈平面密封
ORFS MALE O-RING

代号 PART NO.	螺纹 THREAD		O形圈 O-RING		尺寸 DIMENSIONS			
	E	F	E端	F端	A	B	L	S1
Y1F-04Z	9/16"X18	9/16"X18	O011	O011	10	10	27.5	17
Y1F-04-06Z	9/16"X18	11/16"X16	O011	O012	10	11.2	29.7	19
Y1F-04-08Z	9/16"X18	13/16"X16	O011	O014	10	13	32.5	22
Y1F-06Z	11/16"X16	11/16"X16	O012	O012	11.2	11.2	31.1	19
Y1F-06-08Z	11/16"X16	13/16"X16	O012	O014	11.2	13	33.8	22
Y1F-06-10Z	11/16"X16	1"X14	O012	O016	11.2	15.5	38	27
Y1F-08Z	13/16"X16	13/16"X16	O014	O014	13	13	35.4	22
Y1F-08-10Z	13/16"X16	1"X14	O014	O016	13	15.5	40	27
Y1F-08-12Z	13/16"X16	1.3/16"X12	O014	O018	13	17	43	32
Y1F-10Z	1"X14	1"X14	O016	O016	15.5	15.5	42.5	27
Y1F-10-12Z	1"X14	1.3/16"X12	O016	O018	15.5	17	45.5	32
Y1F-12Z	1.3/16"X12	1.3/16"X12	O018	O018	17	17	47.1	32
Y1F-12-16Z	1.3/16"X12	1.7/16"X12	O018	O021	17	17.5	45.5	38
Y1F-12-20Z	1.3/16"X12	1.11/16"X12	O018	O025	17	17.5	50.5	46
Y1F-16Z	1.7/16"X12	1.7/16"X12	O021	O021	17.5	17.5	49.3	41
Y1F-16-20Z	1.7/16"X12	1.11/16"X12	O021	O025	17.5	17.5	51.3	46
Y1F-16-24Z	1.7/16"X12	2"X12	O021	O029	17.5	17.5	53	55
Y1F-20Z	1.11/16"X12	1.11/16"X12	O025	O025	17.5	17.5	51.3	46
Y1F-20-24Z	1.11/16"X12	2"X12	O025	O029	17.5	17.5	53	55
Y1F-24Z	2"X12	2"X12	O029	O029	17.5	17.5	53	55




1C
1D




1C-RNW
1D-RNW

公制外螺纹 24° 锥
METRIC MALE 24° CONE
ISO 8434-1

代号 PART NO.		螺纹 THREAD		管子外径 TUBE O.D.		尺寸 DIMENSIONS				
接头体BODY	组件ASSEMBLY	E	F	D1	D2	I1	L1	S1	S2	S3
Y1C-12Z	1C-12RNWZ	M12X1.5	M12X1.5	6	6	10	39	12	14	14
Y1C-14Z	1C-14RNWZ	M14X1.5	M14X1.5	8	8	11	40	14	17	17
Y1C-16Z	1C-16RNWZ	M16X1.5	M16X1.5	10	10	13	42	17	19	19
Y1C-18Z	1C-18RNWZ	M18X1.5	M18X1.5	12	12	14	43	19	22	22
Y1C-22Z	1C-22RNWZ	M22X1.5	M22X1.5	15	15	16	46	24	27	27
Y1C-26Z	1C-26RNWZ	M26X1.5	M26X1.5	18	18	16	48	27	32	32
Y1C-30Z	1C-30RNWZ	M30X2	M30X2	22	22	20	52	32	36	36
Y1C-36Z	1C-36RNWZ	M36X2	M36X2	28	28	21	54	41	41	41
Y1C-45Z	1C-45RNWZ	M45X2	M45X2	35	35	20	63	46	50	50
Y1C-52Z	1C-52RNWZ	M52X2	M52X2	42	42	21	66	55	60	60
Y1D-14Z	1D-14RNWZ	M14X1.5	M14X1.5	6	6	16	45	14	17	17
Y1D-16Z	1D-16RNWZ	M16X1.5	M16X1.5	8	8	18	47	17	19	19
Y1D-18Z	1D-18RNWZ	M18X1.5	M18X1.5	10	10	17	49	19	22	22
Y1D-20Z	1D-20RNWZ	M20X1.5	M20X1.5	12	12	19	51	22	24	24
Y1D-22Z	1D-22RNWZ	M22X1.5	M22X1.5	14	14	22	57	24	27	27
Y1D-24Z	1D-24RNWZ	M24X1.5	M24X1.5	16	16	21	57	27	30	30
Y1D-30Z	1D-30RNWZ	M30X2	M30X2	20	20	23	66	32	36	36
Y1D-36Z	1D-36RNWZ	M36X2	M36X2	25	25	26	74	41	46	46
Y1D-42Z	1D-42RNWZ	M42X2	M42X2	30	30	27	80	46	50	50
Y1D-52Z	1D-52RNWZ	M52X2	M52X2	38	38	29	90	55	60	60




1CB
1DB



1CB-RNW
1DB-RNW

公制外螺纹24°锥/
英管螺纹60°锥密封
METRIC MALE 24° CONE /
BSP 60° CONE SEAL

代号 PART NO.		螺纹 THREAD		管子外径 D1 TUBE O.D.	尺寸 DIMENSIONS					
接头体BODY	组件ASSEMBLY	E	F		B	I1	L1	L	S1	S2
Y1CB-12-02Z	1CB-12-02RNWZ	M12X1.5	G1/8"X28	6	10	8	23	24	14	14
Y1CB-12-04Z	1CB-12-04RNWZ	M12X1.5	G1/4"X19	6	12	9	24	28	19	14
Y1CB-14-02Z	1CB-14-02RNWZ	M14X1.5	G1/8"X28	8	10	8	23	25	14	17
Y1CB-14-04Z	1CB-14-04RNWZ	M14X1.5	G1/4"X19	8	12	9	25	28	19	17
Y1CB-14-06Z	1CB-14-06RNWZ	M14X1.5	G3/8"X19	8	13.5	9	24	28.5	22	17
Y1CB-16-04Z	1CB-16-04RNWZ	M16X1.5	G1/4"X19	10	12	10	25	28	19	19
Y1CB-16-06Z	1CB-16-06RNWZ	M16X1.5	G3/8"X19	10	13.5	12.5	25	33	22	19
Y1CB-16-08Z	1CB-16-08RNWZ	M16X1.5	G1/2"X14	10	16	11	26	32	27	19
Y1CB-18-04Z	1CB-18-04RNWZ	M18X1.5	G1/4"X19	12	12	10	25	29	19	22
Y1CB-18-06Z	1CB-18-06RNWZ	M18X1.5	G3/8"X19	12	13.5	10	25	30.5	22	22
Y1CB-18-08Z	1CB-18-08RNWZ	M18X1.5	G1/2"X14	12	16	11	26	33	27	22
Y1CB-18-12Z	1CB-18-12RNWZ	M18X1.5	G3/4"X14	12	18.5	11	26	36.5	32	22
Y1CB-22-06Z	1CB-22-06RNWZ	M22X1.5	G3/8"X19	15	13.5	11	26	31.5	24	27
Y1CB-22-08Z	1CB-22-08RNWZ	M22X1.5	G1/2"X14	15	16	12	27	34	27	27
Y1CB-26-08Z	1CB-26-08RNWZ	M26X1.5	G1/2"X14	18	16	11.5	28	35	27	32
Y1CB-26-12Z	1CB-26-12RNWZ	M26X1.5	G3/4"X14	18	18.5	11.5	28	35.5	32	32
Y1CB-30-12Z	1CB-30-12RNWZ	M30X2	G3/4"X14	22	18.5	13.5	30	39.5	32	36
Y1CB-36-16Z	1CB-36-16RNWZ	M36X2	G1"X11	28	20.5	14.5	31	42.5	41	41
Y1CB-45-20Z	1CB-45-20RNWZ	M45X2	G1.1/4"X11	35	20.5	15.5	37	45.5	50	50
Y1CB-52-24Z	1CB-52-24RNWZ	M52X2	G1.1/2"X11	42	23	16	39	50	55	60
Y1DB-14-04Z	1DB-14-04RNWZ	M14X1.5	G1/4"X19	6	12	13	28	30	19	17
Y1DB-16-04Z	1DB-16-04RNWZ	M16X1.5	G1/4"X19	8	12	13	28	32	19	19
Y1DB-16-06Z	1DB-16-06RNWZ	M16X1.5	G3/8"X19	8	13.5	15	32	35.5	22	19
Y1DB-18-04Z	1DB-18-04RNWZ	M18X1.5	G1/4"X19	10	12	12.5	29	32	19	22
Y1DB-18-06Z	1DB-18-06RNWZ	M18X1.5	G3/8"X19	10	13.5	14.5	31	33.5	22	22
Y1DB-18-08Z	1DB-18-08RNWZ	M18X1.5	G1/2"X14	10	16	14.5	31	36	27	22
Y1DB-20-04Z	1DB-20-04RNWZ	M20X1.5	G1/4"X19	12	12	14.5	31	34	22	24
Y1DB-20-06Z	1DB-20-06RNWZ	M20X1.5	G3/8"X19	12	13.5	14.5	31	35.5	22	24
Y1DB-20-08Z	1DB-20-08RNWZ	M20X1.5	G1/2"X14	12	16	14.5	31	38	27	24
Y1DB-22-08Z	1DB-22-08RNWZ	M22X1.5	G1/2"X14	14	16	16	34	40	27	27
Y1DB-24-06Z	1DB-24-06RNWZ	M24X1.5	G3/8"X19	16	13.5	15.5	34	37.5	27	30
Y1DB-24-08Z	1DB-24-08RNWZ	M24X1.5	G1/2"X14	16	16	15.5	34	40	27	30
Y1DB-24-12Z	1DB-24-12RNWZ	M24X1.5	G3/4"X14	16	18.5	17.5	36	44.5	32	30
Y1DB-30-12Z	1DB-30-12RNWZ	M30X2	G3/4"X14	20	18.5	17.5	39	48.5	32	36
Y1DB-36-08Z	1DB-36-08RNWZ	M36X2	G1/2"X14	25	16	19	43	48	41	46
Y1DB-36-12Z	1DB-36-12RNWZ	M36X2	G3/4"X14	25	18.5	19	43	50.5	41	46
Y1DB-36-16Z	1DB-36-16RNWZ	M36X2	G1"X11	25	20.5	20	44	52.5	41	46
Y1DB-42-20Z	1DB-42-20RNWZ	M42X2	G1.1/4"X11	30	20.5	21.5	48	54.5	50	50
Y1DB-52-24Z	1DB-52-24RNWZ	M52X2	G1.1/2"X11	38	23	23	54	62	55	60



FL
FS

SAE 对开法兰夹
SAE SPLIT FLANGE CLAMP

代号 PART NO.	法兰规格 FLANGE SIZE	尺寸 DIMENSIONS						配用螺栓 BOLT
		A	B	d	h	M	N	
3000PSI								
YFL-08Z	1/2"	54	45.6	9	6.2	38.1	17.5	M8X25
YFL-12Z	3/4"	65.6	51.8	11	6.2	47.6	22.2	M10X30
YFL-16Z	1"	70.5	58.4	11	7.5	52.4	26.2	M10X30
YFL-20Z	1.1/4"	79	72.6	11	7.5	58.7	30.2	M10X30
YFL-24Z	1.1/2"	94	82.2	13.5	7.5	69.9	35.7	M12X35
YFL-32Z	2"	102	96.4	13.5	9	77.8	42.9	M12X35
YFL-40Z	2.1/2"	115	108.2	13.5	9	88.9	50.8	M12X40
YFL-48Z	3"	134.4	130.6	17	9	106.4	61.9	M16X50
6000PSI								
YFS-08Z	1/2"	56.8	47.2	9	7.2	40.5	18.2	M8X30
YFS-12Z	3/4"	70.8	60	11	8.26	50.8	23.8	M10X35
YFS-16Z	1"	81.15	69.6	13	9	57.2	27.8	M12X45
YFS-20NZ	1.1/4"	96.68	77.2	13	9.8	66.6	31.8	M12X45
YFS-20Z	1.1/4"	96.68	77.2	15	9.8	66.6	31.8	M14X50
YFS-24Z	1.1/2"	113.38	95	17	12	79.4	36.6	M16X55
YFS-32Z	2"	133	113.8	21	12	96.8	44.4	M20X70
注: 配用螺栓需另行订货。 The bolt need ordered another.								